

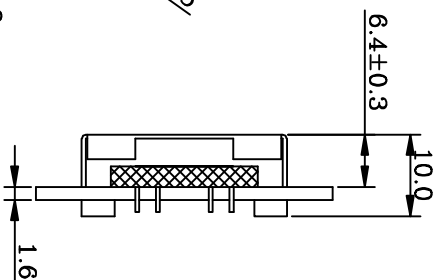


请客户签字回传:

版本	更改内容:	设计日期:
00	在JBC1602A02-021基础上改为侧部光 铁壳加高	2011.3.31

PIN NO	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

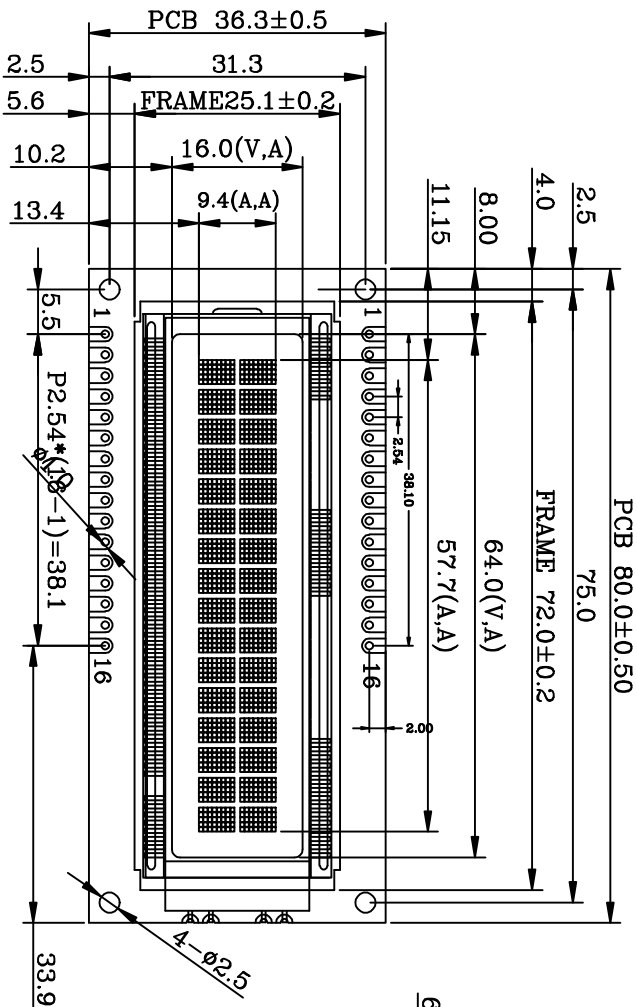

NOTES:

1. DRIVE METHOD: 1/16DUTY, 1/5BIAS,VOP4.5V, VDD5.0V.
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: STN(Y-G), TRANSPARENT/POSITIVE.
4. OPERATING TEMP: -0 TO 50°C.
5. STORAGE TEMP: -10 TO 60°C.
6. CONNECTION:COB
7. BACK LIGHT:YELLOW-GREEN,2DIES.
8. IC:SPIC780D,SPIC100A
9. NOT DIMENSION TOLERANCES IS ±0.2.



深圳市兴宇合电子有限公司

LCM工程图

SCALE:	比例:	MODEL NUMBER:	客户型号:
10 <sup>1</sup> 1	1:1	JBC1602A02-021	
DATE:	日期:	DESIGNER:	设计人:

DO NOT SCALE THESE DRAWINGS.

PROJECTION