
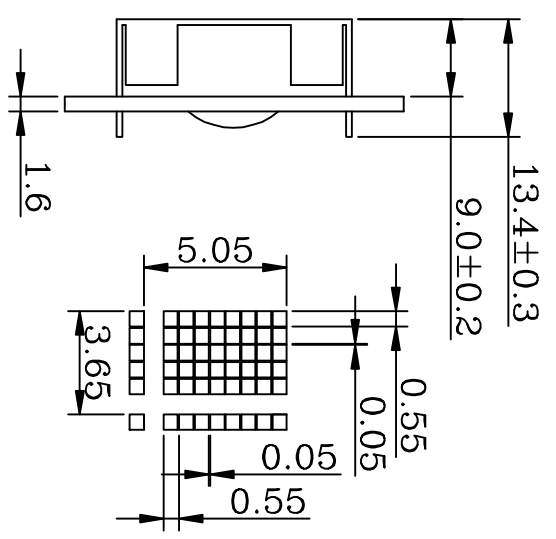


REV	DESCRIPTION:	DATE
A00	First Issue	2010.08.06

PIN NO.	SYMBOL
1	VSS
2	Vdd
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

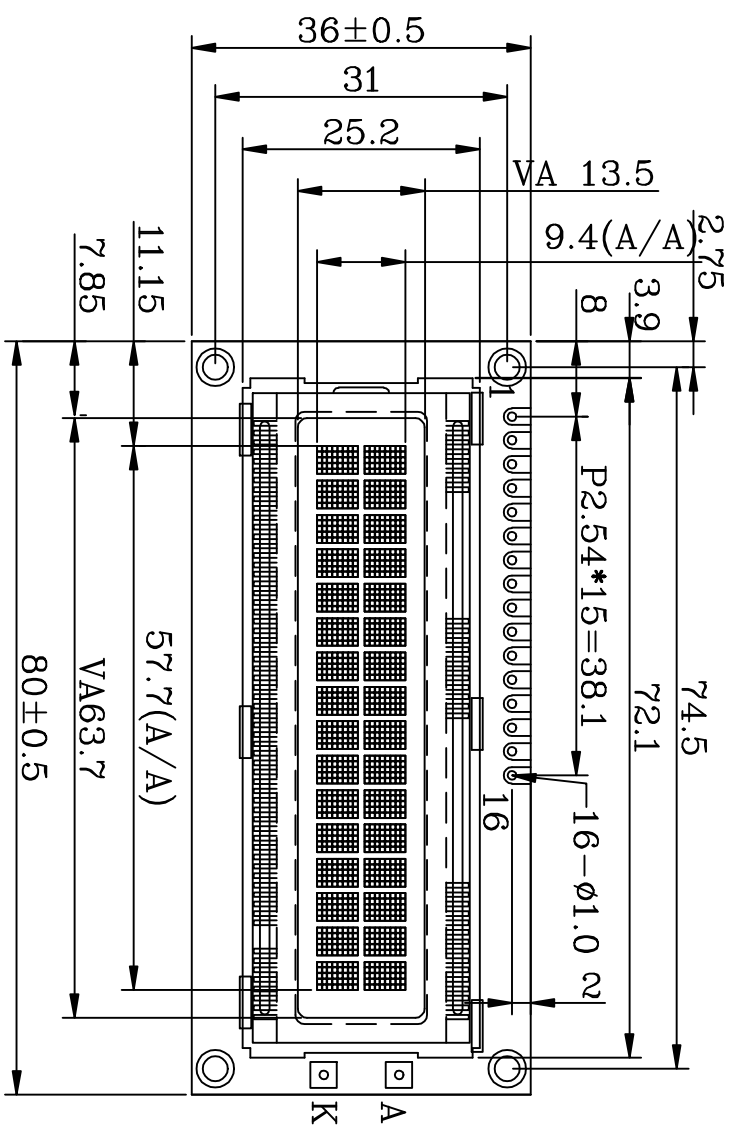

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD= 4.7V
 DISPLAY MODE : STN(BLUE) TRANSMISSIVE NEGATIVE MODE
 BACK LIGHT ITEM: WHITE SIDE 2PCS 3.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: ST7066U

DESCRIPTION:
C/D 外型图

深圳市兴宇合电子有限公司

SCALE	1:1	UNIT	mm
SHEET	1 OF 1		
GENERAL TOL.	± 0.2mm		
APPROVALS	DATE		
APPR			
CHEK			
DATE	2010.08.06		
MODEL NUMBER:	JBC1602A00-08V		
PART NO.			

1 2 3 4 5 6