
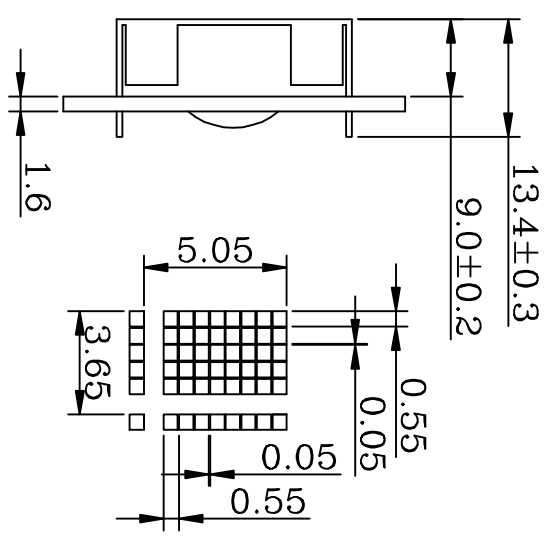


REV	DESCRIPTION:	DATE
00	在 JBC1602A00-00T-3 基础上进行更改, 新开 B2	2011/11/07

PIN NO.	SYMBOL
1	VSS
2	Vdd
3	Vo
4	RS
5	R/ $\bar{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

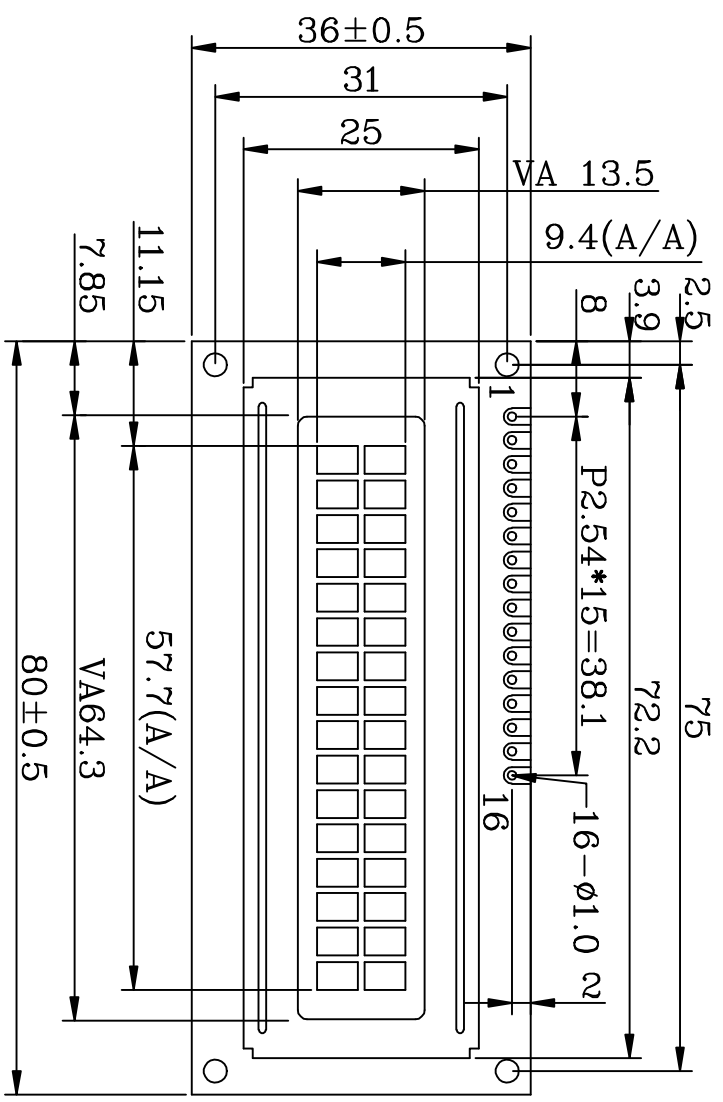

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD= 4.5V  
 DISPLAY MODE : STN(Y/G) TRANSPARENT P MODE  
 BACK LIGHT ITEM: Y/G(BOTTOM) 5.0V  
 LCM OPERATING VOLTAGE:5.0V  
 CONTROLLER/DRIVER IC: ST7066U

**C/D 外型图**

深圳市兴宇合电子有限公司

DESCRIPTION:		SCALE: 1:1		SHEET 1 OF 1	
GENERAL TOL. ± 0.2mm		UNIT: mm		DATE:	
APPROVALS:		DATE:		MODEL NUMBER: JBC1602A00-00T-3	
APPR:		DATE:		PART NO:	
CHK:		DATE:		DO NOT SCALE THESE DIMENSIONS. PROJECTION:	
DRAWN: LAO		2011.11.07			