
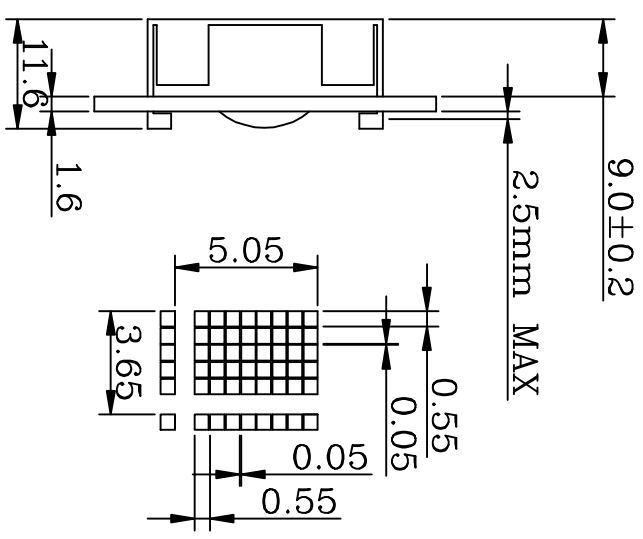


REV	DESCRIPTION:	DATE
A00	First Issue	20101127

PIN NO.	SYMBOL
1	VSS
2	Vdd
3	Vo
4	RS
5	R/ \bar{W}
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

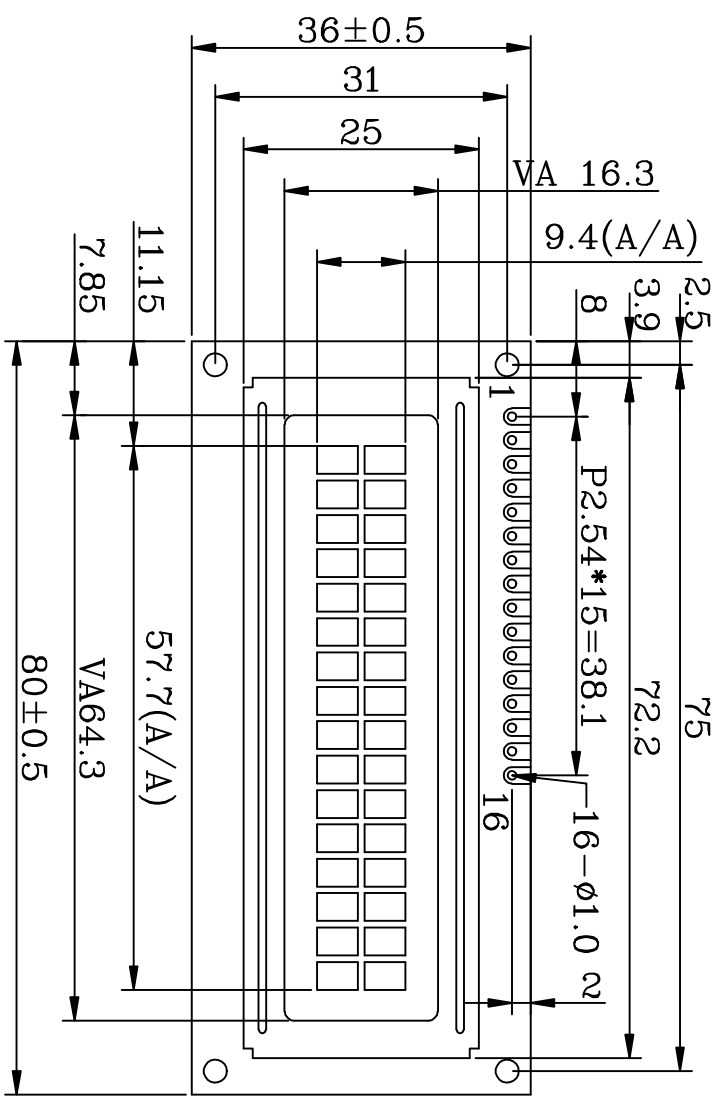

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD= 4.5V
 DISPLAY MODE : STN(Y/G) TRANSPARENT P MODE
 BACK LIGHT ITEM: Y/G(BOTTOM) 5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: ST7066U

DESCRIPTION:

C/D 外型图

深圳市兴宇合电子有限公司

SCALE	1 OF 1	MODEL NUMBER:	JBC1602A00-00T-5
GENERAL TOL.	± 0.2mm	DATE	
APPROVALS		PROJECTION	
DATE		PART NO.	
CHK		DO NOT SCALE THESE DIMENSIONS.	
DRW			

1 2 3 4 5 6