
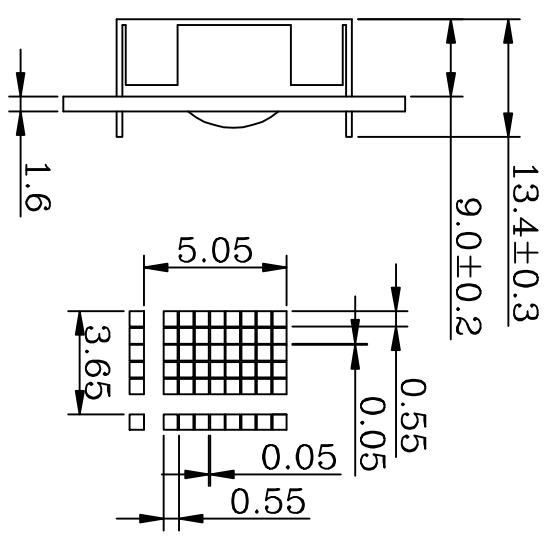


REV	DESCRIPTION:	DATE
A00	First Issue	20091102

PIN NO.	SYMBOL
1	VSS
2	Vdd
3	Vo
4	RS
5	R/ $\bar{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

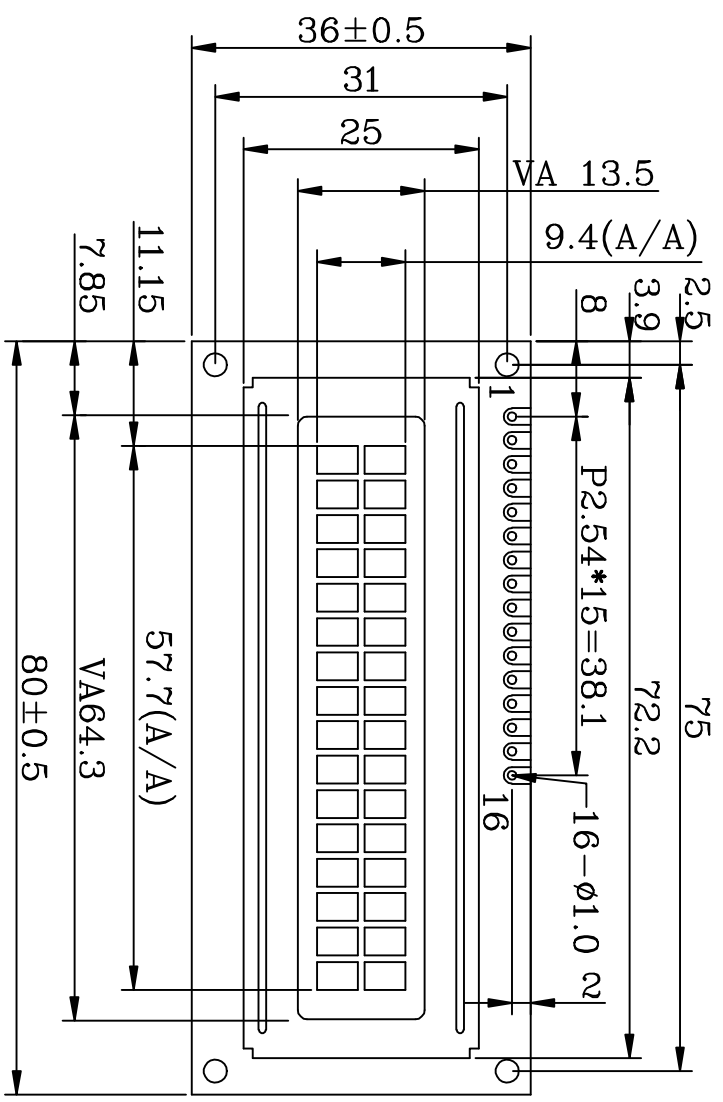

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD= 4.5V  
 DISPLAY MODE : STN(Y/G) TRANSPARENT P MODE  
 BACK LIGHT ITEM: Y/G(BOTTOM) 5.0V  
 LCM OPERATING VOLTAGE:5.0V  
 CONTROLLER/DRIVER IC: ST7066U

**DESCRIPTION:**

**C/D 外型图**

**深圳市兴宇合电子有限公司**

SCALE	1 OF 1	UNIT	mm
GENERAL TOL.	± 0.2mm	DATE	
APPROVALS		MODEL NUMBER:	JBC1602A00-00T-3
DATE		PROJECTION	1ST ANGLE
APP		PART NO.	
CHEK			
DRW'N	20091102		

1 2 3 4 5 6