


PIN NO.	SYMBOL
1	VSS
2	Vdd
3	Vo
4	RS
5	R/ \bar{W}
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

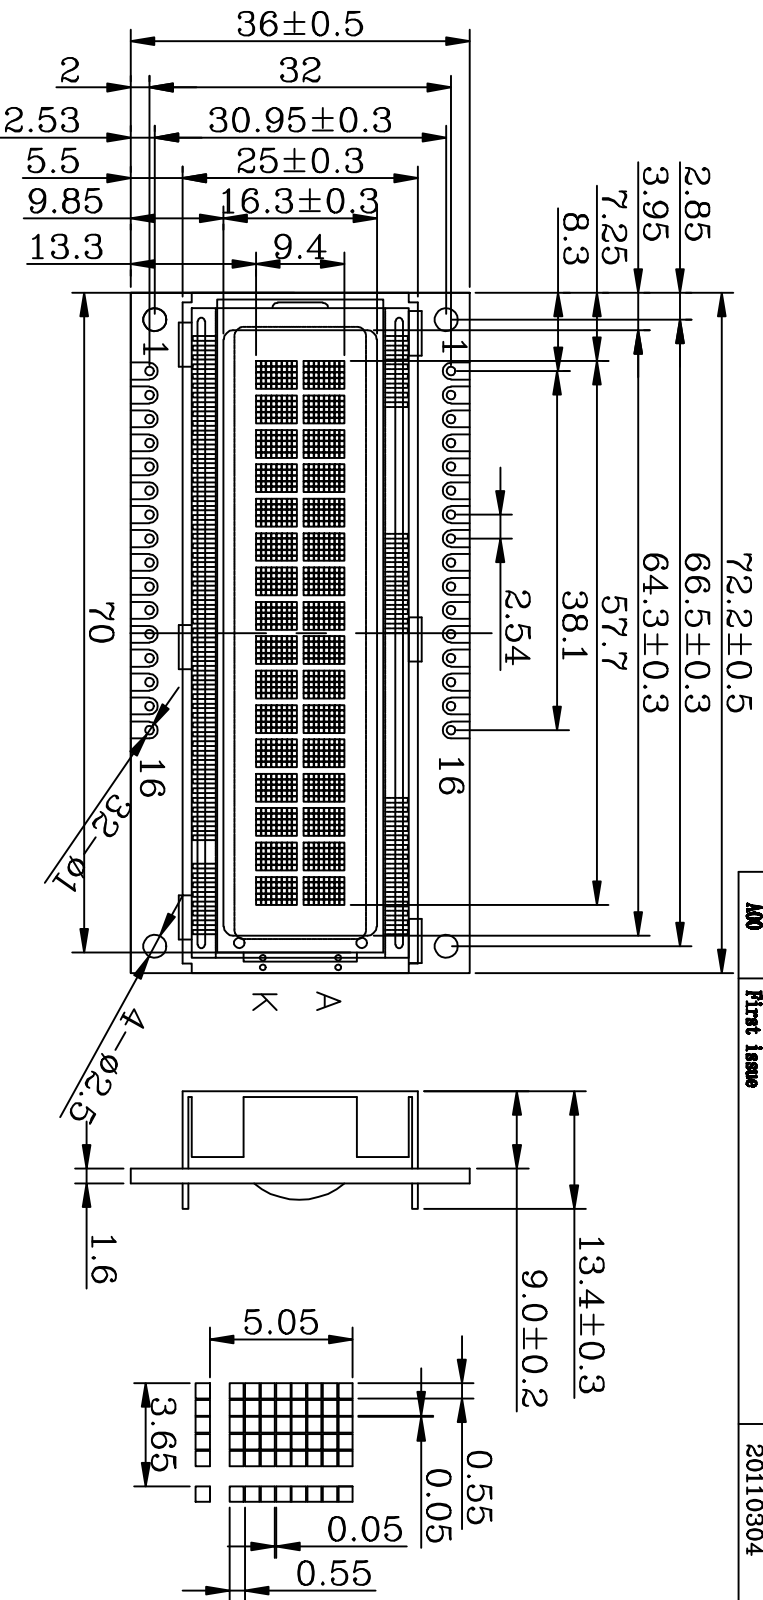

请注意，我司结构长度大于提供样品。是否对装机有影响！！！！

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD= 4.5V
 DISPLAY MODE : STN(Y/G) TRANSPARENT POSITIVE MODE
 BACK LIGHT ITEM: Y/G(BOTTOM) 5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: ST7066U

REV	DESCRIPTION:	DATE
A00	First Issue	20110304

DESCRIPTION:		C/D 外型图	
SCALE	1:1	MODEL NUMBER:	JBC1692A00-00Y-7
SHEET	1 OF 1	DATE	201104
GENERAL TOL.	± 0.2mm	APPROVALS	
APPROVALS		DATE	
APPR		DATE	
CHEK		DATE	
DRWN	zjp	DATE	201104
DO NOT SCALE THESE DIMENSIONS.		PROJECTION	
PART NO:			

深圳市兴宇合电子有限公司

1 2 3 4 5 6