
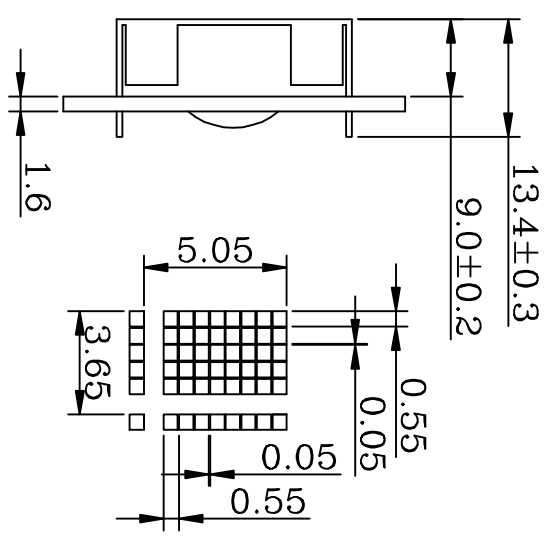


| REV | DESCRIPTION: | DATE |
|-----|--------------|----------|
| A00 | First Issue | 20090526 |

| PIN NO. | SYMBOL |
|---------|--------------|
| 1 | VSS |
| 2 | Vdd |
| 3 | Vo |
| 4 | RS |
| 5 | R/ \bar{W} |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | A |
| 16 | K |

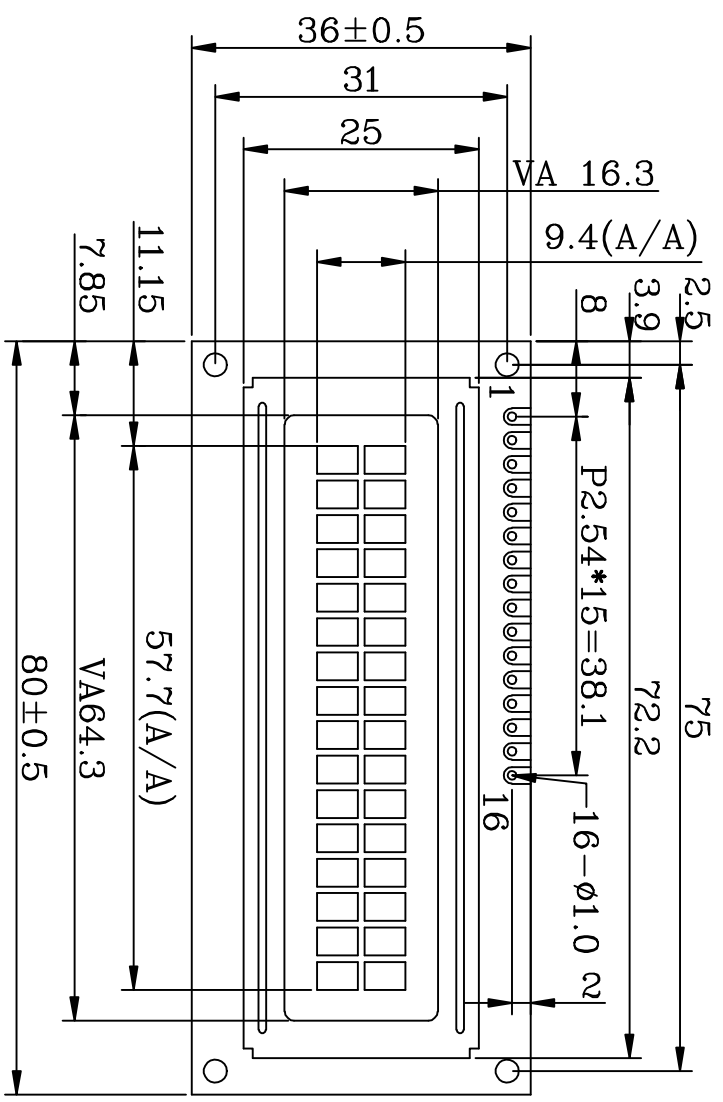

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20C TO +70°C
 VIEWING DIRECTION : 6 0°CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD= 4.5V
 DISPLAY MODE : STN(Y/G) TRANSPARENT P MODE
 BACK LIGHT ITEM: Y/G(BOTTOM) 5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: SPLC780D

DESCRIPTION:

C/D 外型图

深圳市兴宇合电子有限公司

| | | | | |
|--------------|---------|--------------------------------|----------------|----------|
| SCALE | 1 OF 1 | MODEL NUMBER: | JBC1602A00-00Y | PART NO: |
| GENERAL TOL. | ± 0.2mm | DATE | | |
| APPROVALS | | DO NOT SCALE THESE DIMENSIONS. | PROJECTION | |
| APPR | | | | |
| CHEK | | | | |
| DRWNS | DAP | | | |