


请确认回传:

REV	DESCRIPTION:	DATE
A00	First Issue	2011.12.14

PIN	NAME
1	V _{SS}
2	V _{dd}
3	V _o
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

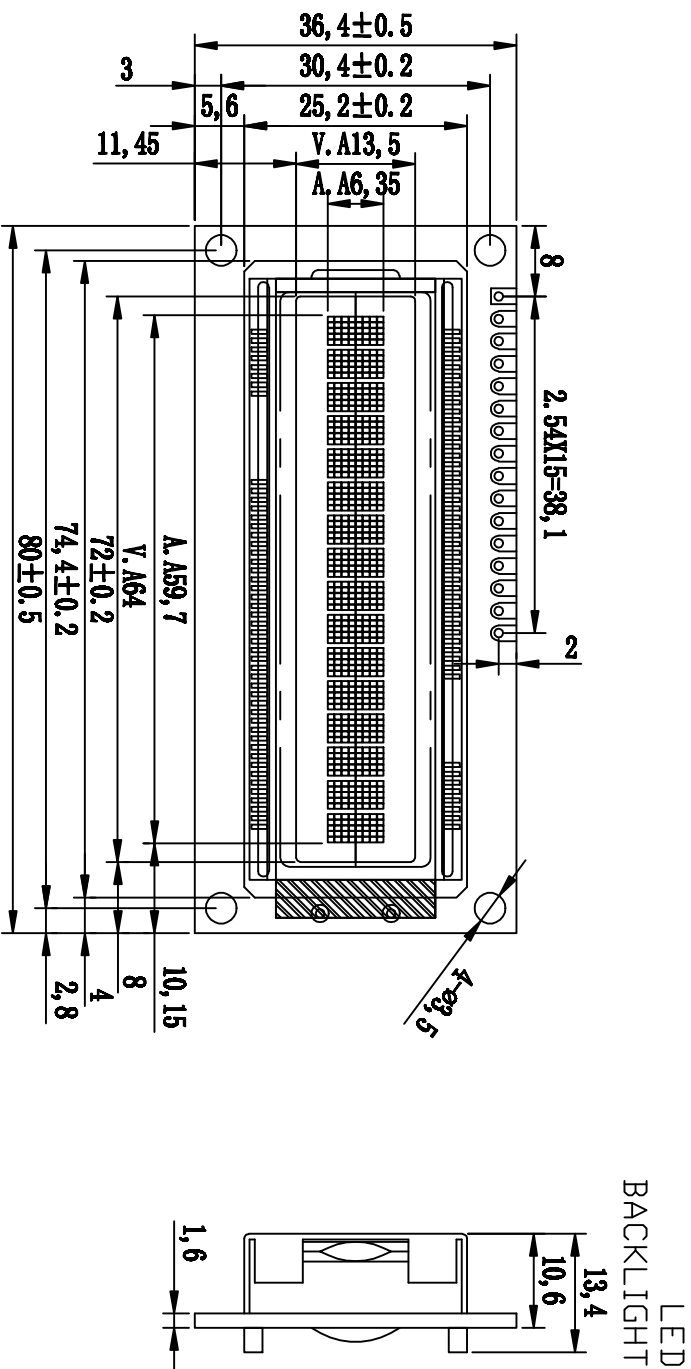

SPECIFICATIONS

STORAGE TEMP : -20°C TO +80°C
 OPERATING TEMP : -10°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD=4.5V VDD=5.0V
 DISPLAY MODE : FSTN TRANSPARENT POSITIVE MODE
 BACK LIGHT ITEM: WHITE(SIDE) 2PCS SMD I<30MA
 CONTROLLER/DRIVER IC: ST7066U EQU **

C/D 外型图

深圳市兴宇合电子有限公司

DESCRIPTION:		DATE	
SCALE	1:1	DATE	
SHEET	1 OF 1	DATE	
GENERAL TOL.	± 0.2mm	DATE	
APPROVALS		DATE	
APP:		DATE	
CHEK:		DATE	
DRWN: ZGS		DATE	
MODEL NUMBER: JBC1601A00-41W		PART NO:	
DO NOT SCALE THIS DRAWING.		PROJECTION	