


请确认回传:

REV	DESCRIPTION:	DATE
A00	First Issue	20110302

PIN	NAME
1	V _{SS}
2	V _{DD1}
3	V _O
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

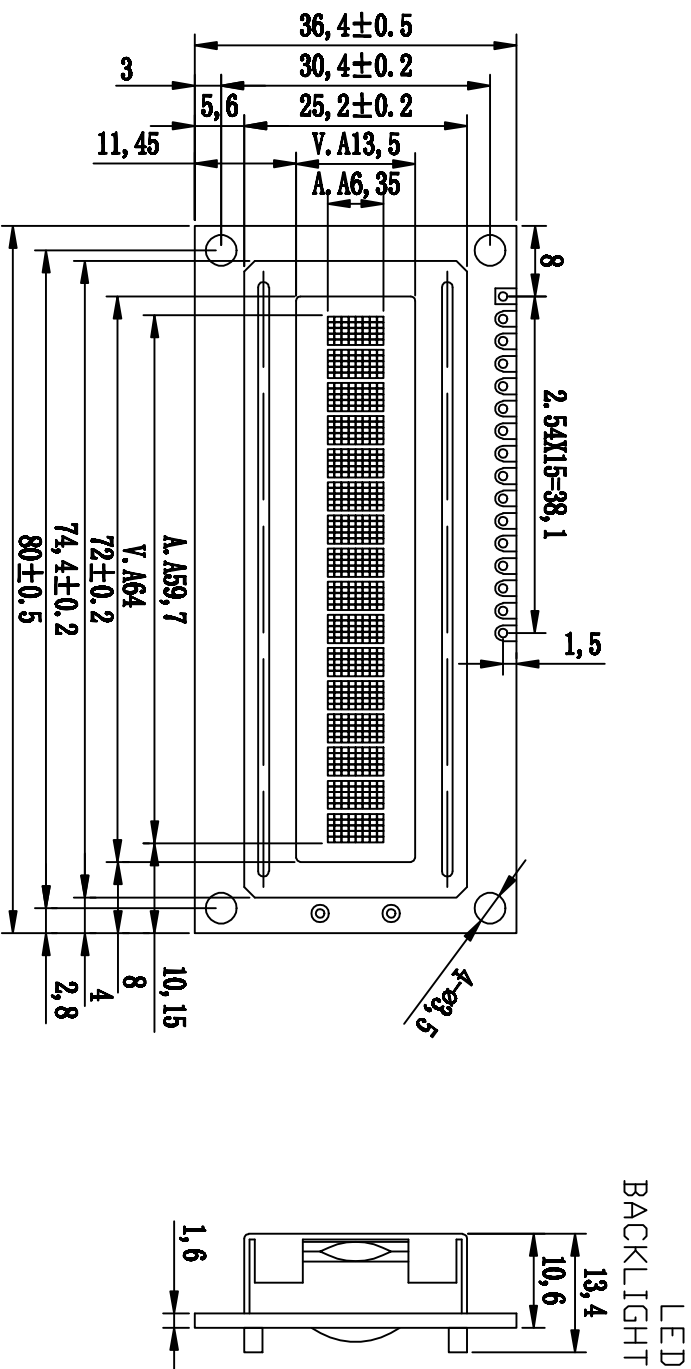

SPECIFICATIONS

STORAGE TEMP : -10°C TO +60°C
 OPERATING TEMP : 0°C TO +55°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD= 5.0V
 DISPLAY MODE : STN(blue) TRANSMISSIVE NEGATIVE MODE
 BACK LIGHT ITEM: WHITE(SIDE) 5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: SPLC780D

C/D 外型图

深圳市兴宇合电子有限公司

DESCRIPTION:		MODEL NUMBER:		PART NO.	
SCALE	1:1	JBC1601A00-10W-1			
SHEET	1 OF 1				
GENERAL TOL.	± 0.2mm				
APPROVALS	DATE				
APP:					
CHEK:					
DRWN: PTP					