


请客户签字回传:

版本	更改内容:	设计日期:	签名
00	FIRST ISSUE	2010.11.12	
01	为了显示效果比较好,更改IC	2010.11.17	

PIN NO	SYMBOL
1	V _{SS}
2	V _{DD}
3	V _O
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K
17	CS1
18	VR
19	DATA
20	NC

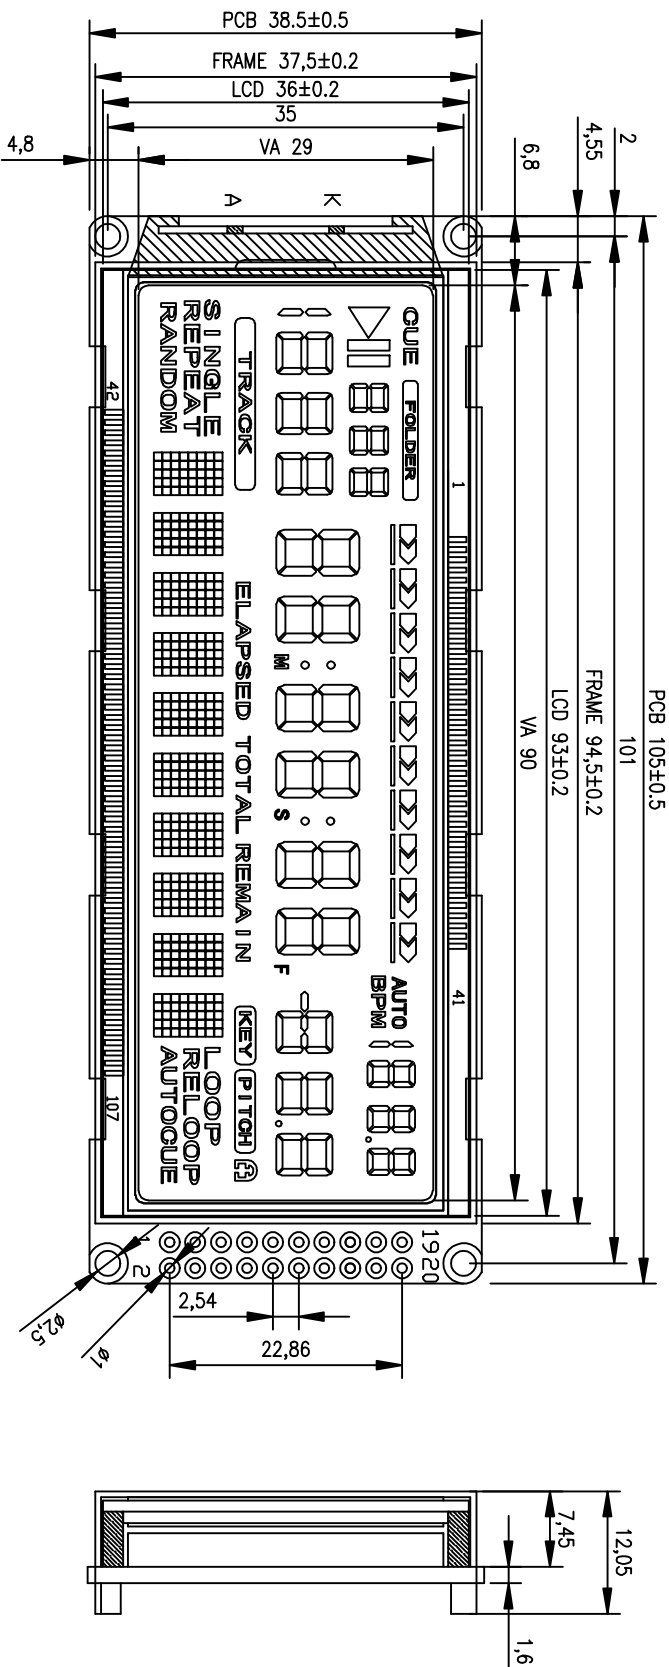

SPECIFICATIONS:

1. DRIVE METHOD: 1/8D,1/4B, VOP4.5V, VDD 5V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN,TRANSMISSIVE/NEGATIVE.
4. OPERATING TEMP: 0 TO 50°C.
5. STORAGE TEMP: -10 TO 60°C.
6. IC: ST7066+ST7065+HT1622 OR EQU.
7. BACKLIGHT: WHITE 3pcs 1led<60ma



深圳市兴宇合电子有限公司

LCM工程图纸

MODEL NUMBER
JBC1001A00



C/D

SCALE	1:1
比例	1:1
DATE	
DATE	
DESIGNER	
DATE	

SCALE: 1:1
DATE: 2010.11.17
DESIGNER: JBC

DO NOT SCALE THIS DRAWING
PROJECTION