
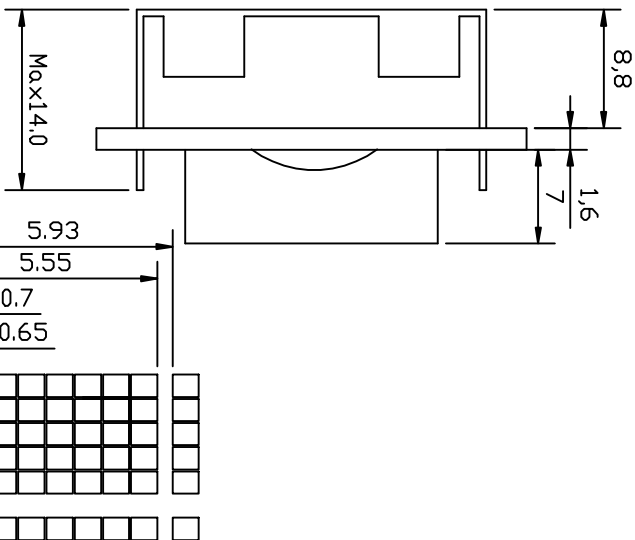


| PIN | NAME |
|-----|------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | RS |
| 5 | R/W |
| 6 | E |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | A |
| 16 | K |

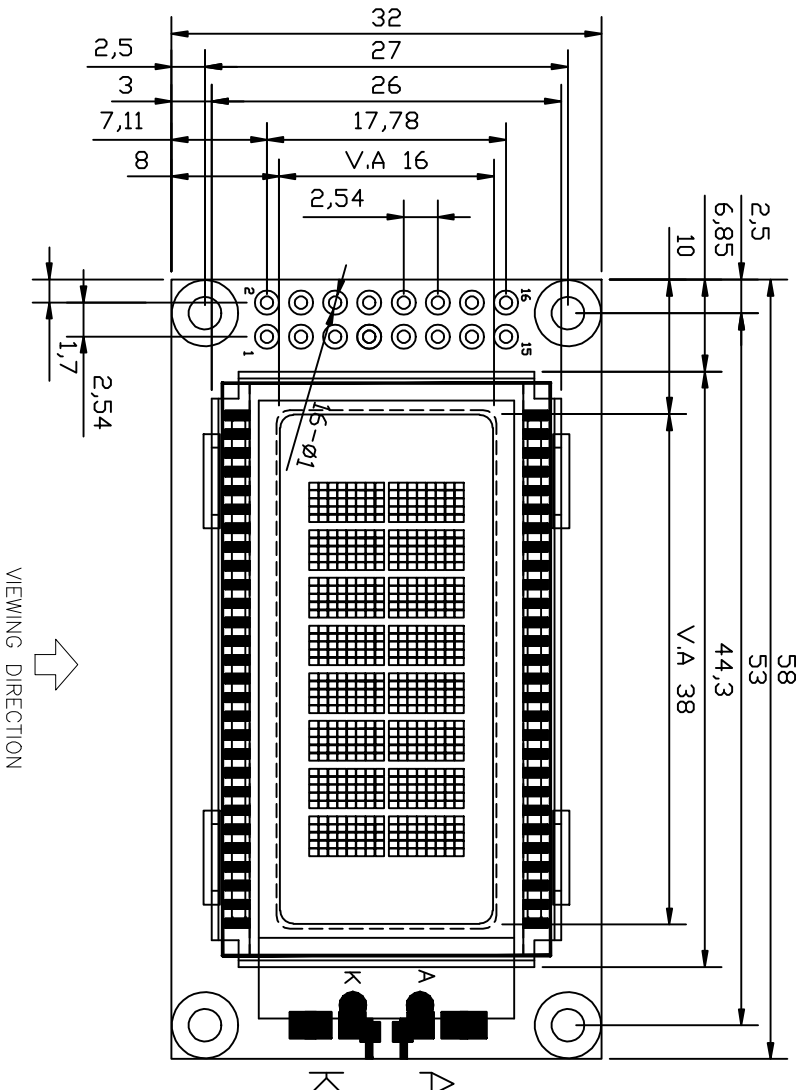

SPECIFICATIONS

STORAGE TEMP : -10°C TO +60°C
 OPERATING TEMP : 0°C TO +50°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD=5V
 DISPLAY MODE : STN,Y/G,Transflective,MODE
 BACKLIGHT: YELLOW GREEN

| REV | DESCRIPTION: | DATE |
|-----|--------------|----------|
| A00 | First issue | 20100301 |

DESCRIPTION:

C/D 外型图

深圳市兴宇合电子有限公司

| | | | | |
|--------------|----------|---|----------------|----------|
| SCALE | FTT | MODEL NUMBER: | JBC0802A01-02Y | PART NO: |
| SHEET | 1 OF 1 | DATE | | |
| GENERAL TOL. | UNIT | DO NOT SCALE THESE DIMENSIONS. PROJECTION | | |
| ± 0.2mm | mm | | | |
| APPROVALS | | | | |
| DATE | | | | |
| APP: | | | | |
| CHEK: | | | | |
| DRWN: WJP | 20100811 | | | |