

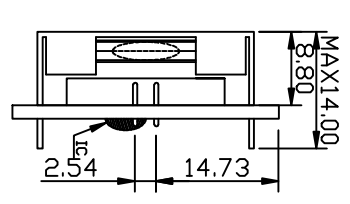


请客户签字回传:

PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED A
16	LED K

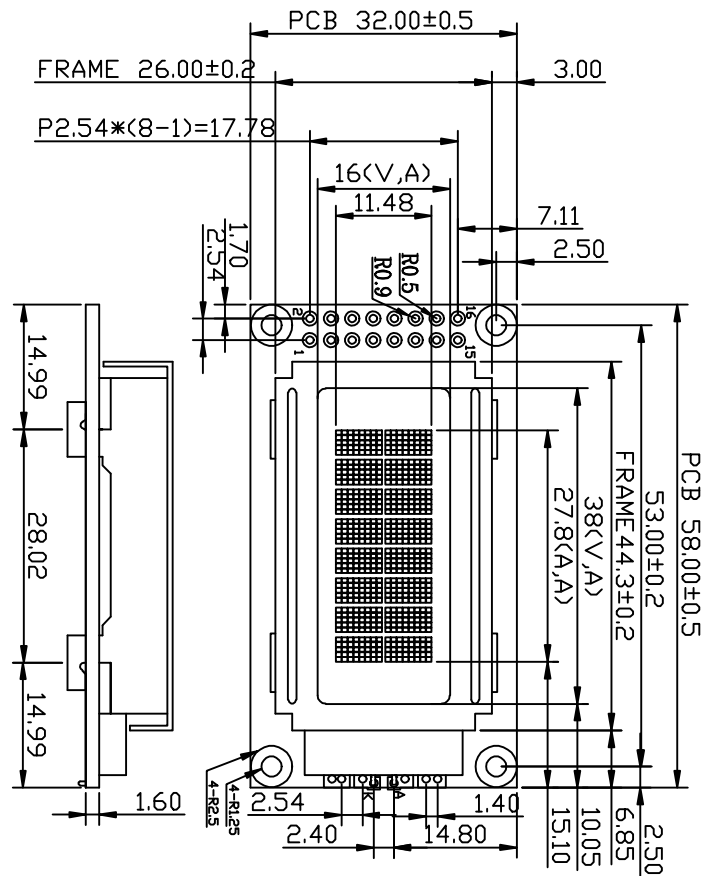

NOTES:

1. DRIVE METHOD: 1/16DUTY, 1/5BIAS, VOP3.3V, VDD3.3V.
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: STN(Y-G), TRANSPARENTIVE/POSITIVE.
4. OPERATING TEMP: 0 TO 50°C.
5. STORAGE TEMP: -10 TO 60°C.
6. CONNECTION: COB
7. BACK LIGHT: Y/G SIDE 3.0V 1PCS. I<=20MA
8. IC: ST7066 OR EQU
9. NOT DIMENSION TOLERANCES IS ±0.2.

版本	更改内容:	设计日期:
00	FIRST ISSUE	2011.03.24

深圳市兴宇合电子有限公司

LCM工程图

客户型号:

SCALE: 1:1	比例: 1:1	MODEL NUMBER: J1C0902A01-02R-A31	DO NOT SCALE THIS DRAWING.
DATE: 10F 1	日期: 10F 1	PROJECTION: 第一角投影	
DESIGNER: 141	设计人: 141		
CHECKER: 141	审核人: 141		

1 2 3 4 5 6