


PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W(A)
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED_A
16	LED_K

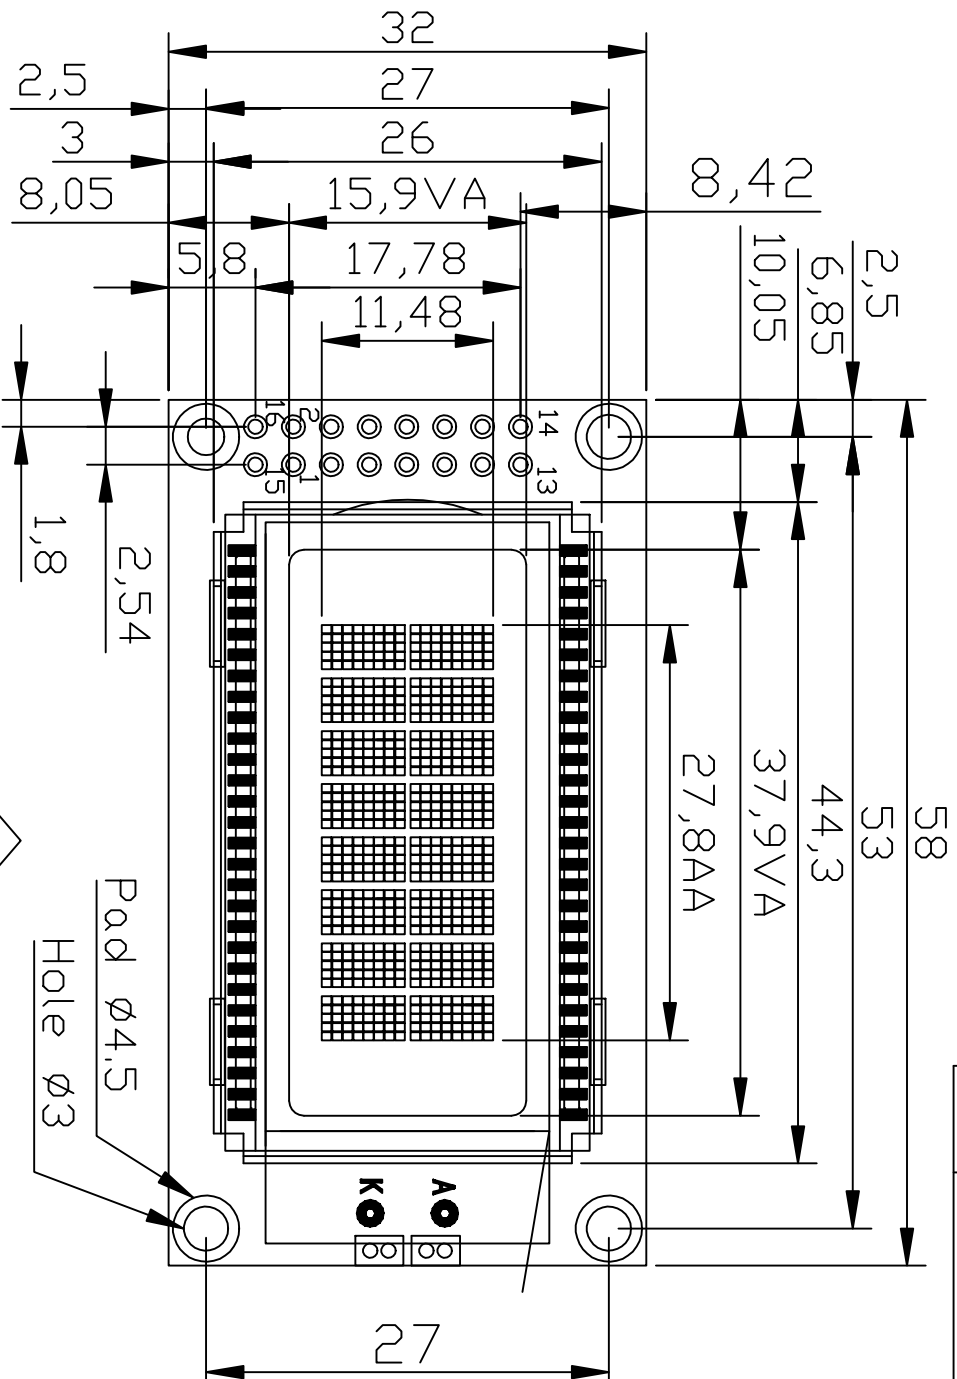

VIEWING DIRECTION

SPECIFICATIONS

STORAGE TEMP : -20°C TO +70°C  
OPERATING TEMP : -10°C TO +60°C  
VIEWING DIRECTION : 6 O'CLOCK  
DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=3.8V  
DISPLAY MODE : STN,(Y-G),Transflective,POSITIVE,MODE  
BACKLIGHT: Y-G color

REV	DESCRIPTION:	DATE
A00	First issue	20100324

DESCRIPTION:		C/D 结构图	
SCALE	FIG	<div>深圳市兴宇合电子有限公司</div>	
SHEET 1 OF 1	UNIT		
GENERAL TOL. ± 0.2mm	DATE		
APPROVALS	DATE		
APP:			
CHECK			
DRWN. FIG	20100304		
DO NOT SCALE THIS DRAWING.		PROJECTION	
MODEL NUMBER: JBC0602A04-00F		<div></div>	
		PART NO:	

深圳市兴宇合电子有限公司

