
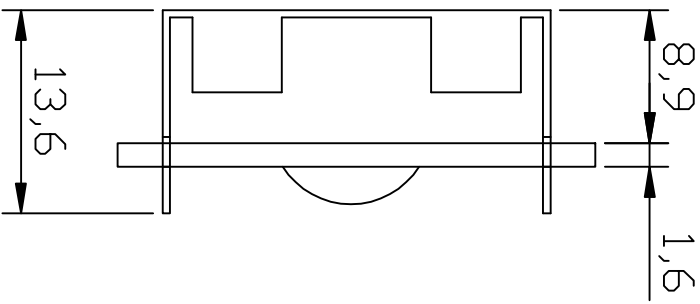


PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W(A)
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED_A
16	LED_K

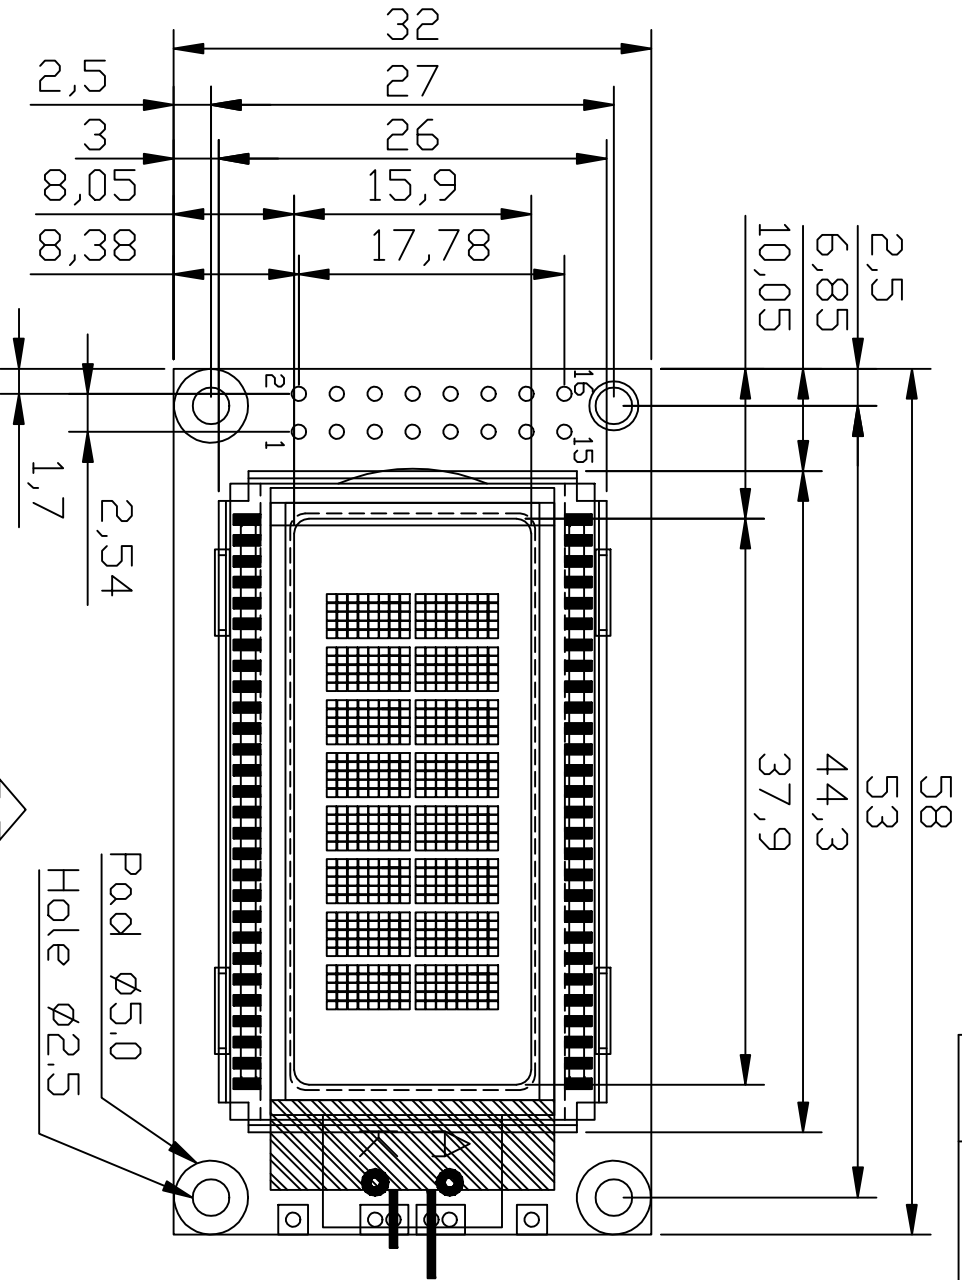

REV	DESCRIPTION:	DATE
A00	First issue	Dec-20-2006

**SPECIFICATIONS**

STORAGE TEMP : -20°C TO +70°C  
 OPERATING TEMP : -10°C TO +60°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.0V  
 DISPLAY MODE : STN,blue,Transmissive,Negative,MODE  
 BACKLIGHT: White color

VIEWING DIRECTION →

Pad  $\phi 5.0$   
 Hole  $\phi 2.5$

**DESCRIPTION:** C/D 结构图

深圳市兴宇合电子有限公司

SCALE	1 OF 1	UNIT	mm
SHEET	1	DATE	
GENERAL TOL.	$\pm 0.2$	DATE	
APPROVALS		DATE	
APP		DATE	
CHEK		DATE	
DRWING	ZY/CHEN	DATE	Dec-20
MODEL NUMBER:	JDL6902A03-08W	PROJECTION	
PART NO.			

1 2 3 4 5 6