
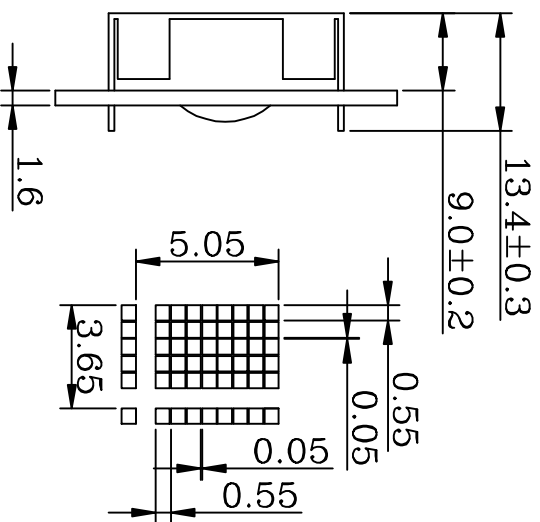


1		2		3		4		5		6		
PIN NO.	SYMBOL									REV	DESCRIPTION:	DATE
1	VSS									A00	First Issue	20090526

2	Vdd
3	Vo
4	RS
5	R/ $\bar{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

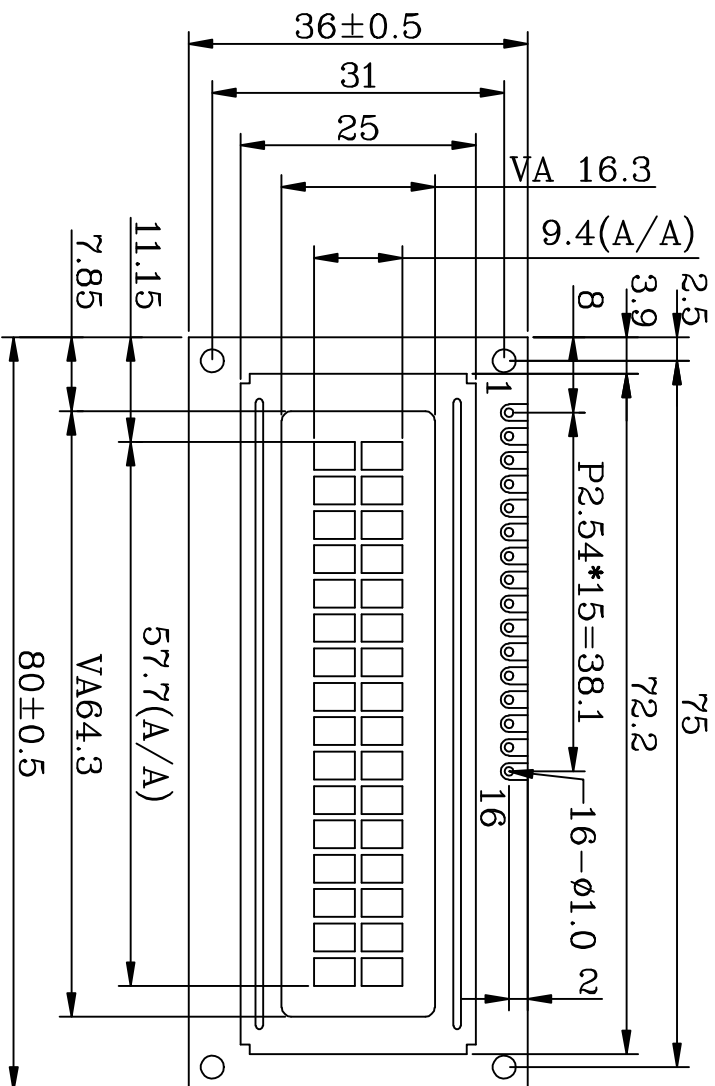

**SPECIFICATIONS**

STORAGE TEMP : -10°C TO +60°C  
 OPERATING TEMP : 0°C TO +50°C  
 VIEWING DIRECTION : 6 0°CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD= 4.5V  
 DISPLAY MODE : STN(Y/G) TRANSPARENT P MODE  
 BACK LIGHT ITEM: Y/G(BOTTOM) 5.0V  
 LCM OPERATING VOLTAGE:5.0V  
 CONTROLLER/DRIVER IC: ST7066

**C/D 外型图**

深圳市兴宇合电子有限公司

DESCRIPTION:		MODEL NUMBER:		PART NO:	
SCALE	FIG	JBC1602A00-02Y			
SHEET 1 OF 1	UNIT				
GENERAL TOL.	mm				
± 0.2mm					
APPROVALS	DATE				
APP					
CHEK					
DRWN: DAP	200905	DO NOT SCALE THIS DRAWING. PROJECTION			