


请客户确认回签

REV	DESCRIPTION:	DATE
00	FIRSTISSUE	2008/08/18

PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

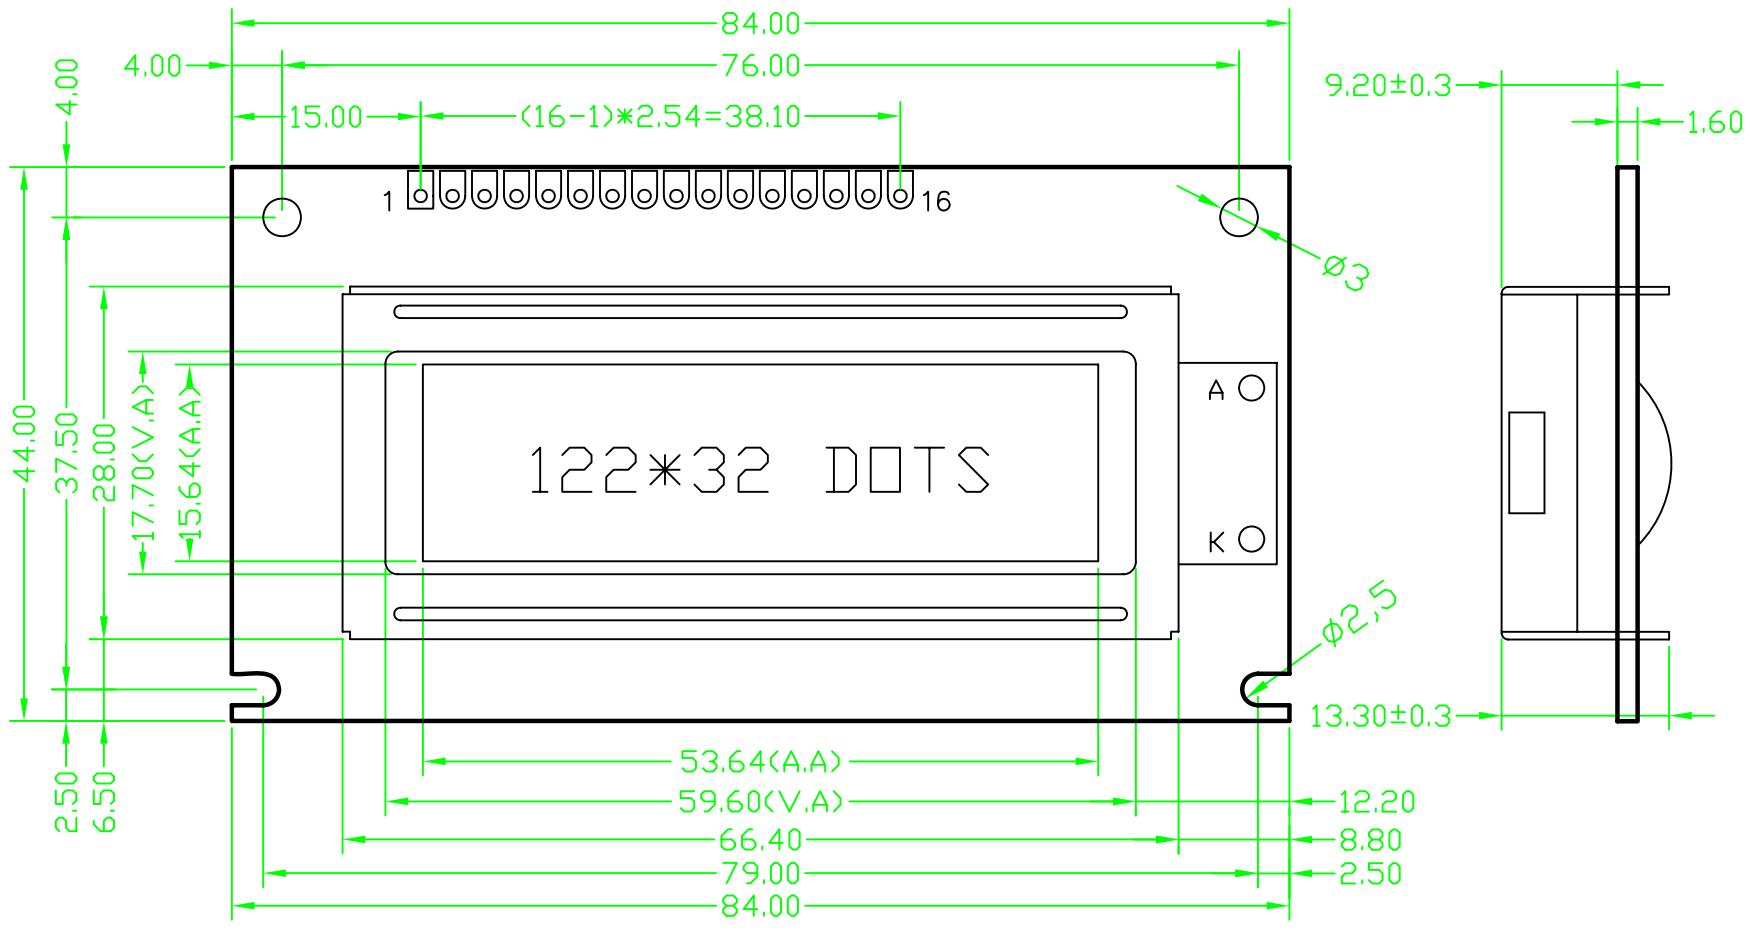

SPECIFICATIONS

OPERATING TEMP : -20°C TO +70°C  
 STORAGE TEMP : -30°C TO +80°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/32 DUTY, 1/5 BIAS, VLCD=4.7V VDD:5V  
 DISPLAY MODE : STN,Y/G,Transflective/POSITIVE,MODE  
 BACKLIGHT: YELLOW GREEN

DESCRIPTION:		外型图	
SCALE:	FIT	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	UNIT	MODEL NUMBER :	PART NO:
± 0.50mm	mm		
APPROVALS	DATE	JBG12232A11-02Y-B53	PROJECTION
APP:			
CHK:		DO NOT SCALE THIS DRAWING.	
DWN: plp	20100302		