


请客户签字回传:

PIN	NAME
1	VSS
2	VDD
3	V0
4	A0
5	E1
6	E2
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K
17	WR

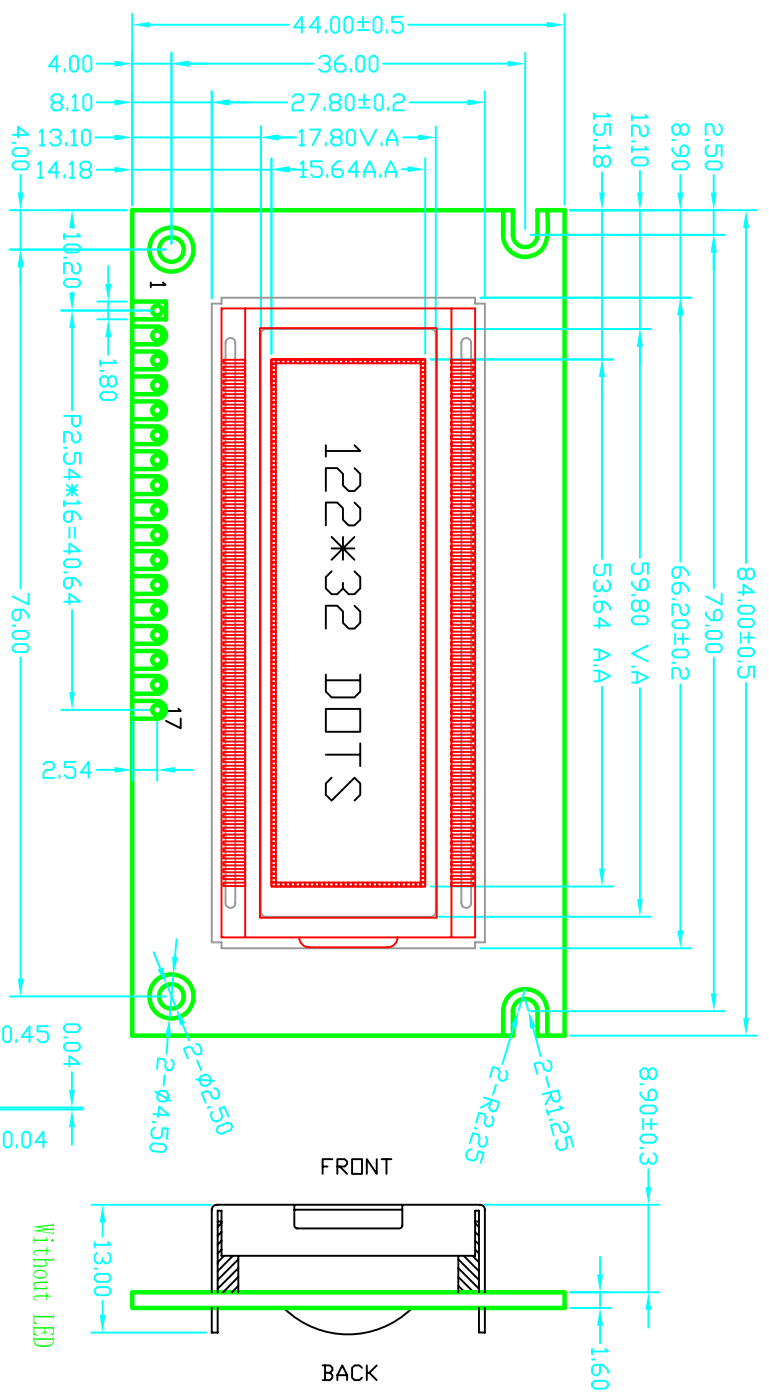

SPECIFICATIONS:

1. DRIVE METHOD: 1/32DUTY, 1/5BIAS, VDD=5.0V.
 2. VIEWING ANGLE: 6 0'CLOCK.
 3. DISPLAY TYPE: STN/Y-G, REFLECTIVE/POSITIVE.
 4. OPERATING TEMP: 0 TO 50°C.
 5. STORAGE TEMP: -20 TO 70°C.
 6. CONNECTION: ZEBBER
- IC: PT6520 OR EQU.

版本	更改内容:	设计日期:
00	在JBG12232A13-08W的基础上修改黄绿反射不带背光	2010.12.28



深圳市兴宇合电子有限公司

LCM工程图

SCALE: 1:1	UNIT: mm	MODEL NUMBER: JBG12232A13-26V	CUSTOMER: 客户型号:
页数: 1 OF 1	允许公差: 0.3mm	DO NOT SCALE THESE DRAWINGS.	PROJECTION: 客户型号:
比例: 1:1	单位: mm	设计人: LTVQ	日期: 2010.12.28
审核: 日期:	日期:		