
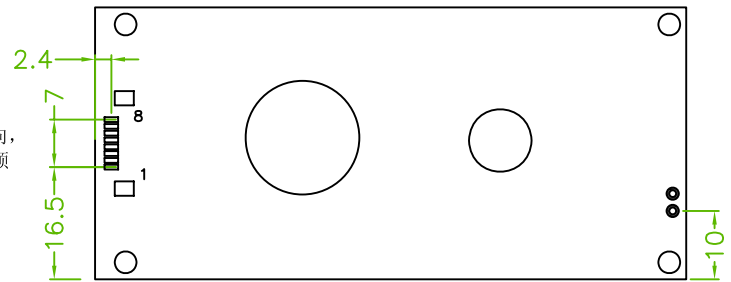
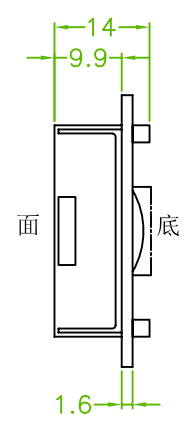


PIN NO.	SYMBOL
1	Vss
2	Vss
3	VDD
4	CS
5	SID
6	SCLK
7	LED_A
8	LED_A

REV	DESCRIPTION:	DATE
00	First issue	20110118

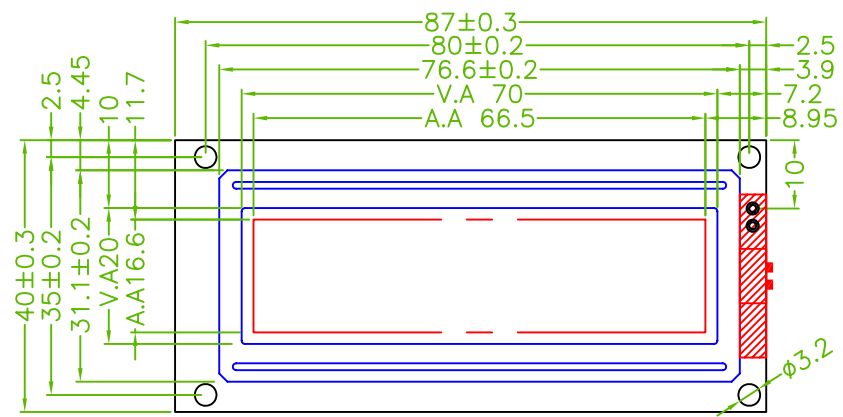

请注意此连接器，换了方向，下接触 并没有更改出PIN顺序!!!

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/6 BIAS, VLCD= 5.0V
 DISPLAY MODE: STN[BLUE] TRANSMISSIVE NEGATIVE MODE
 BACK LIGHT ITEM: White(side)3.2V nc resistor
 LCM OPERATING VOLTAGE: 5.0V

DESCRIPTION:		C/D 外型图	
SCALE:	FIT	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	UNIT	mm
APPROVALS	DATE	MODEL NUMBER :	PART NO:
APP:		JBG12832E01-08W-B50-1	
CHK:		PROJECTION	
DWN: PLP	20110118	DO NOT SCALE THIS DRAWING.	