
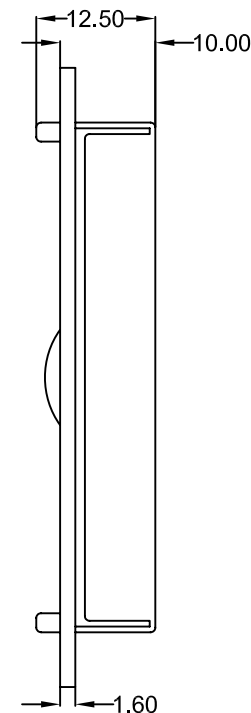


PIN	NAME
1	GND
2	VDD
3	VEE
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS1
16	/CS2
17	RESET
18	VOUT
19	LED_A
20	LED_K

REV	DESCRIPTION:	DATE
A00	First issue	DEC-26-2006

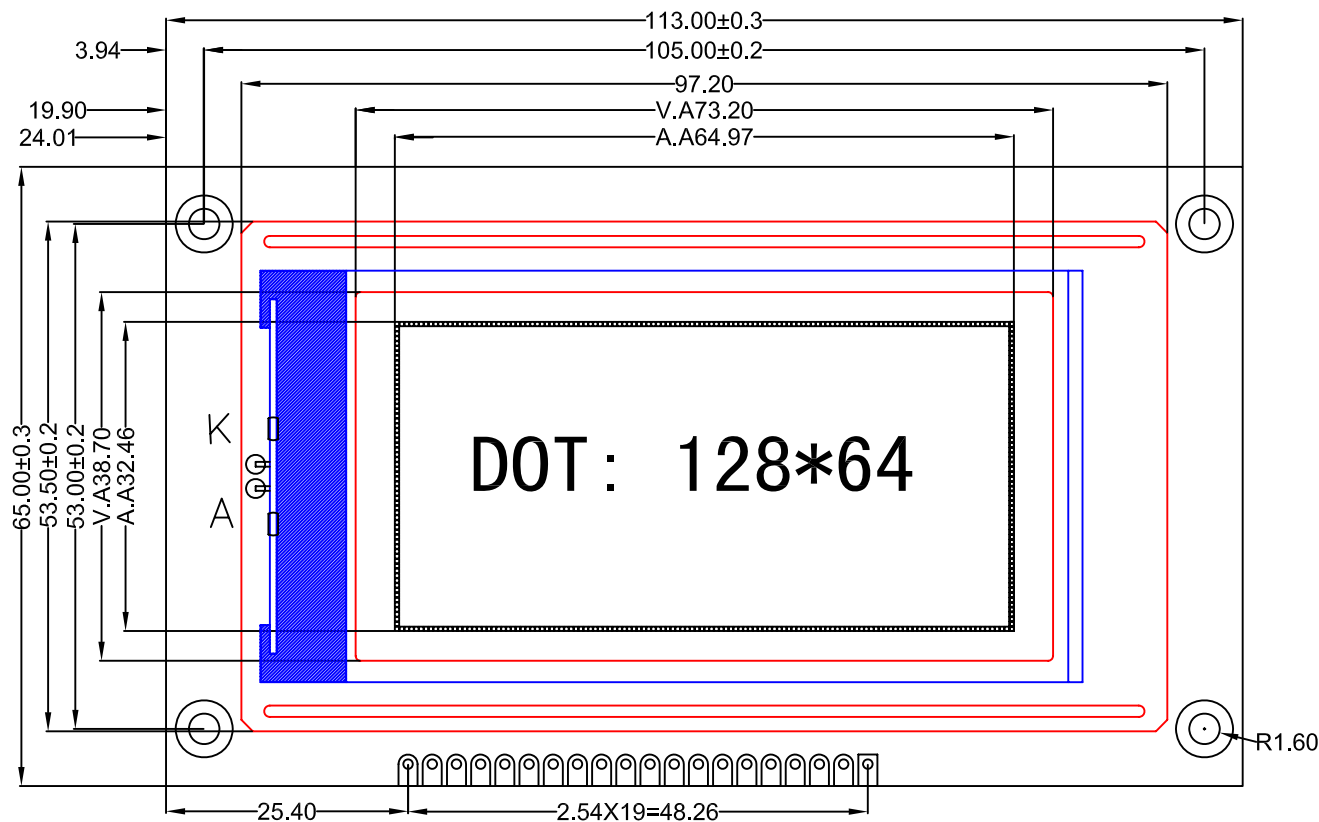

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VLCD=13.0V
 DISPLAY MODE : STN(BLUE) TRANSMISSIVE NAGETIVE MODE
 BACK LIGHT ITEM: WHITE;5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC:SNB6400

DESCRIPTION:		C/D 外型图	
SCALE:	FIT	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	MODEL NUMBER : JBG12864A00-08W-3	PART NO:
APPROVALS	DATE		
APP:			
CHK:			
DWN: ZQS	2009/09/01	DO NOT SCALE THIS DRAWING.	PROJECTION