

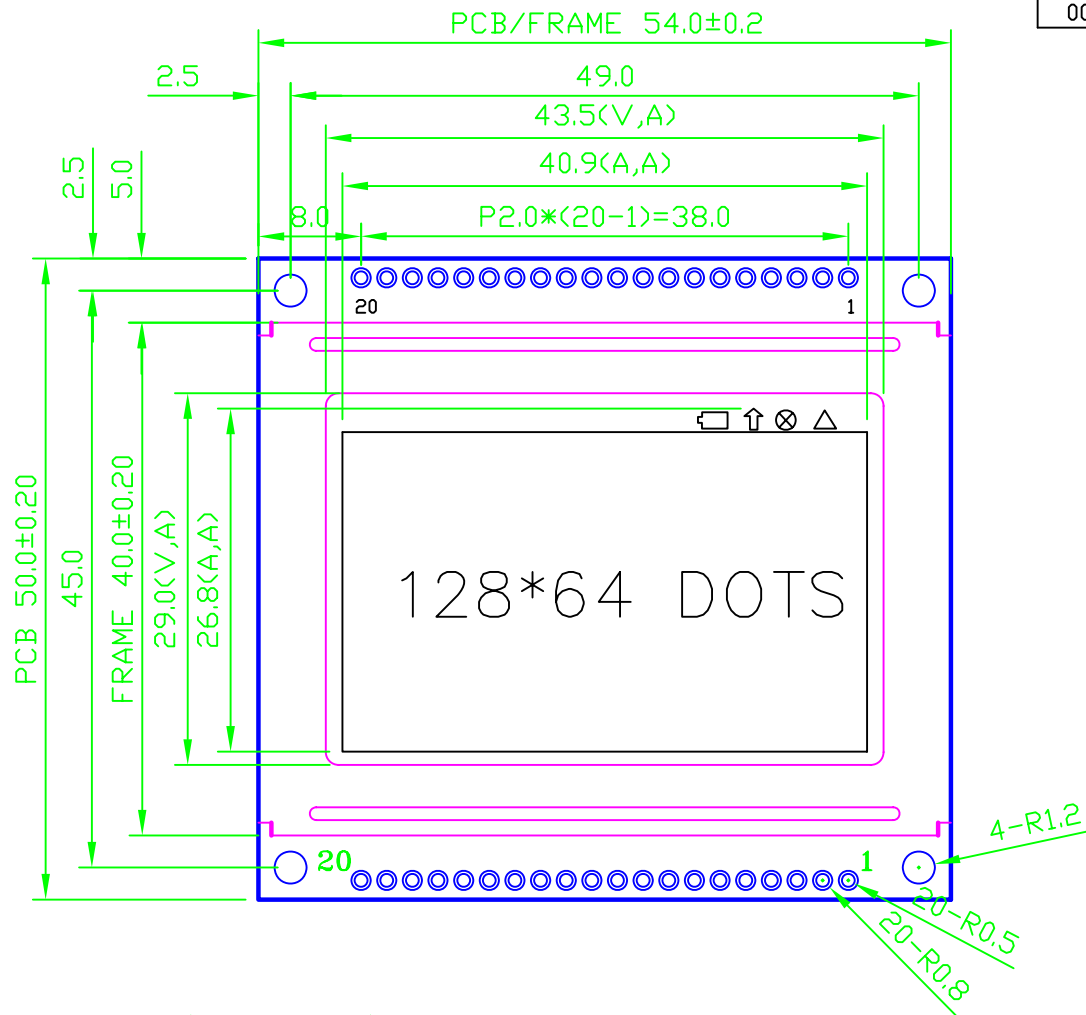


PIN NO	SYMBOL
1	VSS
2	VDD
3	V _O
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RST
18	VEE
19	A<EL>
20	K

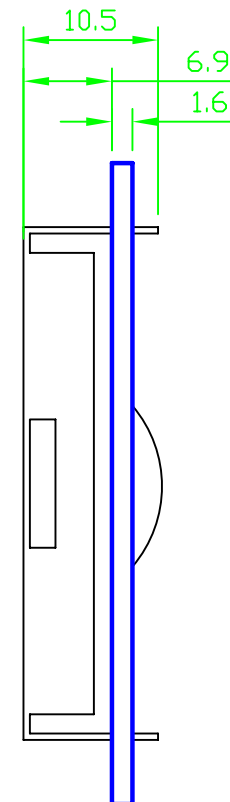

REV	DESCRIPTION:	DATE
00	First issue	Feb-27-2007



NOTES:

1. DRIVE METHOD: 1/64DUTY, 1/9BIAS,VOP13.0V,VDD5.0V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN(Y/G), TRANSFLECTIVE/POSITIVE.
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION:COB.
7. BACK LIGHT:WHITE,VDD 4.2V
8. IC:S6B0107,S6B0108..
9. NOT DIMENSION TOLERANCES IS ±0.2.

DESCRIPTION:		C/D 结构图		
SCALE: FIT		深圳市兴宇合电子有限公司		
SHEET: 1 OF 1				
GENERAL TOL: ± 0.20mm	UNIT mm			
APPROVALS	DATE	MODEL NUMBER : JBG12864D00-00F		PART NO:
APP:				
CHK:				
DWN: 常东	Feb-27-2007			
DO NOT SCALE THIS DRAWING.		PROJECTION		