


请客户确认回签

REV	DESCRIPTION:	DATE
00	FIRSTISSUE	2011/07/29
01	更改pcb以及定位孔	2011/08/19

PIN	NAME
1	VDD
2	VSS
3	V0
4	/RET
5	E1
6	E2
7	R/W
8	RS
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7

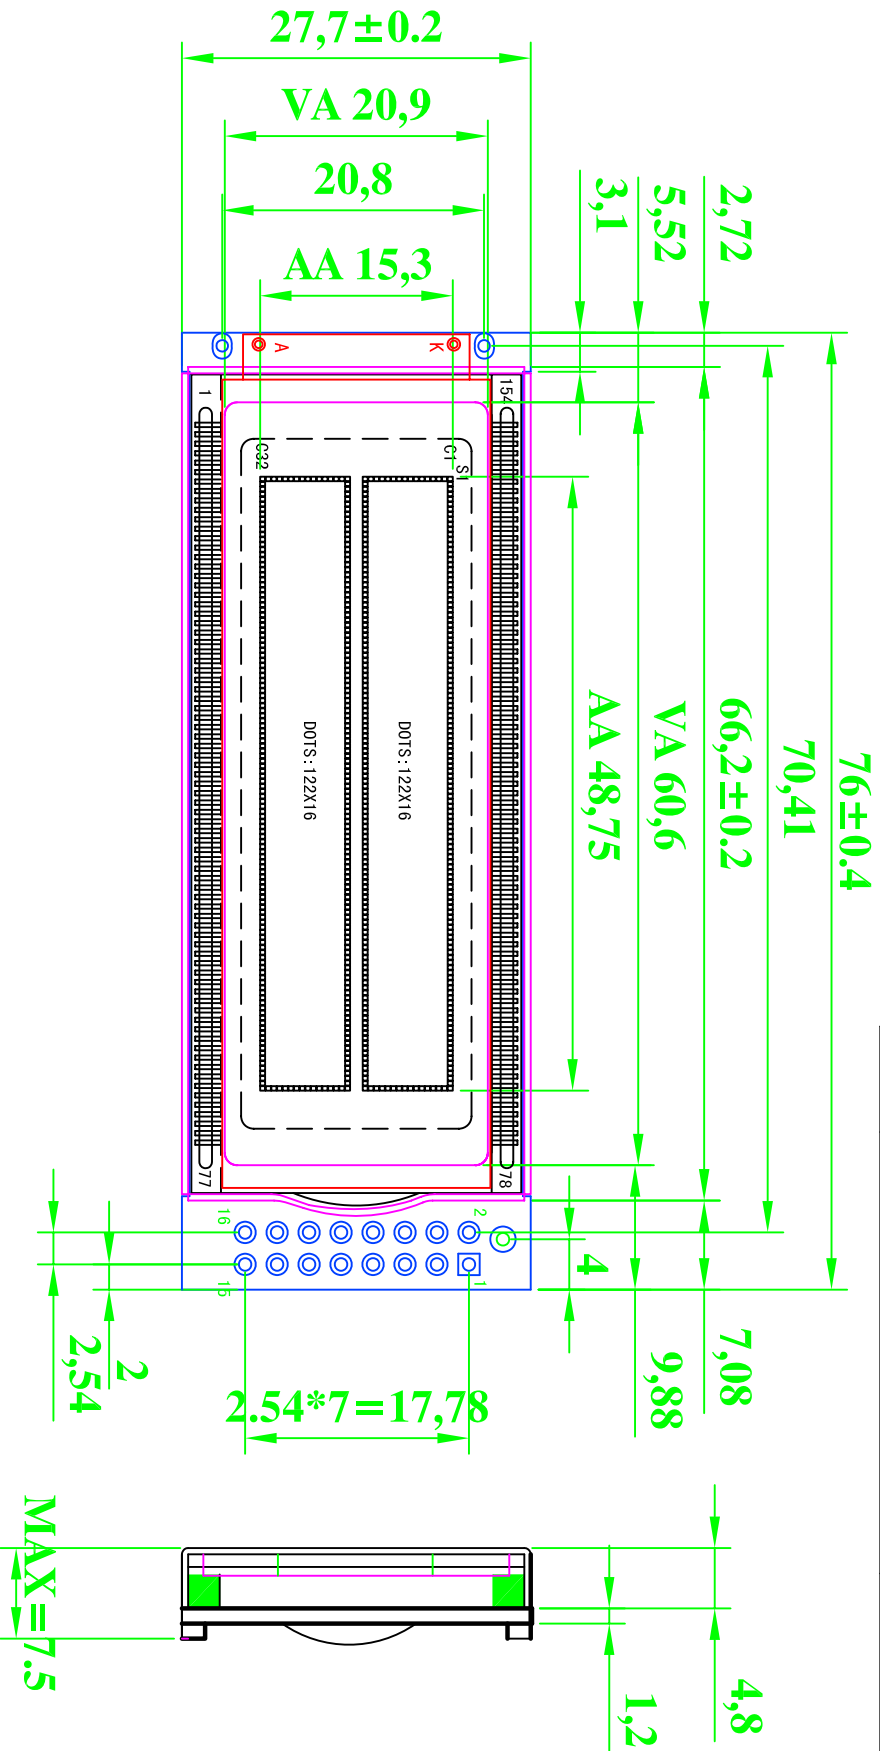

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/5 BIAS, VLCD=4.5V VDD=5V
 DISPLAY MODE : STN,Y/G,Transflective/POSITIVE,MODE
 BACKLIGHT: YELLOW GREEN
 DRIVER IC: SED1520 2PCS

外型图

深圳市兴宇合电子有限公司

DESCRIPTION:		SCALE: 1:1	
SHEET: 1 OF 1		GENERAL TOL: ± 0.50mm	
APPROVALS	DATE	MODEL NUMBER:	PROJECTION
APP:		JBG12232B00-00Y	
CHK:			
DWVN: ZQS	2011.08.19	DO NOT SCALE THIS DRAWING.	

PART NO: