请客户确认回签：

PIN	NAME
1	GND
2	VDD 5V
3	CS
4	SDI
5	SCLK
6	RST
7	A
8	LEDK
9	LED 1A
10	LED 2A

REV	DESCRIPTION:	DATE
00		20110107

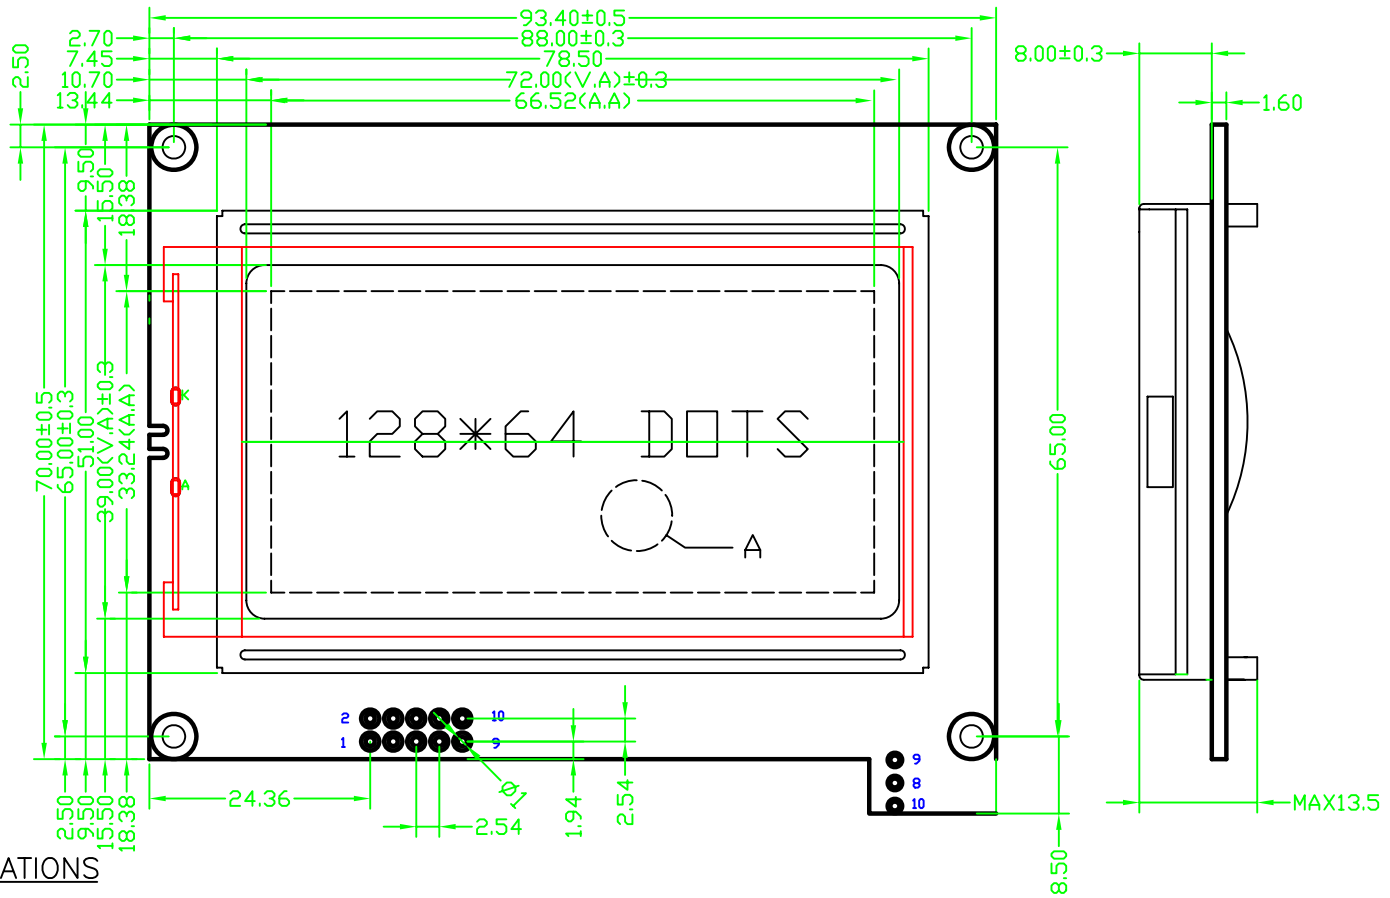



SPECIFICATIONS

STORAGE TEMP : −20°C TO +70°C
OPERATING TEMP : −30°C TO +80°C
VIEWING DIRECTION : 12 O'CLOCK
DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VDD=5.0V
DISPLAY MODE : STN(Y/G) TRANSFLECTIVE POSITIVE MODE
BACK LIGHT ITEM: Y/G (SIDE) 3PCS;3.0V
LCM OPERATING VOLTAGE:5.0V
CONTROLLER/DRIVER IC: ST7920 ST7921
CONNECT MODE:串口

DESCRIPTION:	外型图		
SCALE: FIT	深圳市兴宇合电子有限公司		
SHEET: 1 OF 1			
GENERAL TOL: ± 0.50mm	UNIT mm		
APPROVALS	DATE	MODEL NUMBER : JBG12864G00-01F	PART NO:
APP:			
CHK:			
DWN: plp	20110107	DO NOT SCALE THIS DRAWING.	PROJECTION