REV	DESCRIPTION:	DATE
00	FIRSTISSUN	2010.07.07

PIN	MANE
1	GND
2	VDD
3	V0
4	RS/CS
5	RW/SID
6	E/SCLK
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	FSB
16	NC
17	/REST
18	VEE
19	A
20	K

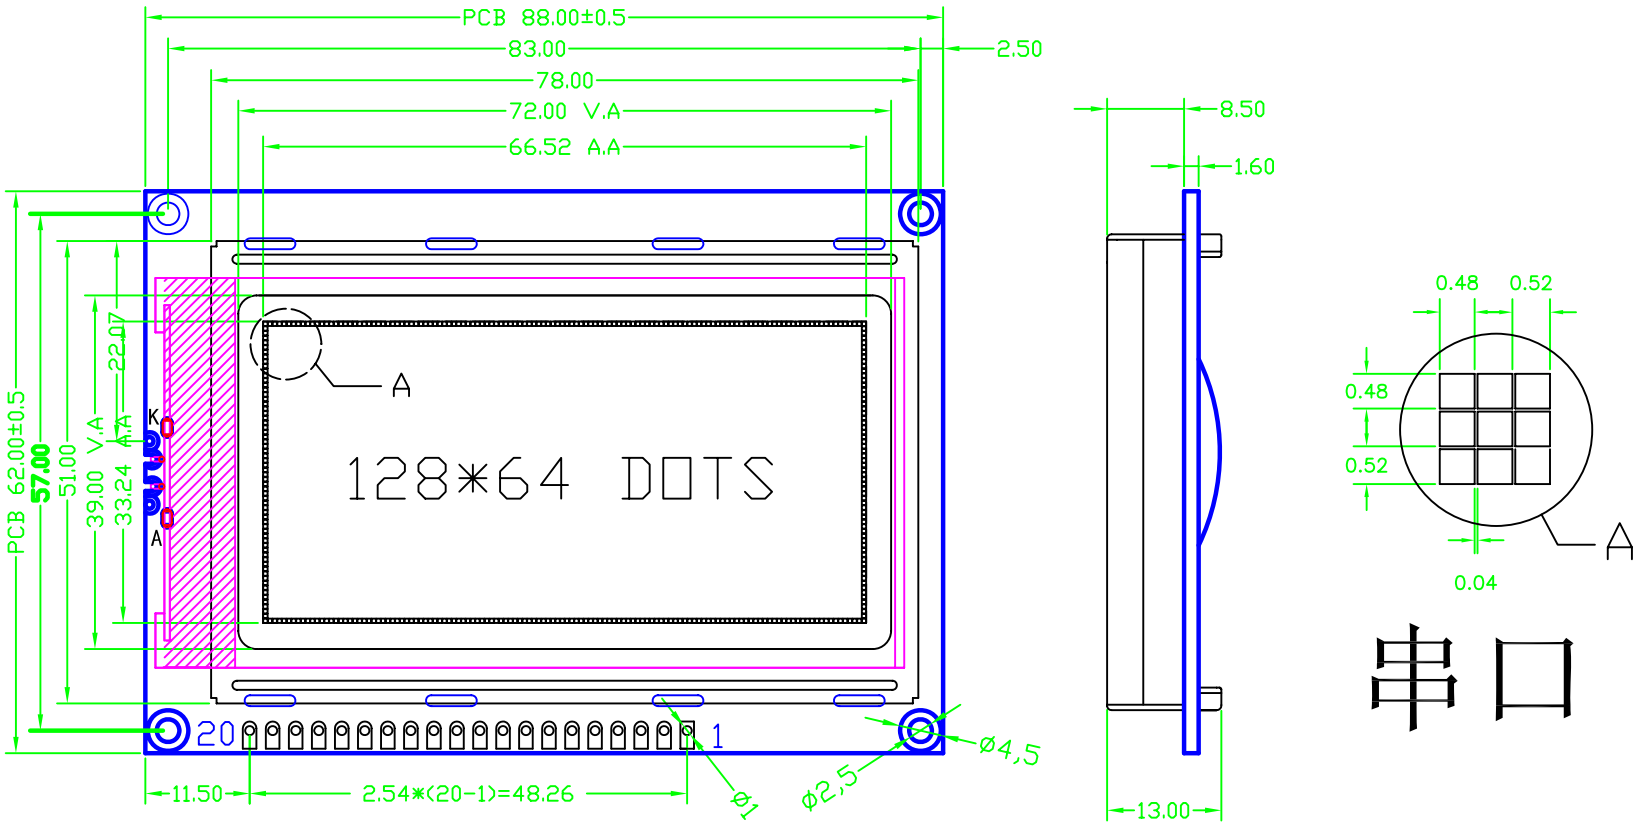

串口

SPECIFICATIONS

DISPLAY MODE: FSTN TRANSFLECTIVE POSITIVE
DRIVE CONDITION: 1/64 DUTY 1/9 BIAS, VDD=5.0V
VIEWING DIRECTION: 6 O'CLOCK
OPERATING TEMP: -20° C TO 70° C
STORAGE TEMP: -30° C TO 80° C
DRIVER IC : ST7920
BACKLIGHT: WHITE 3PCS

DESCRIPTION: 外型图			
SCALE: FIT	深圳市兴宇合电子有限公司		
SHEET: 1 OF 1			
GENERAL TOL: ± 0.50mm	UNIT mm		
APPROVALS	DATE	MODEL NUMBER : JBG12864G02-41W	PART NO: JDL12864G02
APP:			
CHK:			
DWN: ZQS		DO NOT SCALE THIS DRAWING.	PROJECTION