

请客户确认回签:

版本



00

更改内容:

更改日期:

编号:

PIN	NAME
1	GND
2	VDD
3	V0
4	RS/CS
5	RW/SID
6	E/SCLK
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	NC
17	/RST
18	VOUT
19	BL-A
20	BL-K

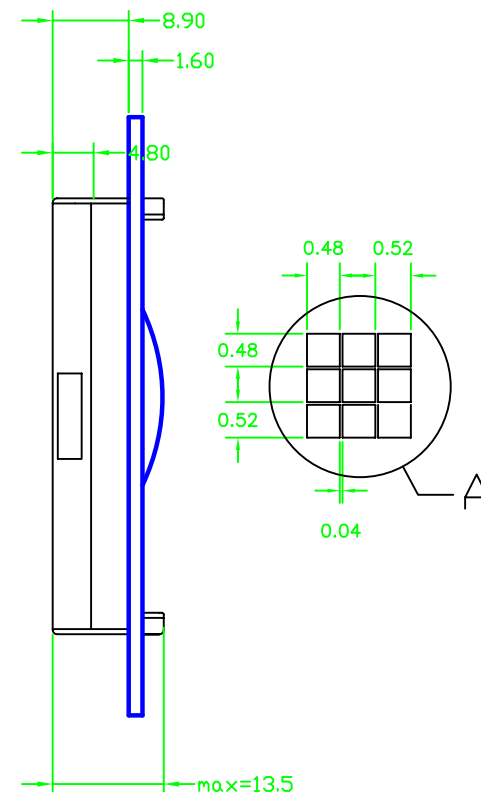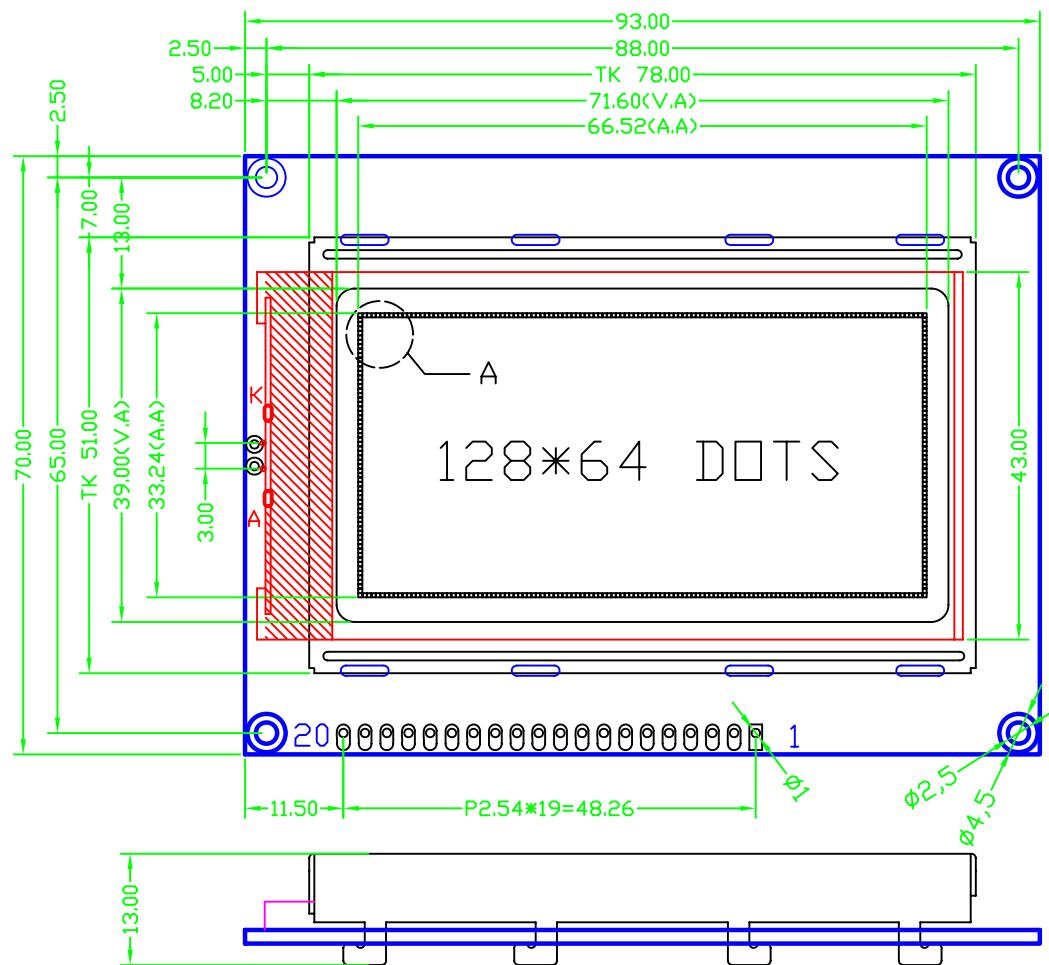

NOTES:

1. DRIVE METHOD: 1/32DUTY, 1/6BIAS, VDD: 5.0V
2. VIEWING ANGLE: 6 0' CLOCK.
3. DISPLAY TYPE: STN, BLUE TRANSMISSIVE/NEGATIVE.
4. OPERATING TEMP: -20° C TO 70° C.
5. STORAGE TEMP: -30° C TO 80° C.
6. CONNECTION IC: ST7920 AND ST7921
7. BACKLIGHT: WHITE 3PCS



深圳市兴宇合电子有限公司

SCALE:	FIT
页数:	1 OF 4
允许公差:	mm
比例:	单位: mm
审核:	日期:
初审:	日期:
设计: LHN	日期: 2010.06.28

LCM 结构图

MODEL NUMBER :

JBG12864G04-08W



客户型号:

DO NOT SCALE THIS DRAWING.

PROJECTION