


请客户确认回传:

| PIN | NAME   |
|-----|--------|
| 1   | GND    |
| 2   | VDD    |
| 3   | V0     |
| 4   | RS/CS  |
| 5   | RW/SID |
| 6   | E/SCLK |
| 7   | DB0    |
| 8   | DB1    |
| 9   | DB2    |
| 10  | DB3    |
| 11  | DB4    |
| 12  | DB5    |
| 13  | DB6    |
| 14  | DB7    |
| 15  | FSB    |
| 16  | NC     |
| 17  | RST    |
| 18  | VEE    |
| 19  | ASV    |
| 20  | K      |

| REV | DESCRIPTION: | DATE     |
|-----|--------------|----------|
| 00  |              | 20100524 |
| 01  | 效果可调, 电压为5V  | 20100525 |

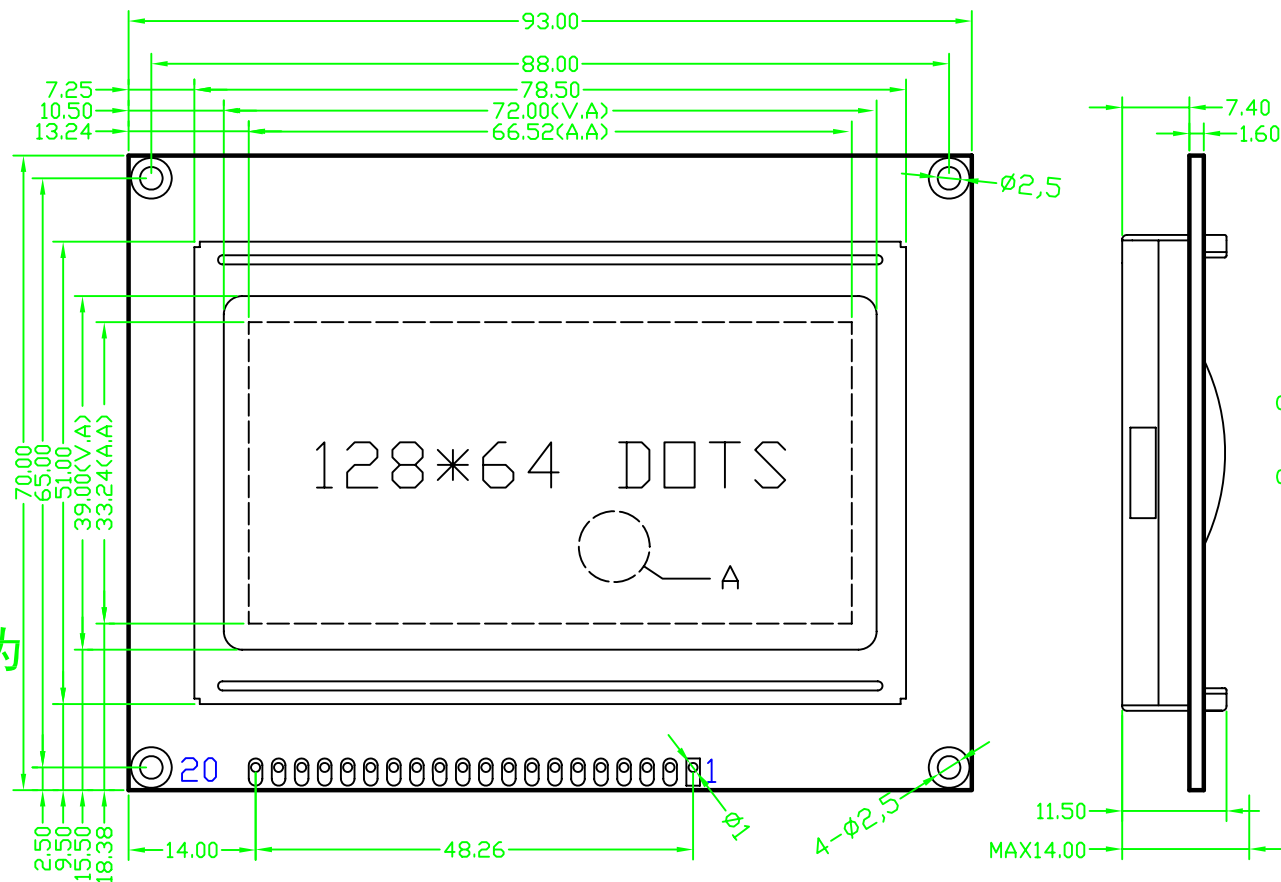

注意:  
客户要求电压修改为  
5.0V

#### SPECIFICATIONS

STORAGE TEMP : -20°C TO +70°C  
OPERATING TEMP : -30°C TO +80°C  
VIEWING DIRECTION : 6 O'CLOCK  
DRIVE CONDITION : 1/32 DUTY, 1/6 BIAS,  
DISPLAY MODE : STN(BLUE) TRANSMISSIVE NEGATIVE MODE  
BACK LIGHT ITEM: WHITE 5.0V  
LCM OPERATING VOLTAGE:5.0V  
CONTROLLER/DRIVER IC: ST7920 ST7921

| DESCRIPTION:             |            |                                      |            |
|--------------------------|------------|--------------------------------------|------------|
| SCALE: FIT               |            | 外型图                                  |            |
| SHEET: 1 OF 1            |            | 深圳市兴宇合电子有限公司                         |            |
| GENERAL TOL:<br>± 0.30mm | UNIT<br>mm | MODEL NUMBER:<br>JBG12864G04-08W-A31 | PART NO:   |
| APPROVALS                | DATE       |                                      |            |
| APP:                     |            |                                      |            |
| CHK:                     |            |                                      |            |
| DWN: 潘利平                 |            | DO NOT SCALE THIS DRAWING.           | PROJECTION |