


PIN	NAME
1	GND
2	VDD
3	V _O
4	RS/CS
5	RW/SD
6	E/SCLK
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	NC
17	/RST
18	VOUT
19	BL-A
20	BL-K


版本	更改内容:	更改日期:	编号:
00		2011021800	



1. DRIVE METHOD: 1/32DUTY, 1/6BIAS, VDD: 5.0V
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: STN,GRAY, TRANSFLECTIVE/POSITIVE.
4. OPERATING TEMP: -20° C TO 70° C.
5. STORAGE TEMP: -30° C TO 80° C.
6. CONNECTION IC: ST7920 , ST7921*2
7. BACKLIGHT: WHITE 3PCS

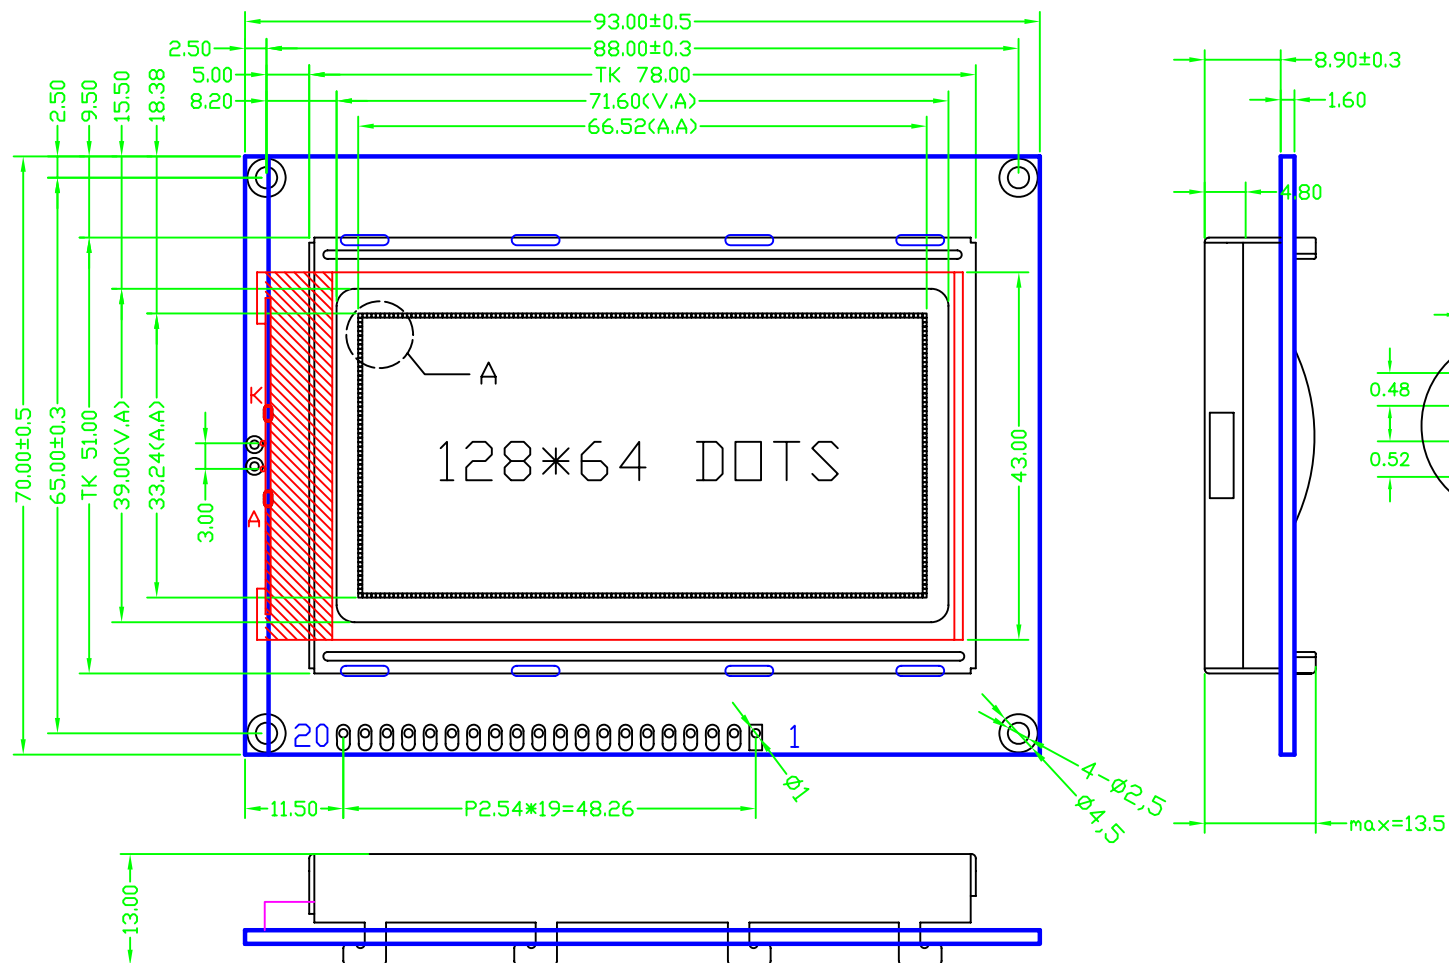

深圳市兴宇合电子有限公司

SCALE: FIT		LCM 结构图		
页数: 1 OF 4				
允许公差: mm				
比例:	单位: mm	MODEL NUMBER : JBG12864G04-20W		客户型号:
审核:	日期:			
初审:	日期:			
设计: PLP	日期: 2011.02.18			
		DO NOT SCALE THIS DRAWING.	PROJECTION	