



版本	更改内容:	更改日期:	编号:
00			

PIN	NAME
1	GND
2	VDD
3	V0
4	RS/CS
5	RW/SID
6	E/SCLK
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	NC
17	/RST
18	NC
19	BL-A
20	BL-K

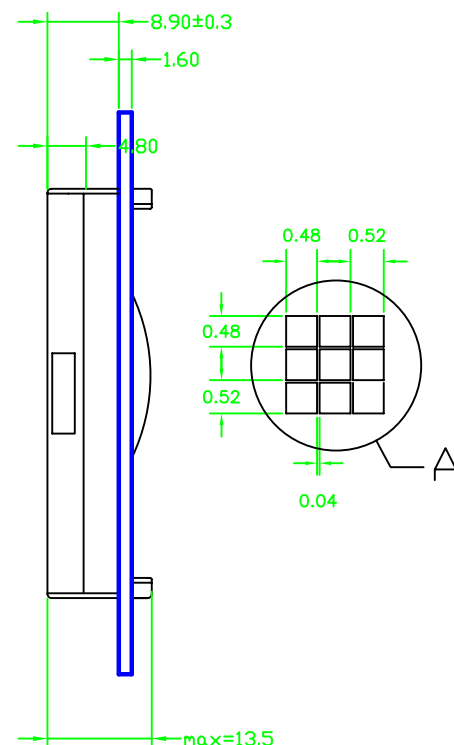

1. DRIVE METHOD: 1/32DUTY, 1/6BIAS, VDD: 5.0V
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: STN,BLUE TRANSMISSIVE/NEGATIVE.
4. OPERATING TEMP: -20° C TO 70° C.
5. STORAGE TEMP: -30° C TO 80° C.
6. CONNECTION IC: ST7920 & ST7921
7. BACKLIGHT: WHITE 3PCS 3020

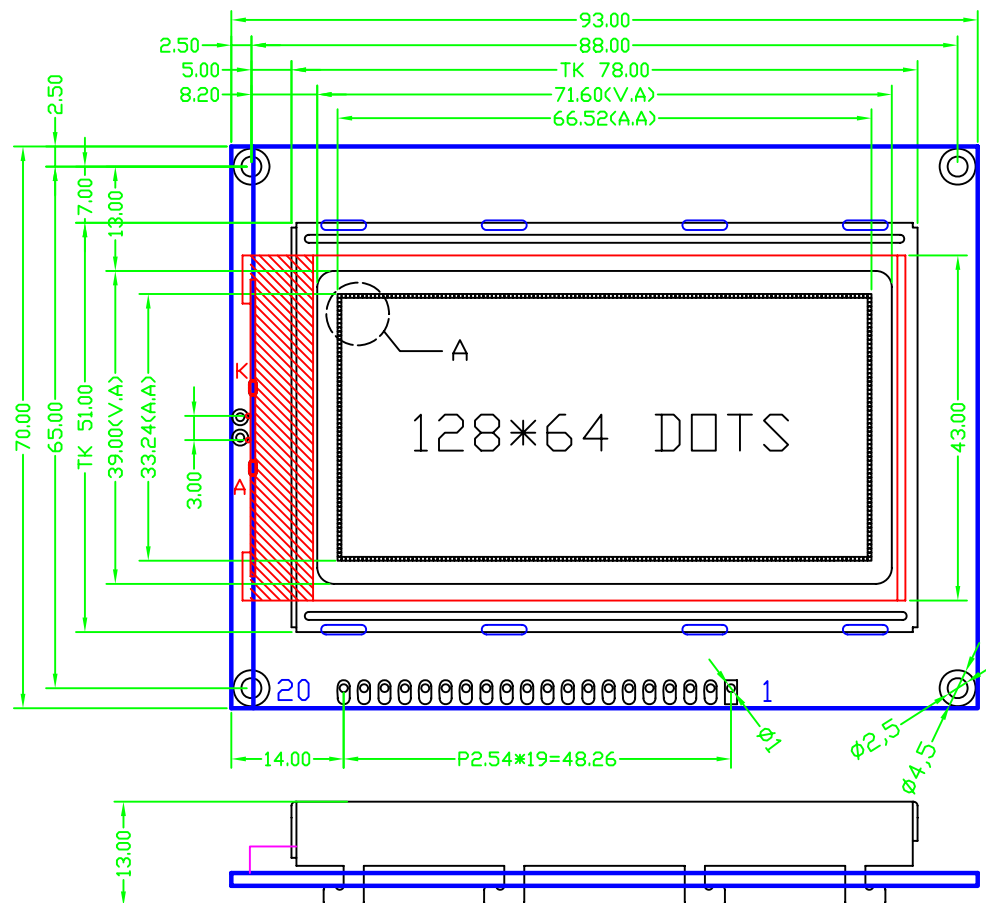

深圳市兴宇合电子有限公司

页数: 1 OF 4

允许公差:	mm
-------	----

比例:	单位: mm
-----	--------


审核:	日期:
-----	-----

初审:	日期:
设计: plp	日期:20110511

MODEL NUMBER :

JBG12864G06-08W

DO NOT SCALE THIS DRAWING.



客户型号:

LCM 结构图

A

E

10

IT