


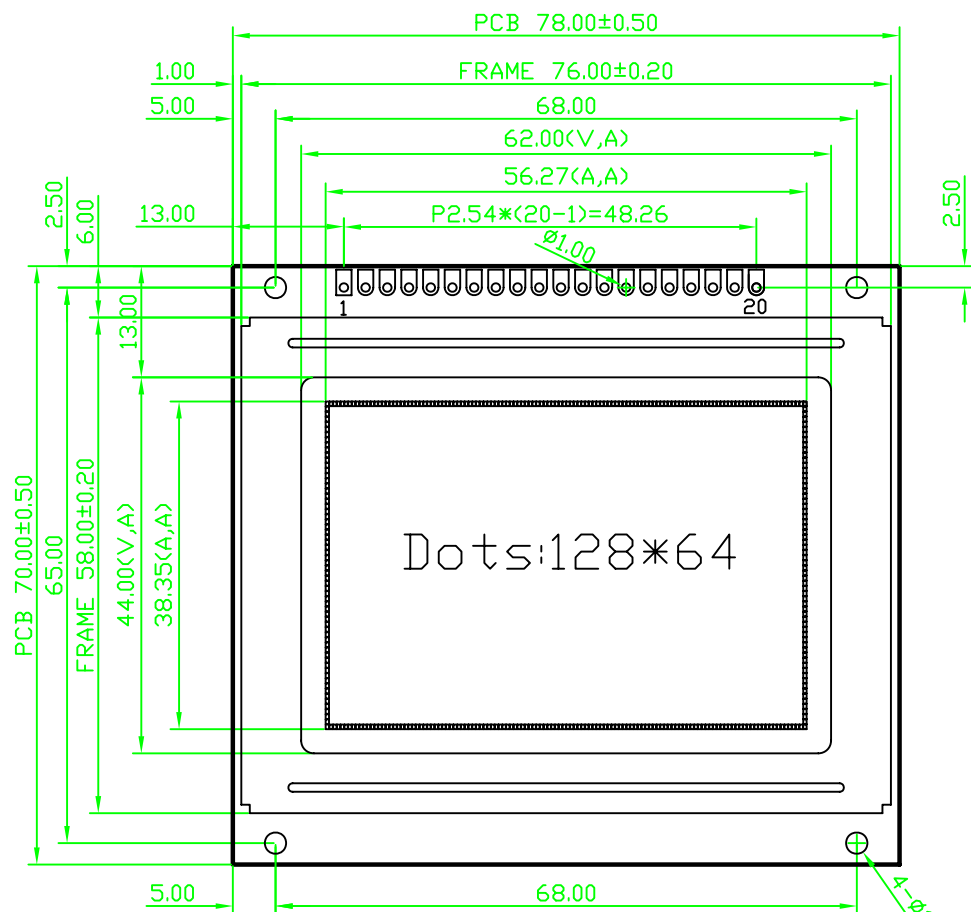


NOTES:

1. DRIVE METHOD: 1/32DUTY, 1/6BIAS,VOP5.0V,VDD3.0V
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN(Y-G), TRANSFLECTIVE/POSITIVE,
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION:COB.
7. BACK LIGHT: YELLOW-GREEN (CHIP 2X44=88 dies) ,VBL=5.0V
8. IC:ST7920-0B/ST7921.
9. NOT DIMENSION TOLERANCES IS ± 0.3 .

请注意：背光用
5.0V供电。

REV	DESCRIPTION:	DATE
00	在12864H00-00F-A31基础上改将背光改为底背光。	2011.11.07
01	增加20PIN插座	2011.11.10

PIN NO.	SYMBOL
1	VSS
2	VDD
3	V0
4	RS(CS)
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	NC
17	RES
18	Vout
19	A
20	K

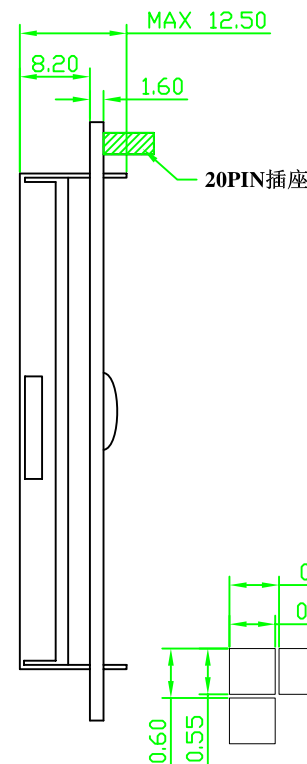

深圳市兴宇合电子有限公司

SCALE: FIT	LCM工程图	
页数: 1 OF 1		
允许公差: 0.3mm		
比例: 1:1	单位: mm	MODEL NUMBER: JBG12864H00-00Y-A31
审核: 日期:	日期:	客户型号:
初审: 日期:	日期:	
设计人: LAO	日期: 2011.11.10	DO NOT SCALE THIS DRAWING. PROJECTION