


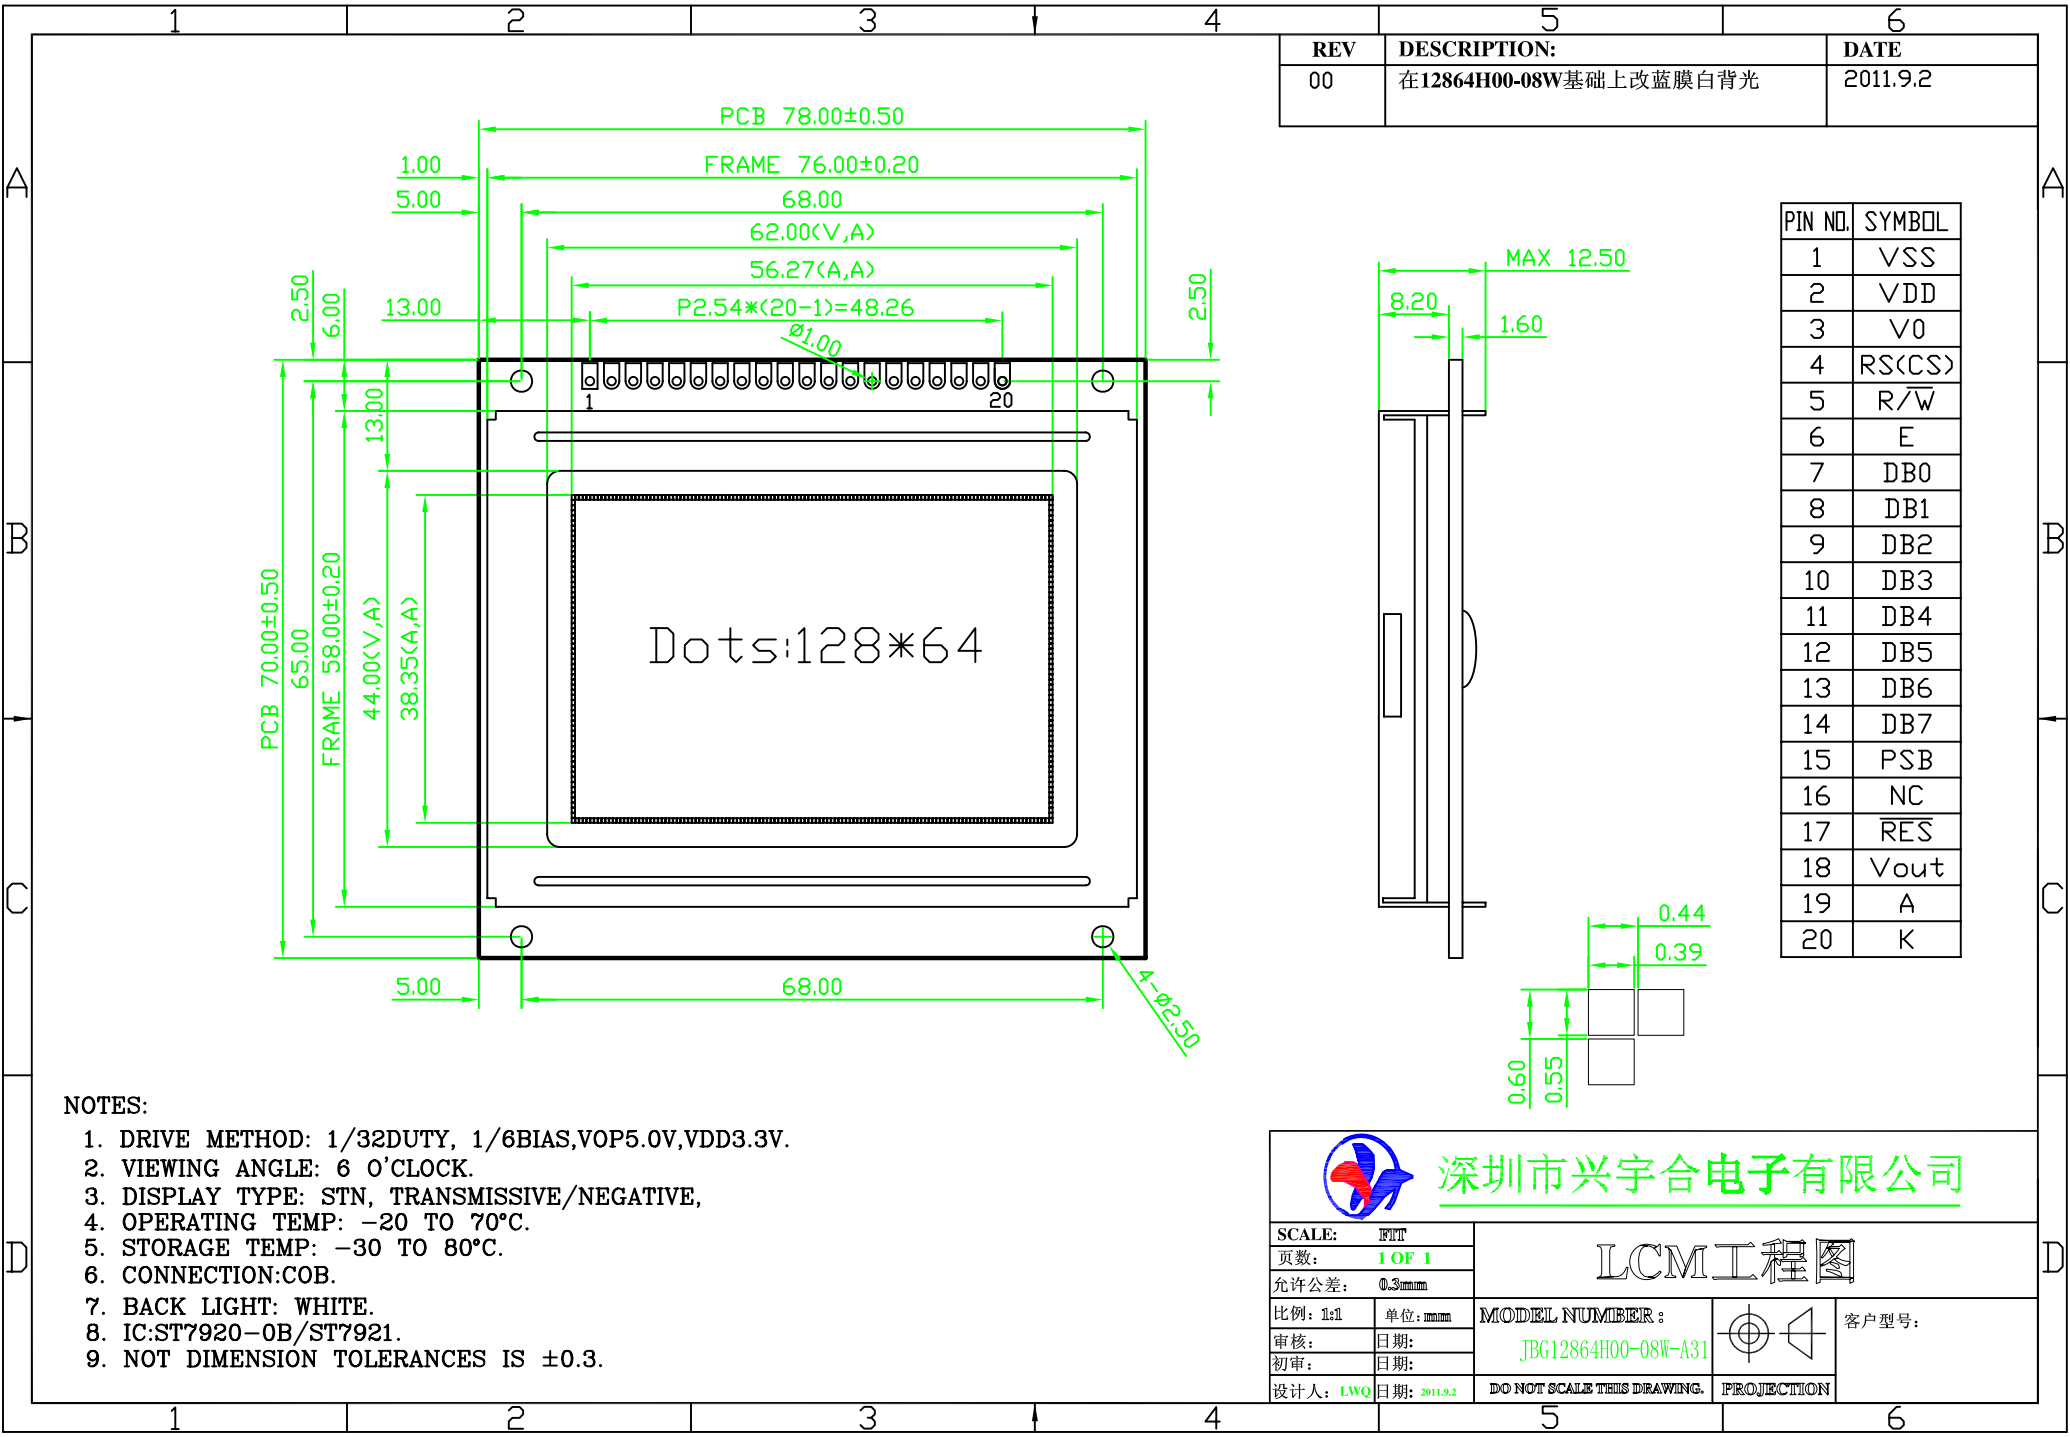

- NOTES:
- 1. DRIVE METHOD: 1/32DUTY, 1/6BIAS,VOP5.0V,VDD3.3V.
 - 2. VIEWING ANGLE: 6 O'CLOCK.
 - 3. DISPLAY TYPE: STN, TRANSMISSIVE/NEGATIVE,
 - 4. OPERATING TEMP: -20 TO 70°C.
 - 5. STORAGE TEMP: -30 TO 80°C.
 - 6. CONNECTION:COB.
 - 7. BACK LIGHT: WHITE.
 - 8. IC:ST7920-0B/ST7921.
 - 9. NOT DIMENSION TOLERANCES IS ±0.3.

 深圳市兴宇合电子有限公司

SCALE: FIT		LCM工程图	
页数:	1 OF 1		
允许公差:	0.3mm	MODEL NUMBER : JBG12864H00-08W-A31	
比例: 1:1	单位: mm		
审核:	日期:	DO NOT SCALE THIS DRAWING.	客户型号:
初审:	日期:		
设计人: LWQ	日期: 2011.9.2	PROJECTION	