


PIN	NAME
1	VDD
2	GND
3	V0
4	DB0
5	DB1
6	DB2
7	DB3
8	DB4
9	DB5
10	DB6
11	DB7
12	CS1
13	CS2
14	/RST
15	R/W
16	RS
17	E
18	VEE
19	LED_A
20	LED_K

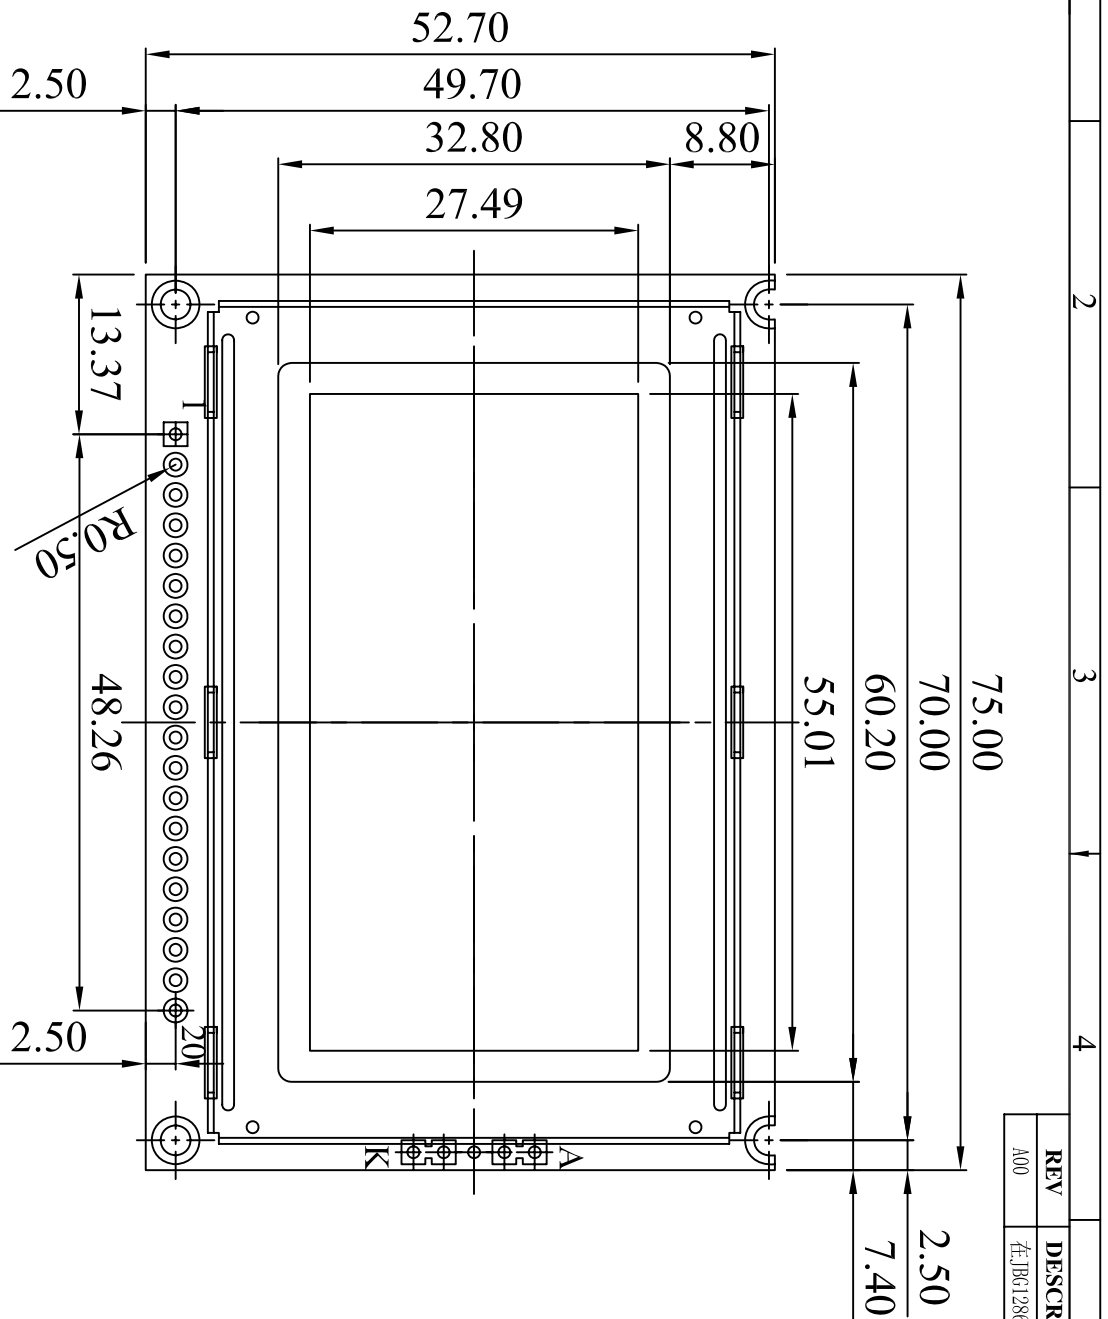

REV	DESCR
A00	在J361286

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VLCD= 9.0V
 DISPLAY MODE : STN(BLUE) TRANSMISSIVE N MODE
 BACK LIGHT ITEM: WHITE;5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: KS0107/KS0108

VIEWING DIRECTION

DESCRIPTION:

SCALE:	FTT
SHEET:	1 OF 1
GENERAL TOL:	UNIT
± 0.30mm	mm
APPROVALS	DATE
APP:	
CHK:	
DWN: ZY.CHEN	DEC-14-06

1 2 3 4