


PIN NO.	SYMBOL
1	VSS
2	VDD
3	Vo
4	D/I
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RES
18	Vout
19	A
20	K

REV	DESCRIPTION:	DATE
00	First issue	Mar-31-2007

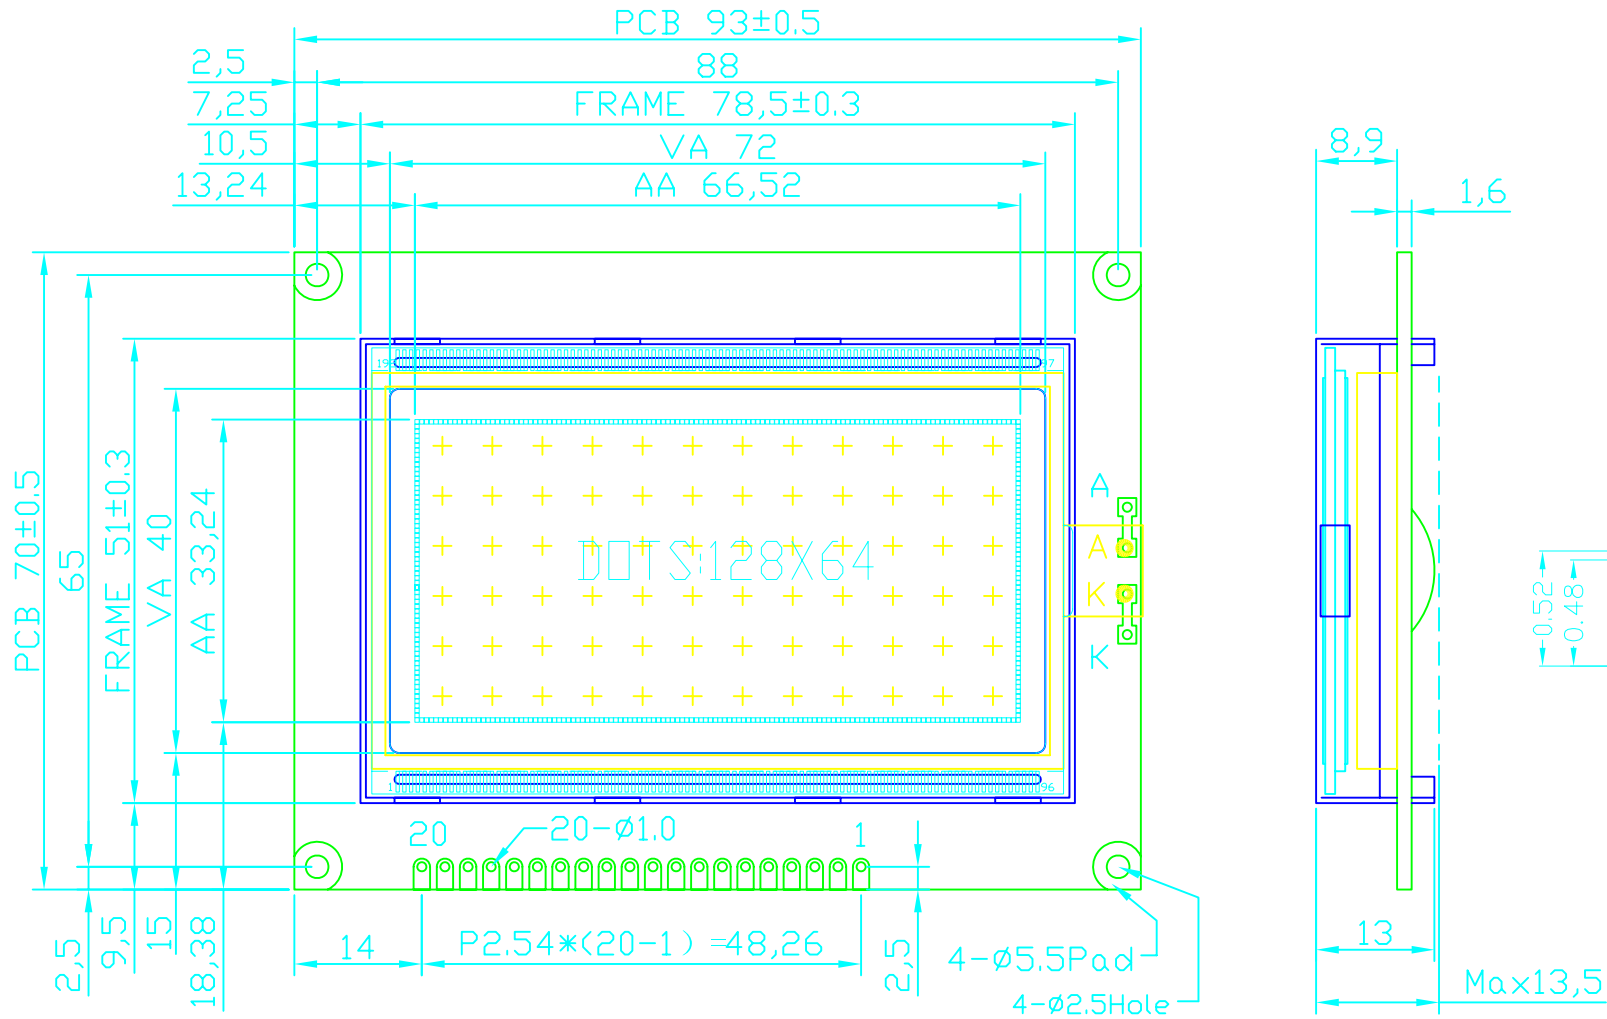

SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VLCD=9.1V VDD=5.0V
 DISPLAY MODE : STN,Y-G,Transflective,Positive,MODE
 BACKLIGHT: BOTTOW yellow-green color 4.2V
 DRIVER IC : SBN6400 EQU **

↑
VIEWING DIRECTION

DESCRIPTION:		C/D 结构图	
SCALE:	FIT	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	UNIT	MODEL NUMBER :	PART NO:
± 0.20mm	mm		
APPROVALS	DATE	JBG12864K01-00Y	
APP:			
CHK:		DO NOT SCALE THIS DRAWING.	PROJECTION
DWN: ZY.CHEN	Mar-31-2007		