
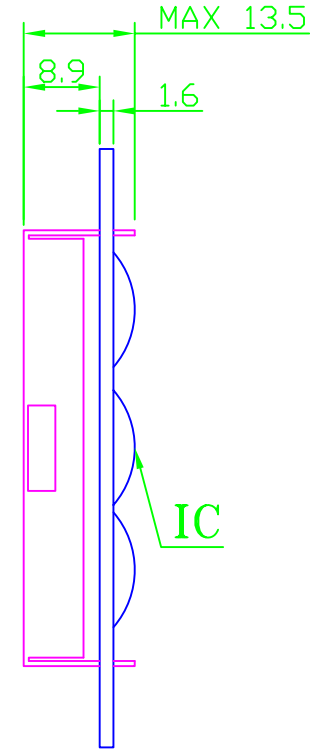



REV	DESCRIPTION:	DATE
00	First issue	Mar-31-2007
01	ADD 11.5 HIGH METAL FRAME	DEC-07-2007

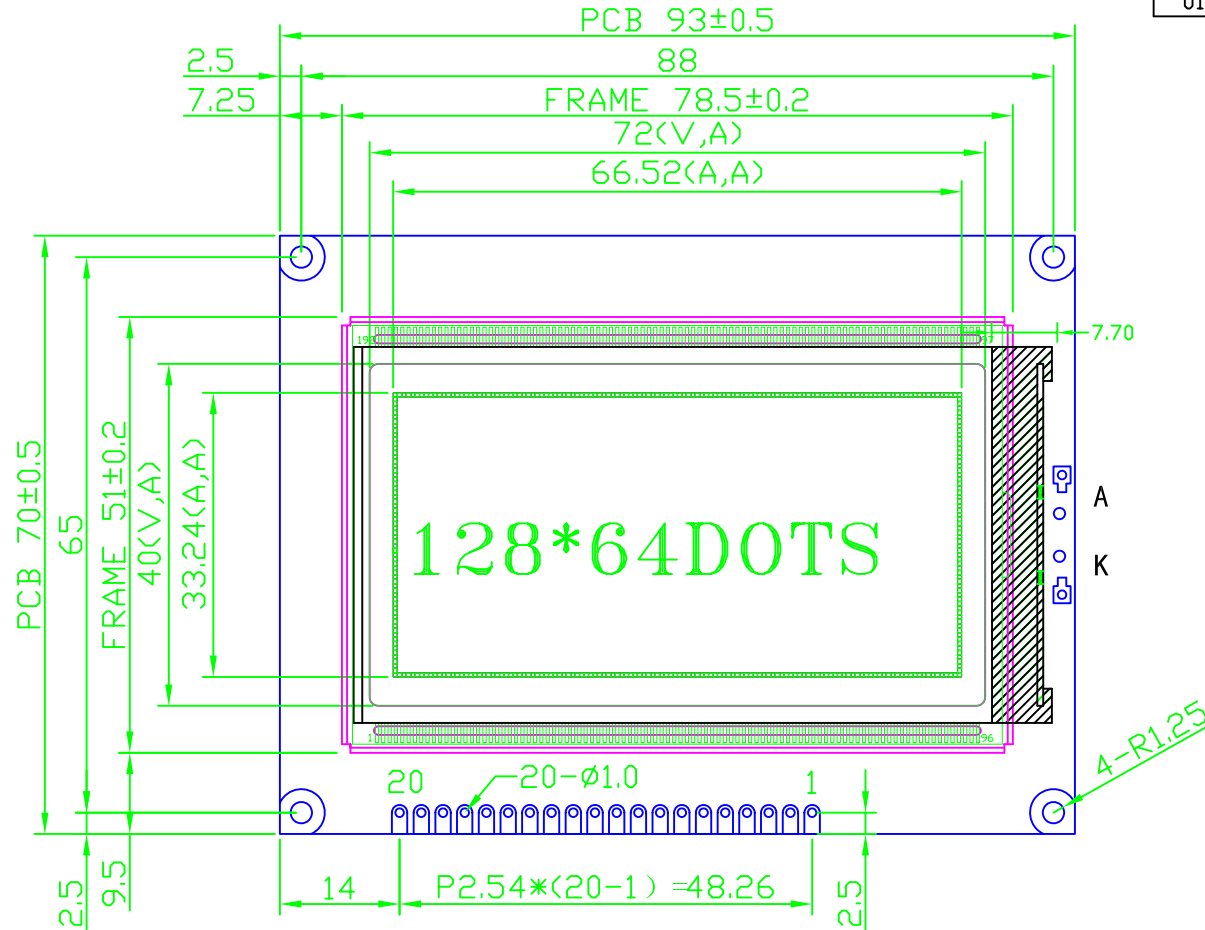

PIN NO.	SYMBOL
1	VSS
2	VDD
3	V0
4	D/I
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RES
18	Vout
19	A
20	K

NOTES:

1. DRIVE METHOD: 1/64DUTY, 1/9BIAS,VOP9.0V,VDD5.0V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN(blue), TRANSMISSIVE/NAGETIVE,
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION:COB.
7. BACK LIGHT: WHITE
8. IC:S6B0107 EQU***
9. NOT DIMENSION TOLERANCES IS ±0.2.



DESCRIPTION:		C/D 结构图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER : JBG12864K01-08W	PART NO:
APPROVALS	DATE		
APP:			
CHK:			
DWN: ZY.CHEN	Mar-31-2007	DO NOT SCALE THIS DRAWING.	PROJECTION