
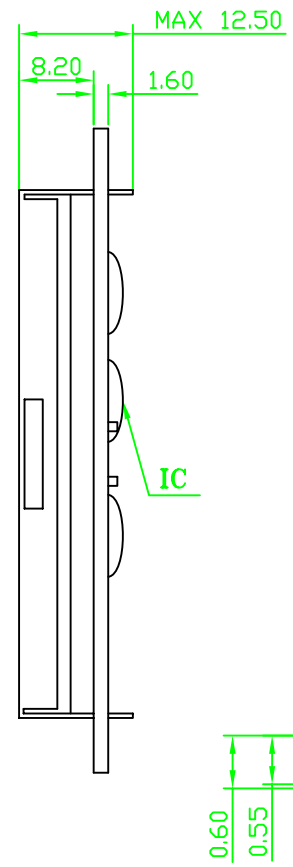


请客户签字回传:

REV	DESCRIPTION:	DATE
00	FIRST ISSUE	2009/03/09

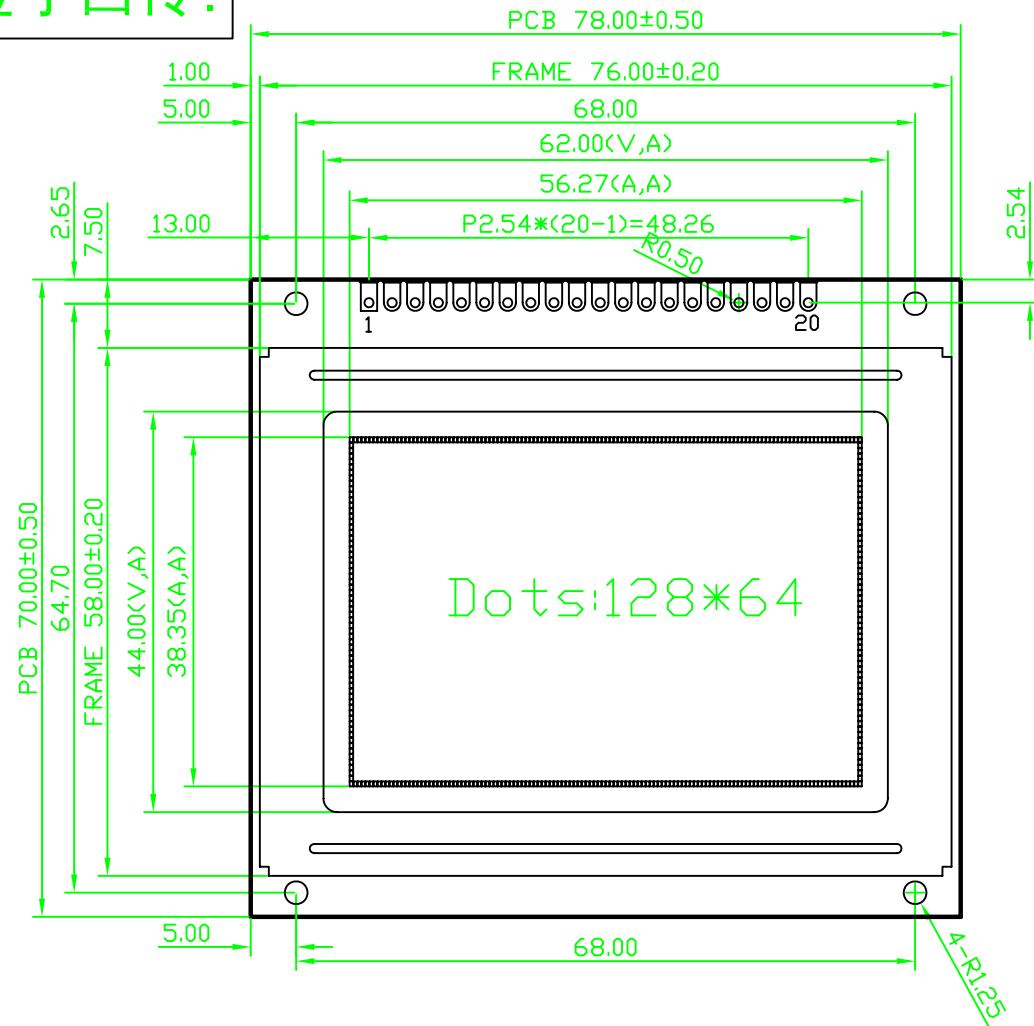

PIN NO.	SYMBOL
1	CS1
2	CS2
3	VSS
4	VDD
5	V0
6	RS
7	R/W
8	E
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	RES
18	Vout
19	A
20	K

NOTES:

1. DRIVE METHOD: 1/64DUTY, 1/9BIAS,VOP10.0V,VDD5.0V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN(Y-G), TRANSFLECTIVE/POSITIVE,
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION:COB.
7. BACK LIGHT: YELLOW-GREEN.
8. IC:S6B0107,S6B0108..
9. NOT DIMENSION TOLERANCES IS ±0.2.

DESCRIPTION: **C/D 结构图**

SCALE: FIT

SHEET: 1 OF 1

GENERAL TOL: ± 0.20mm UNIT mm

APPROVALS DATE

APP: MODEL NUMBER : **JBG12864R01-00F-A50**

CHK: PART NO:

DWN: ZQS 2009/03/09 DO NOT SCALE THIS DRAWING. PROJECTION

深圳市兴宇合电子有限公司