

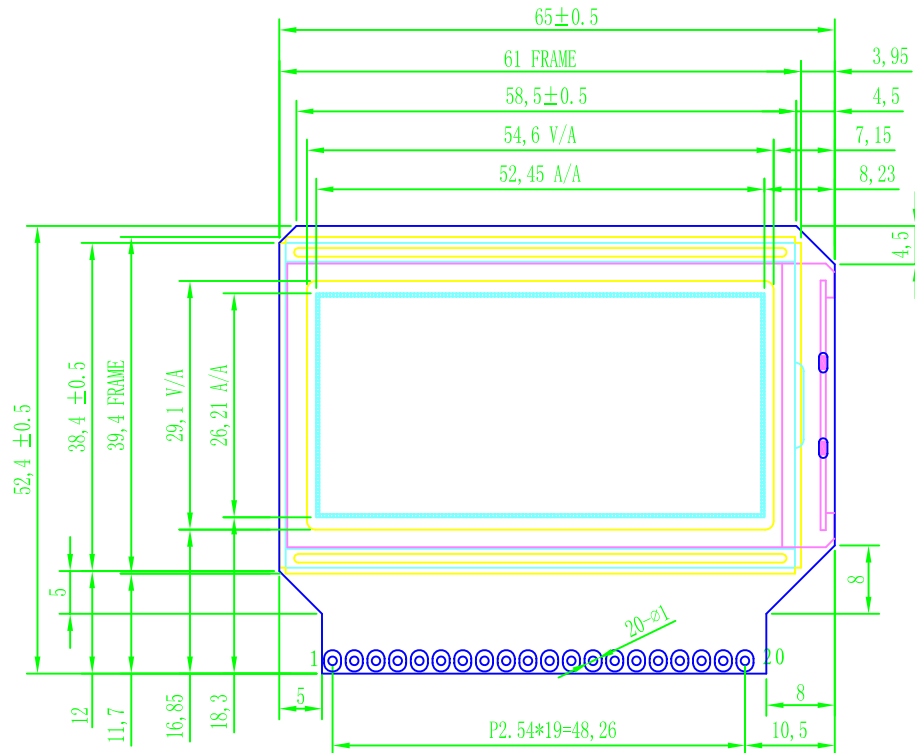


REV	DESCRIPTION:	DATE
00	First Issue	2009/04/07
01	将厚度8.3降低到7.3以下，背光只能用侧部光,PCB也延长,LCD为0.7mm。	2009/04/10

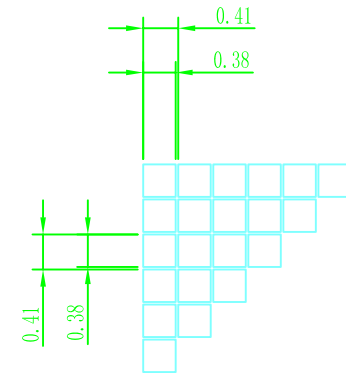

PIN NO.	1	2	3	4	5	6	7~14	15	16	17	18	19	20
SYMBOL	VSS	VDD	V0	RS	R/W	E	D0~D7	CS1	CS2	/RST	VEE	LED+	LED-

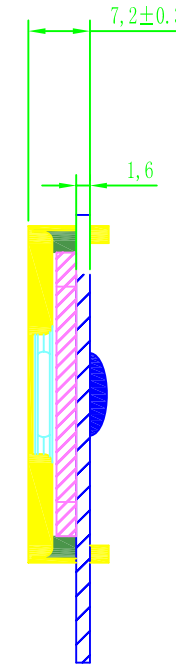

PCB背后的元件及
铁框扭脚高度不得
超过2.5MM!!!!!!

NOTE:

DISPLAY TYPE : STN TRANSMISSIVE-NEGATIVE-BLUE
VIEWING DIRECTION: 6: 00
OPERATING VOLT. : Vlcd=12.0V
OPERATING TEMP. : -20℃ ~ +70℃
STORAGE TEMP. : -30℃ ~ +80℃
DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V
LED : WHITE VLED=5.0V
DRIVER IC : S6B0107,S6B0108*2

DESCRIPTION:		C/D 外型图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 2			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER : JBG12864S00-00Y	
APPROVALS	DATE		
APP:		PART NO:	
CHK:			
DWN: DAP	2009/04/07	DO NOT SCALE THIS DRAWING.	PROJECTION