



请客户仔细确认

PIN NO.	SYMBOL
1	FG
2	VSS
3	VDD
4	V0
5	WR
6	RD
7	CE
8	C/D
9	RSTB
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	A
20	K

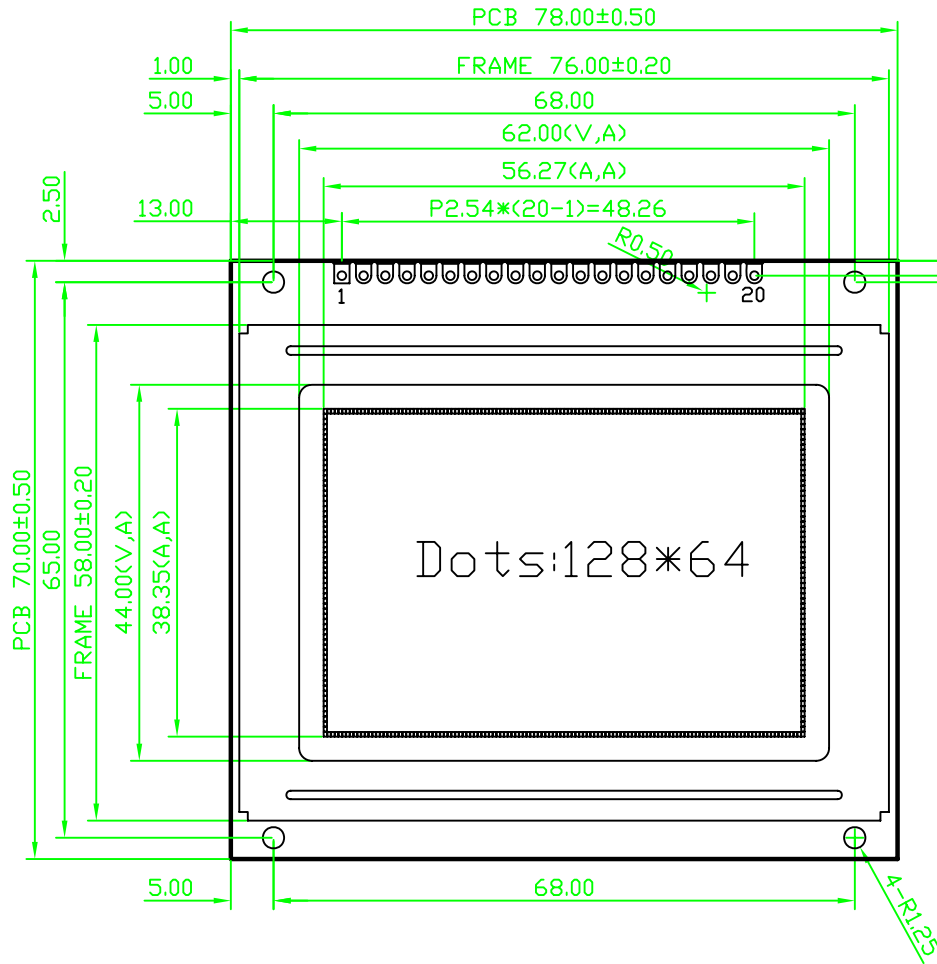

REV	DESCRIPTION:	DATE
00	First Issue	2011.11.01

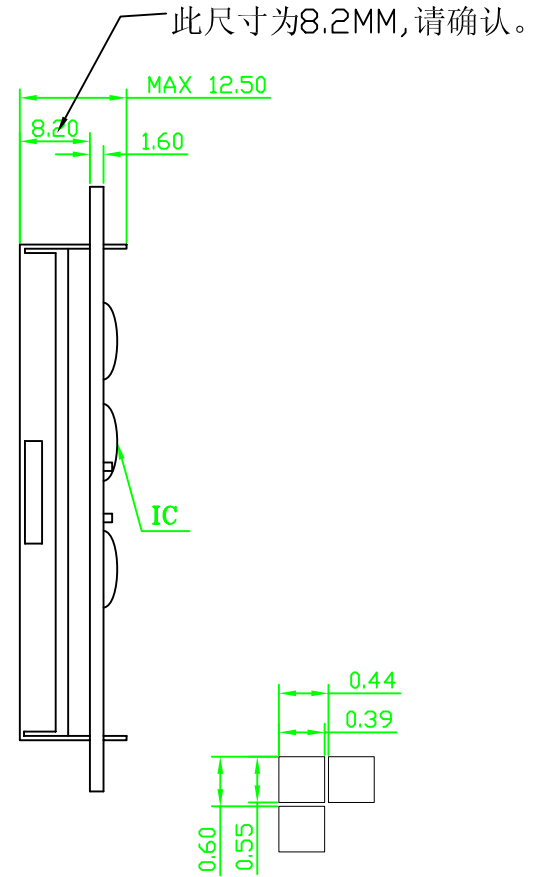

NOTES:

1. DRIVE METHOD: 1/64DUTY, 1/9BIAS, VDD5.0V.
2. VIEWING ANGLE: 6 O'CLOCK.
3. DISPLAY TYPE: STN(Y/G), TRANSFLECTIVE/POSITIVE,
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION: COB.
7. BACK LIGHT: YELLOW-GREEN
8. DRIVER_IC:T6963 EQU **
9. NOT DIMENSION TOLERANCES IS ±0.2.

DESCRIPTION:		C/D 结构图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER: JBG12864T00-00F	PART NO:
APPROVALS	DATE		
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION
CHK:			
DWN: LAO	2011.11.01		