



REV	DESCRIPTION:	DATE
00	First issue	2010.03.18

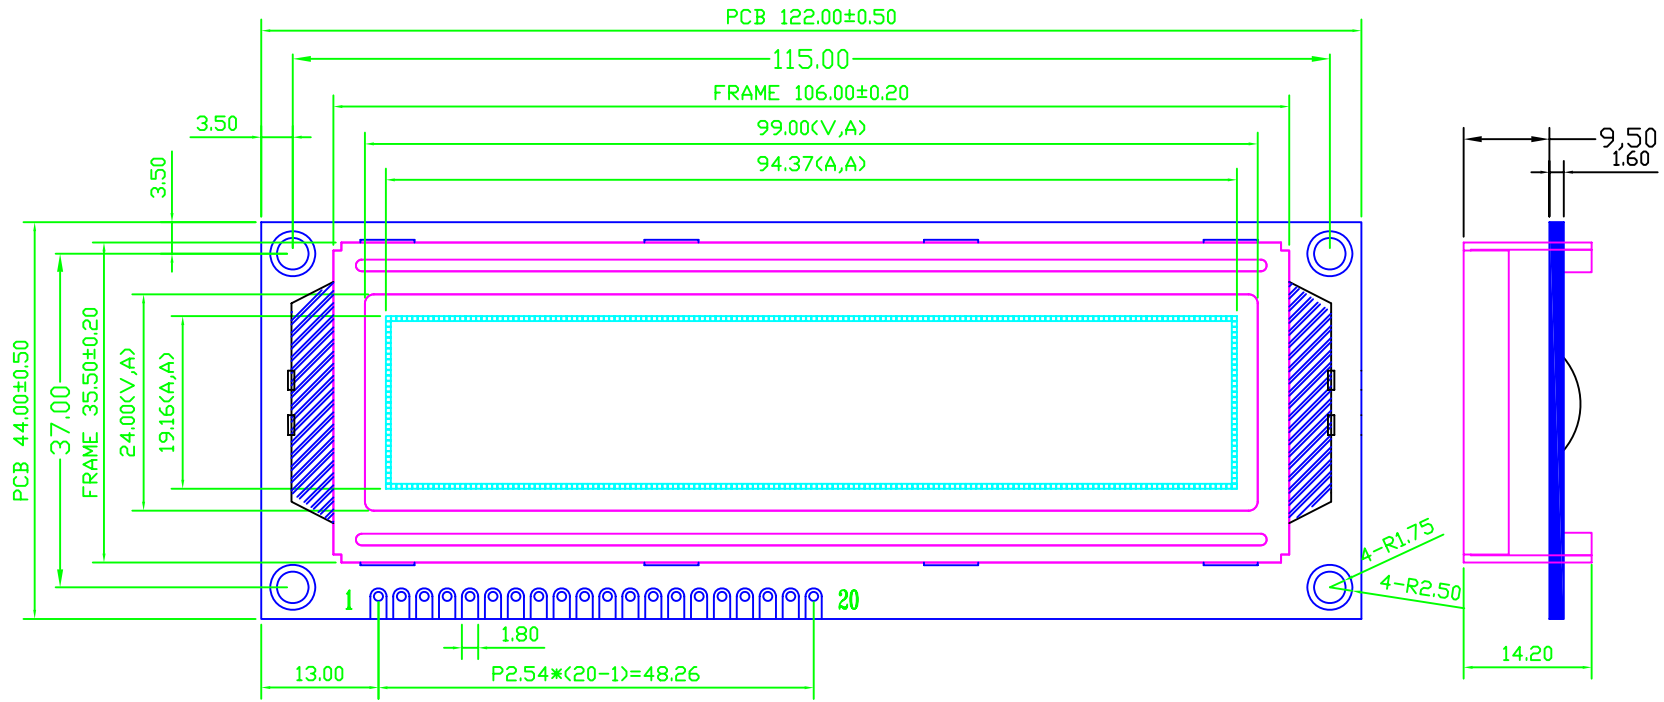

CON1	
1	VSS
2	VDD
3	VO
4	RS
5	R/V
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	FSB
16	RST
17	VOUT
18	LED+
19	LED-
20	NC



- NOTES:
1. DRIVE METHOD: 1/32DUTY, 1/6BIAS, VDD 5V, VOP 5.0V
 2. VIEWING ANGLE: 6 O'CLOCK.
 3. DISPLAY TYPE: STN(BLUE)/TRANSMISSIVE/NEGATIVE.
 4. OPERATING TEMP: -20° C TO 70° C.
 5. STORAGE TEMP: -30° C TO 80° C.
 6. CONNECTION: PIN.
 7. IC: ST7920,ST7921
 8. BACK LIGHT: WHITE ILED<60mA
 9. NOT DIMENSION TOLERANCES IS ± 0.2.

DESCRIPTION:		C/D 结构图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER :	PART NO:
APPROVALS	DATE	JBG16032B00-08W-B50	
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION
CHK:			
DWN: zqs	2010.03.18		