


PIN	NAME
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	RESET
17	CS2
18	CS3
19	VEE
20	LED_A

REV	DESCRIPTION:	DATE
A00	First issue	20120107

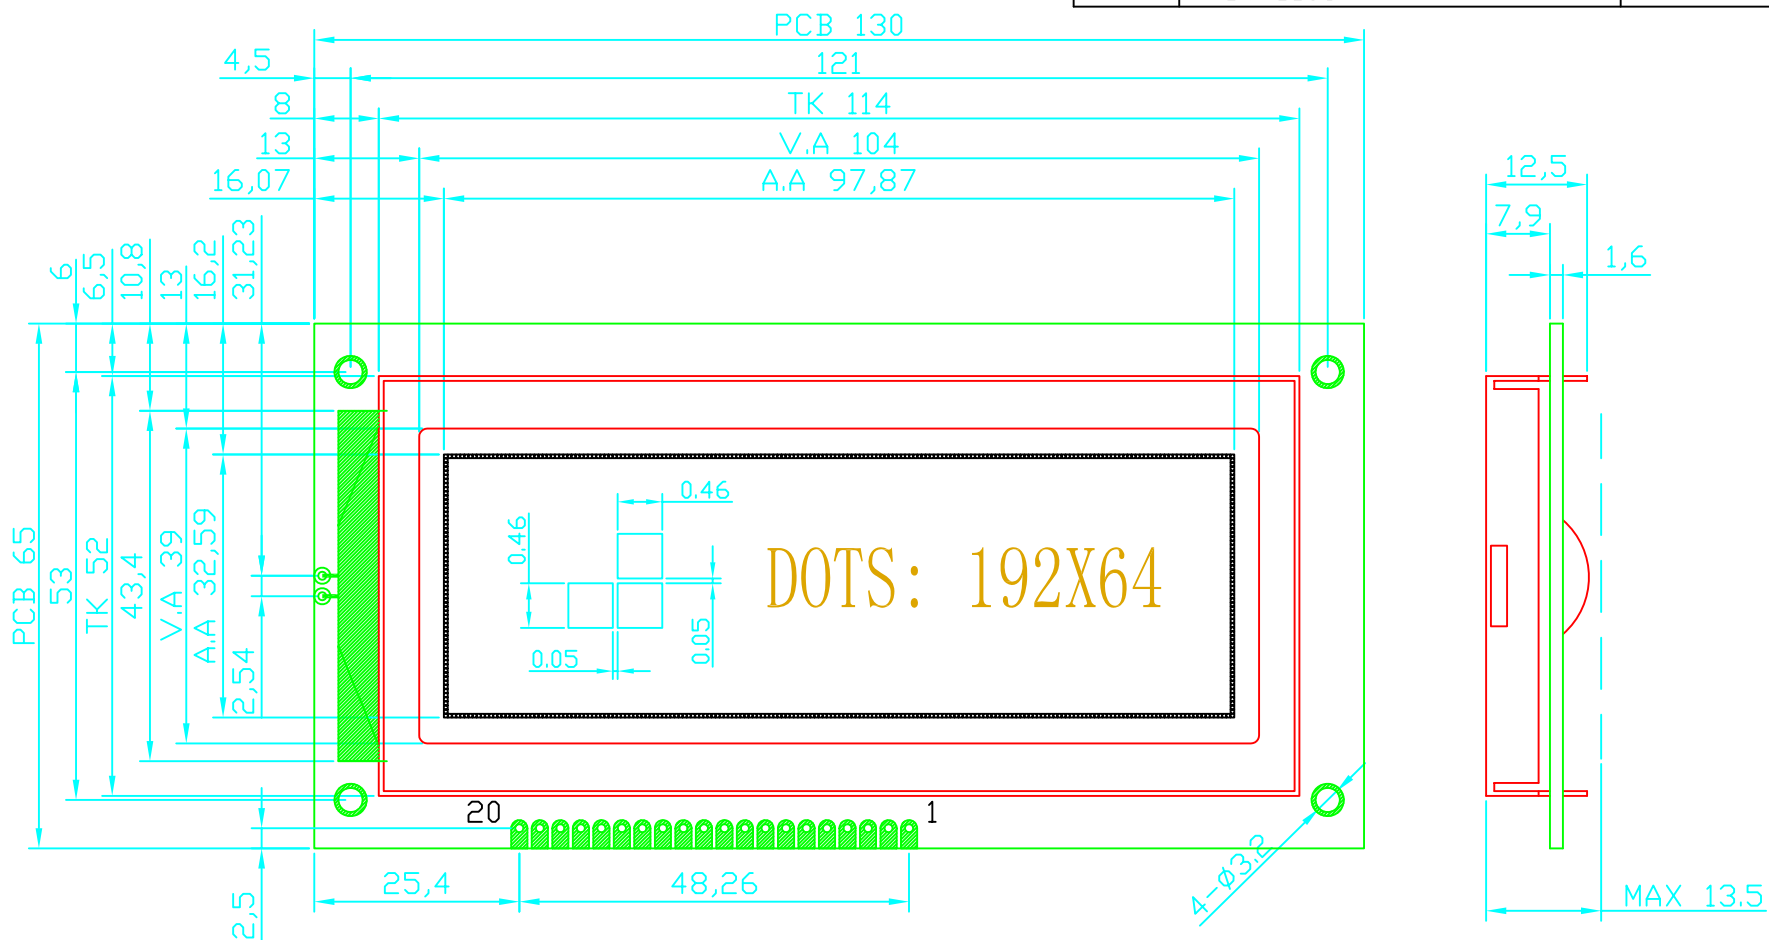

**SPECIFICATIONS**

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VLCD= 9.0V VDD=5.0V  
 DISPLAY MODE : STN (Y/G) TRANSFLECTIVE POSITIVE MODE  
 BACK LIGHT: WHITE Color  
 DRIVER IC : SBN6400 EQU\*\*

↑  
VIEWING DIRECTION

DESCRIPTION:		<b>C/D</b> 外型图	
SCALE: FIT		<b>深圳市兴宇合电子有限公司</b>	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER: <b>JDL19264E00-00W</b>	PART NO:
APPROVALS	DATE		
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION
CHK:			
DWN: ZQS	20120107		

