
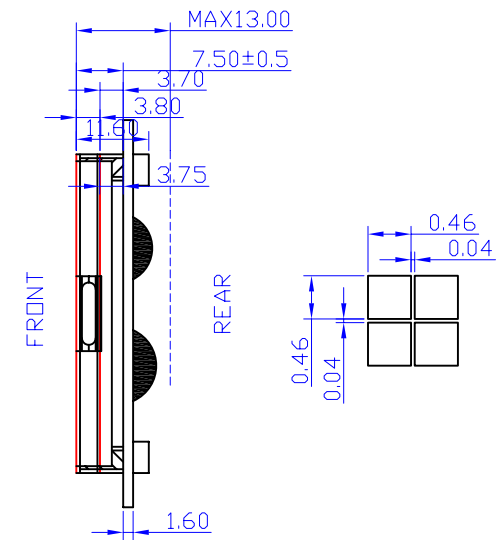


请客户签字回传:


版本	更改内容:	设计日期:
00	FIRST ISSUE	2010.11.18

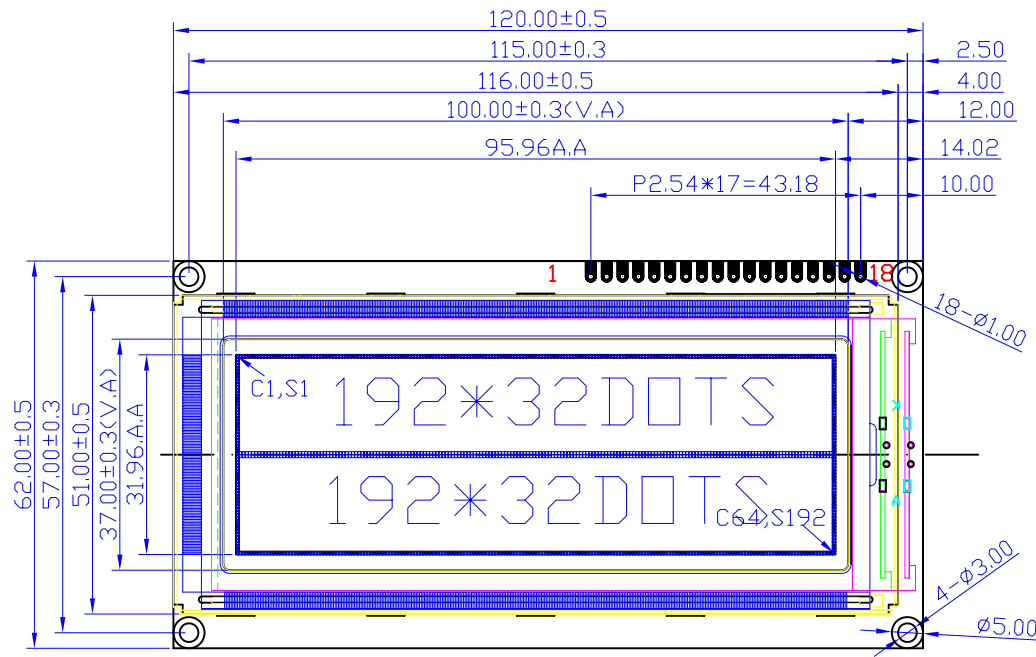

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
SYMBOL	VSS	VDD	VO	RS	R/W	CEH1	CEH2	DO	D1	D2	D3	D4	D5	D6	D7	RES	A(5.0)	K(0V)

NOTE:

1. DISPLAY TYPE: STN(BLUE)-NEGATIVE
2. DISPLAY MODE: TRANSMISSIVE
3. DRIVE METHOD: 1/32 DUTY, 1/5 BIAS, VLCD=6.0V , VDD=5.0V
4. VIEWING DIR. : 6:00
5. OP. TEMP. : -20° C~70° C
6. ST. TEMP. : -30° C~80° C
7. BACKLIGHT: COLOR-WHITE, Vf=5.0±0.2V
8. DRIVER IC:ST7920(2), ST7921(4)

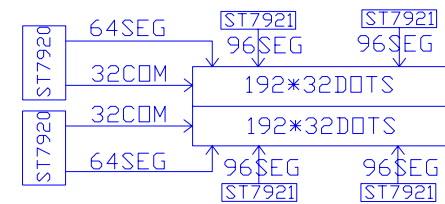

深圳市兴宇合电子有限公司

SCALE: FIT	LCM工程图	
页数: 1 OF 1	MODEL NUMBER: JBG19264G00-08W	
允许公差: 0.3mm	审核: 日期:	客户型号:
比例: 1:1 单位: mm	初审: 日期:	DO NOT SCALE THIS DRAWING. PROJECTION
设计人: LWQ 日期: 2010.11.18		