


REV	DESCRIPTION:	DATE
A00	在240128B01-08W基础上改为黄绿膜黄绿背光	2011.10.14
A01	更改电压3.3V	2011.11.01

PIN	NAME
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	CE
8	RS
9	/RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS1
19	VOUT
20	LED_A
21	LED_K
22	NC

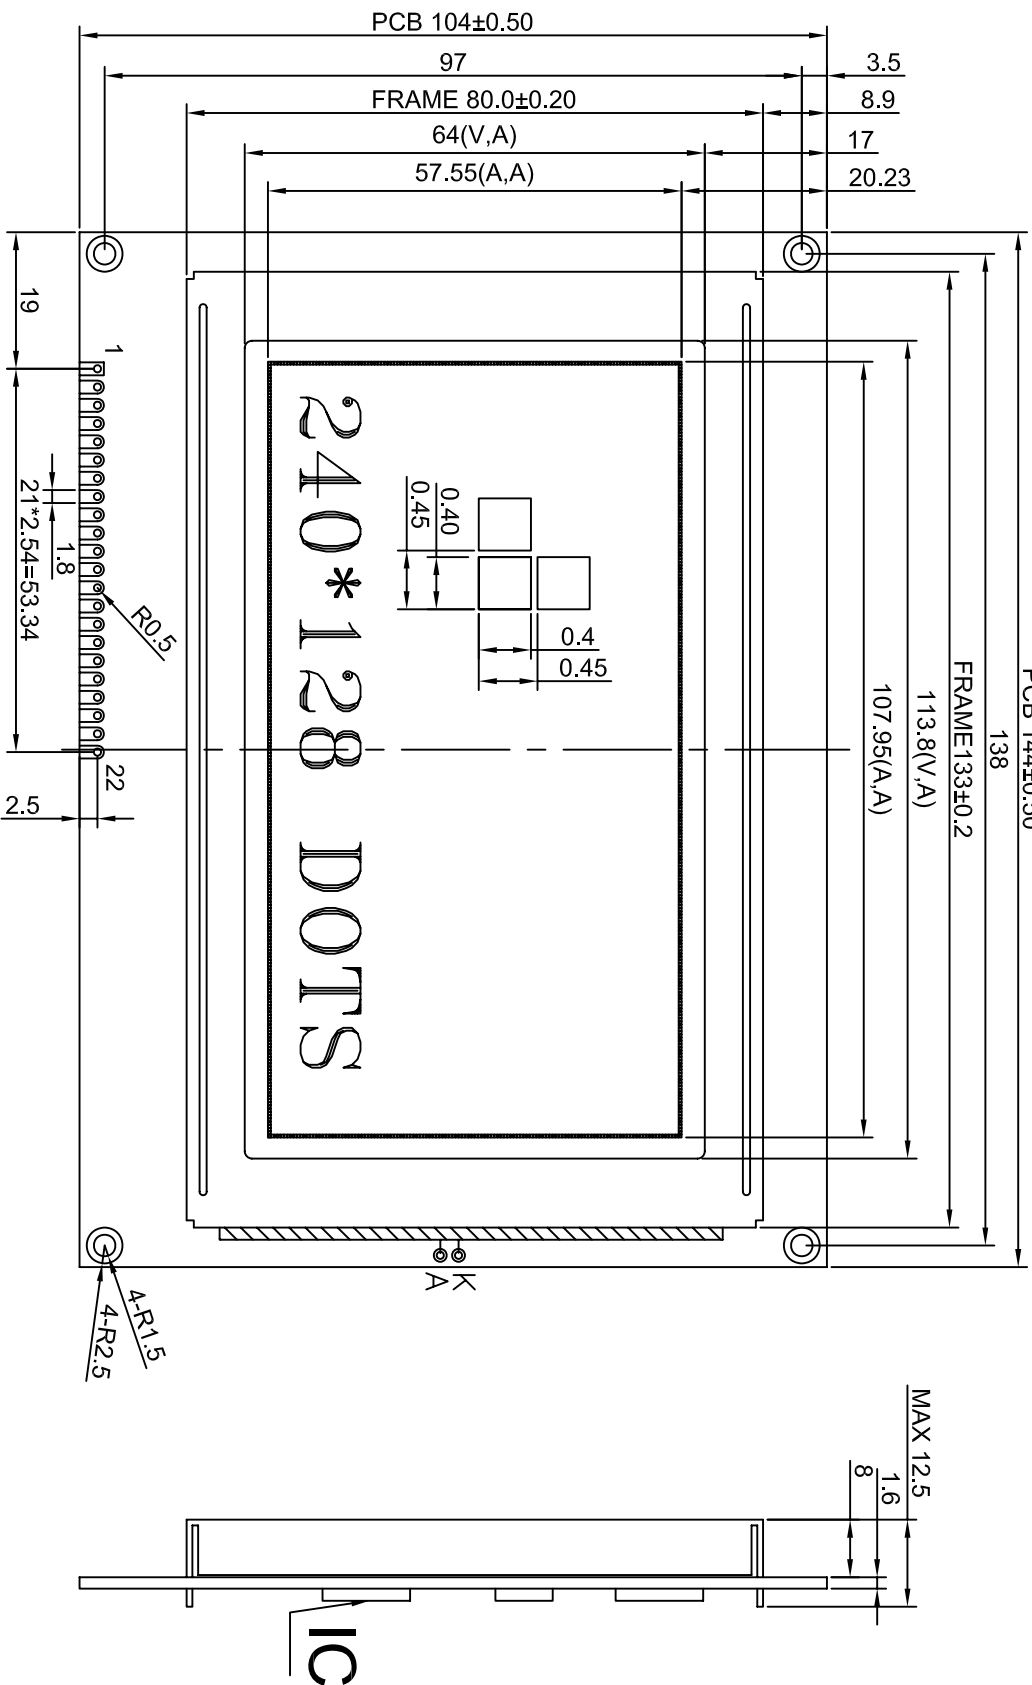

NOTES:

1. DRIVE METHOD: 1/128DUTY, 1/12BIAS, VOP15.6V, VDD3.3V.
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: STN(Y-G), TRANSPARENT/POSITIVE.
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION: COB.
7. BACK LIGHT: Y-G, VLED 3.3V ILED<150mA.
8. IC: T6963C.
9. NOT DIMENSION TOLERANCES IS ±0.2.



深圳市兴宇合电子有限公司

LCM 结构图

SCALE: FIT	MODEL NUMBER: JBG240128B01-00F-A31	客户型号:
页数: 1 OF 1	审核: 日期:	
允许公差: 0.3 mm	初审: 日期:	
比例: 1:1	设计: LWQ 日期: 11.11.01	
单位: mm	DO NOT SCALE THIS DRAWING.	PROJECTION