


请确认图传

PIN	NAME
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	CE
8	RS
9	/RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS1
19	VOUT
20	LED_A
21	LED_K
22	NC

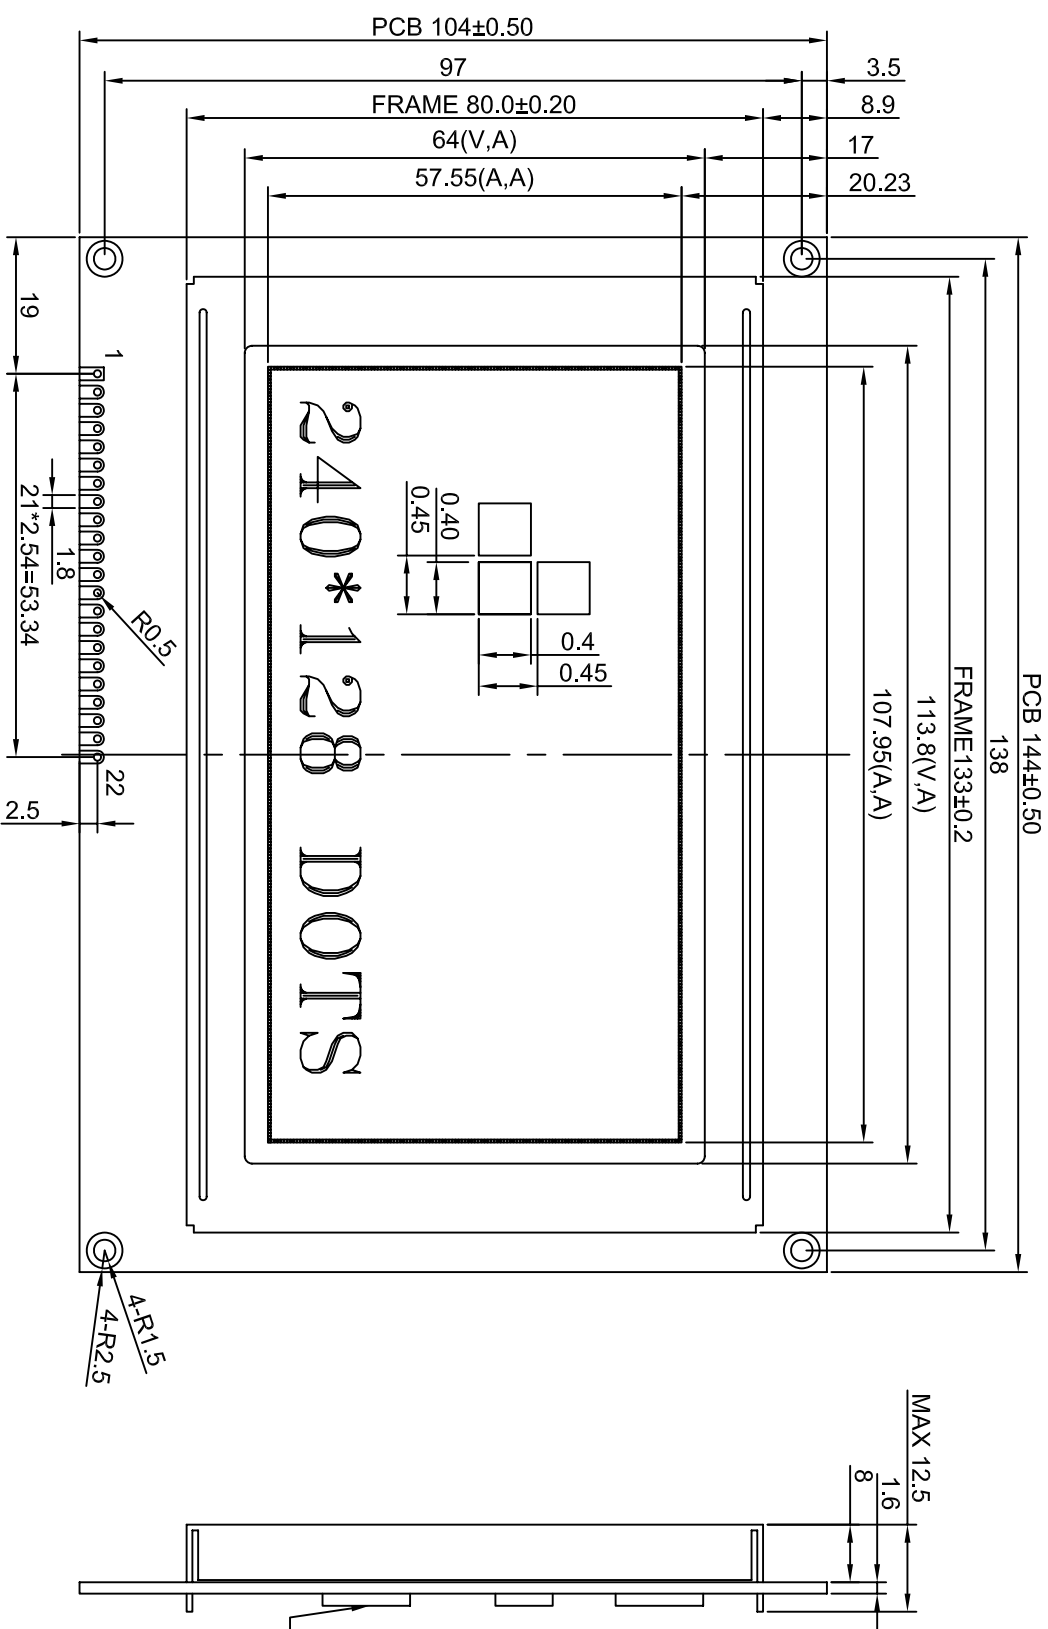

NOTES:

1. DRIVE METHOD: 1/128DUTY, 1/12BIAS, VOP15.6V, VDD5.0V.
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: STN(BLUE), TRANSMISSIVE/NEGATIVE.
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION: COB.
7. BACK LIGHT: WHITE, VLED 5.0V ILED<150mA.
8. IC: T6963C.
9. NOT DIMENSION TOLERANCES IS ±0.2.

REV	DESCRIPTION:	DATE
A00	First Issue	20080811

DESCRIPTION:

C/D 外型图

深圳市兴宇合电子有限公司

SCALE:	FTT
SHEET:	1 OF 1
GENERAL TOL:	UNIT
± 0.20mm	mm
APPROVALS	DATE
APP:	
CHK:	
DWVN:	常东
20080611	
MODEL NUMBER:	JBG240128B01-08W
DO NOT SCALE THIS DRAWING.	PROJECTION
PART NO:	

1 2 3 4 5 6