



PIN NO	SYMBOL
1	Vss
2	Vdd
3	Vo
4	A0
5	CS1
6	CS2
7	CL(NC)
8	E(NC)
9	R/W
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	RES
19	A
20	K

REV	DESCRIPTION:	DATE
A00	First issue	Dec-31-2006

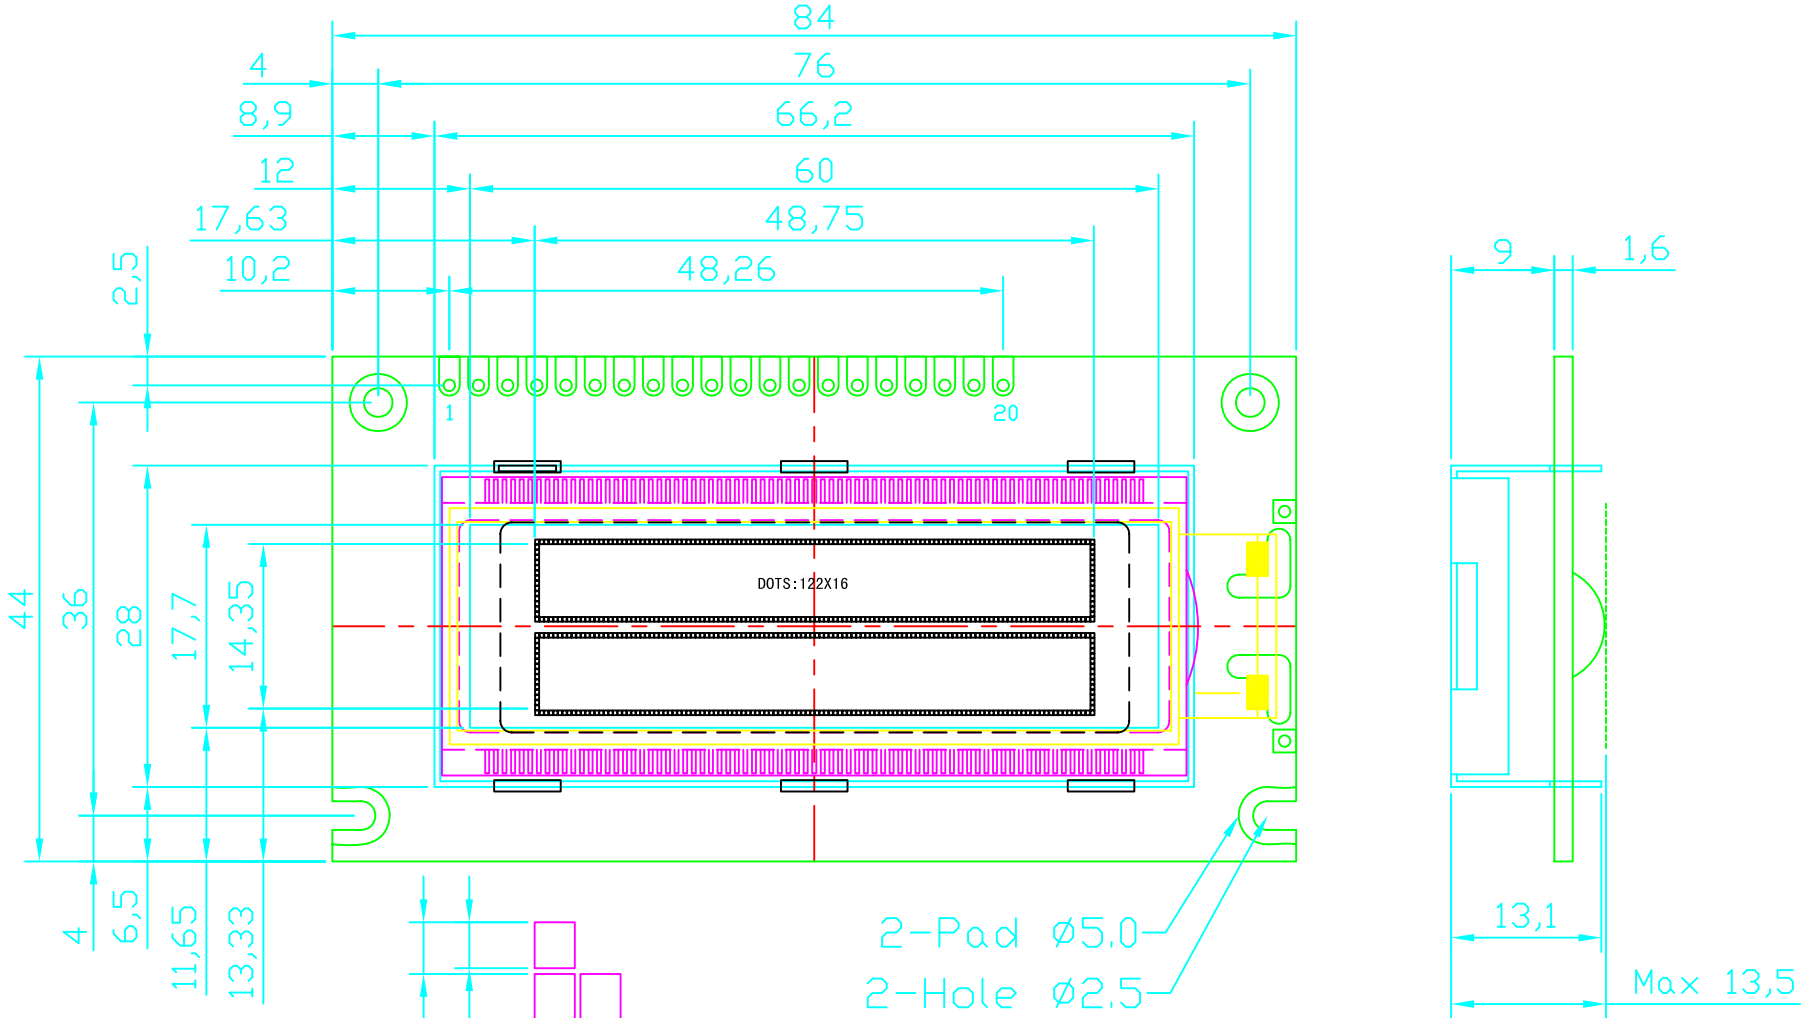

2-Pad $\phi 5.0$
2-Hole $\phi 2.5$

↑
VIEWING DIRECTION

SPECIFICATIONS

STORAGE TEMP : -20°C TO +70°C
 OPERATING TEMP : -10°C TO +60°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/32 DUTY, 1/5 BIAS, VLCD=4.7V
 DISPLAY MODE : STN,blue,Transmissive,Negative,MODE
 BACKLIGHT: White color Vled=3.0v
 DRIVER IC: SED1520

DESCRIPTION:		C/D 结构图	
SCALE:	FIT	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	$\pm 0.20\text{mm}$	UNIT	mm
APPROVALS	DATE	MODEL NUMBER :	PART NO:
APP:		JBG12232A03-08w	
CHK:			
DWN: ZY.CHEN	Dec-31	DO NOT SCALE THIS DRAWING.	PROJECTION

