



PIN NO	SYMBOL
1	Vss
2	Vdd
3	Vo
4	A0
5	CS1
6	CS2
7	CL<NC>
8	E<NC>
9	R/W
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	RES
19	A
20	K

REV	DESCRIPTION:	DATE
A00	First issue	Jan-19-2007

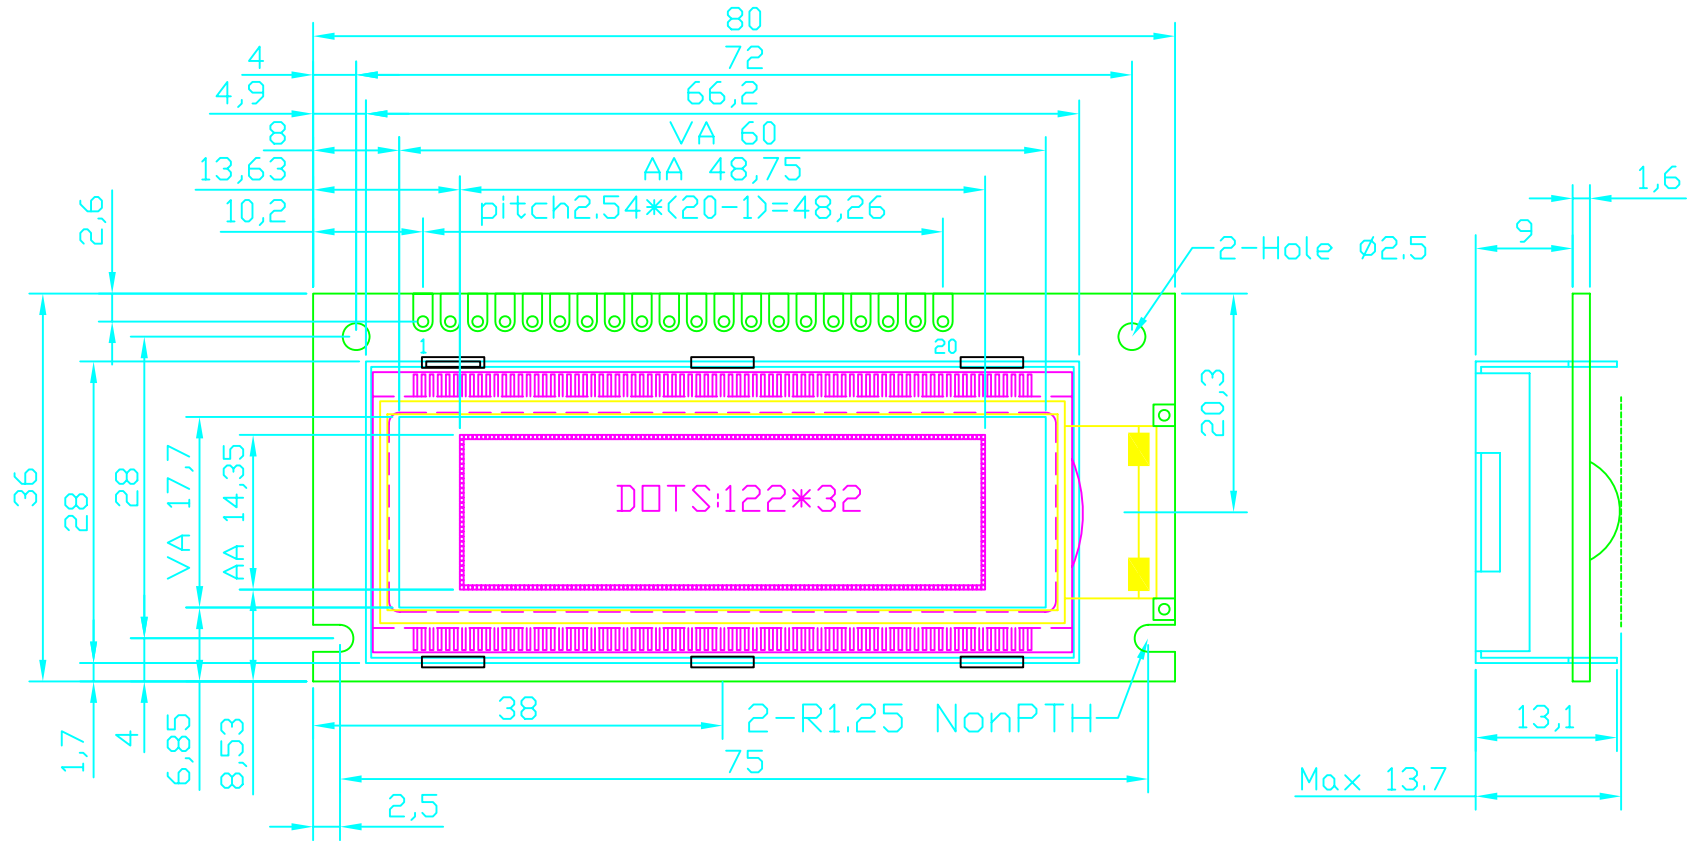

**SPECIFICATIONS**

STORAGE TEMP : -20°C TO +70°C  
 OPERATING TEMP : -10°C TO +60°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/32 DUTY, 1/5 BIAS, VLCD=4.7V  
 DISPLAY MODE : STN,blue,Transmissive,MODE  
 DRIVER IC : ST7920  
 BACKLIGHT: White color V=3.0V

DESCRIPTION:		<b>C/D 结构图</b>	
SCALE: FIT		<b>深圳市兴宇合电子有限公司</b>	
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm	MODEL NUMBER : <b>JBG12232A07-08W</b>	PART NO:
APPROVALS	DATE		
APP:		DO NOT SCALE THIS DRAWING.	PROJECTION
CHK:			
DWN: ZY.CHEN	Jan-19-2007		