


| PIN | NAME  |
|-----|-------|
| 1   | GND   |
| 2   | VDD   |
| 3   | VEE   |
| 4   | RS    |
| 5   | R/W   |
| 6   | E     |
| 7   | DB0   |
| 8   | DB1   |
| 9   | DB2   |
| 10  | DB3   |
| 11  | DB4   |
| 12  | DB5   |
| 13  | DB6   |
| 14  | DB7   |
| 15  | /CS1  |
| 16  | /CS2  |
| 17  | RESET |
| 18  | VOUT  |
| 19  | LED_A |
| 20  | LED_K |

| REV | DESCRIPTION: | DATE        |
|-----|--------------|-------------|
| A00 | First issue  | DEC-26-2006 |

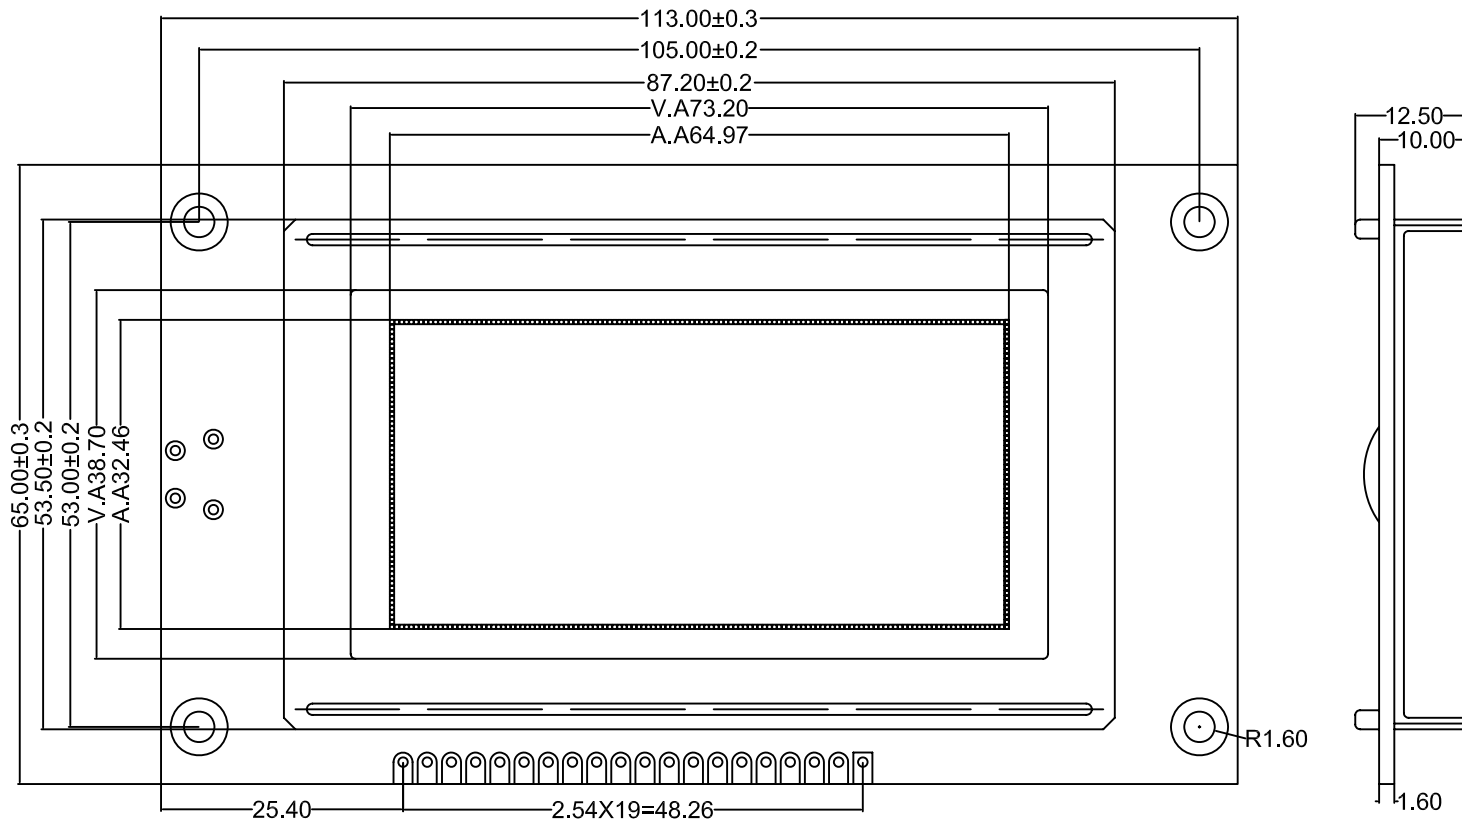

### SPECIFICATIONS

STORAGE TEMP : -20°C TO +70°C  
 OPERATING TEMP : -10°C TO +60°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/64 DUTY, 1/9 BIAS, VLCD=13.0V  
 DISPLAY MODE : STN(BLUE) TRANSMISSIVE N MODE  
 BACK LIGHT ITEM: WHITE;5.0V OR Y/G;5.0V  
 LCM OPERATING VOLTAGE:5.0V  
 CONTROLLER/DRIVER IC: SBN6400

|              |           |                                   |            |
|--------------|-----------|-----------------------------------|------------|
| DESCRIPTION: |           | C/D 外型图                           |            |
| SCALE:       | FIT       | 深圳市兴宇合电子有限公司                      |            |
| SHEET:       | 1 OF 1    |                                   |            |
| GENERAL TOL: | UNIT      | MODEL NUMBER :<br>JBG12864A00-08W | PART NO:   |
| ± 0.20mm     | mm        |                                   |            |
| APPROVALS    | DATE      |                                   |            |
| APP:         |           |                                   |            |
| CHK:         |           | DO NOT SCALE THIS DRAWING.        | PROJECTION |
| DWN: QBL     | DEC-26-06 |                                   |            |