
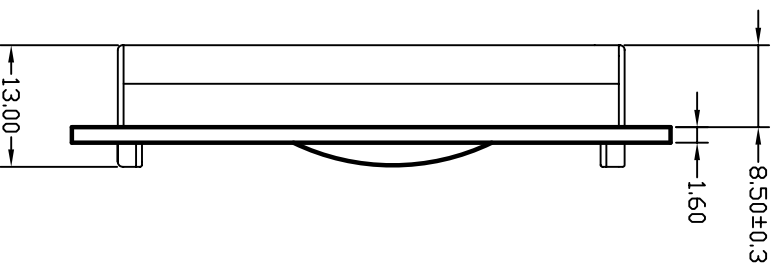


REV	DESCRIPTION:	DATE
00	在 JBG12864G02 基础上改为串口	2011.5.5

PIN	MANE
1	GND
2	VDD
3	V0
4	CS
5	SID
6	SCLK
7	NC (DB0)
8	NC (DB1)
9	NC (DB2)
10	NC (DB3)
11	NC (DB4)
12	NC (DB5)
13	NC (DB6)
14	NC (DB7)
15	NC (PSB)
16	NC
17	/REST
18	VEE
19	A
20	K

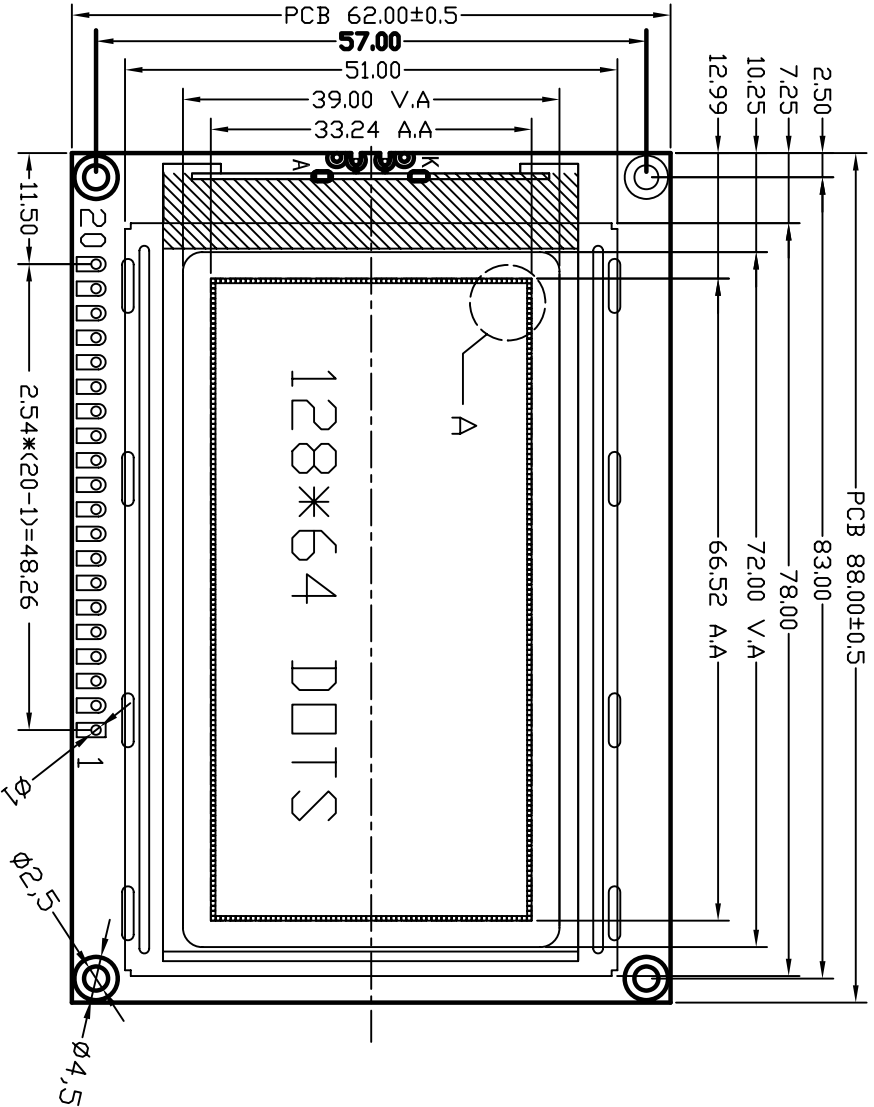

**SPECIFICATIONS**

DISPLAY MODE: STN BULE NEGATIVE, TRANSMISSIVE  
 DRIVE CONDITION: 1/32 DUTY 1/6 BIAS, VDD=5.0V  
 VIEWING DIRECTION: 6 0' CLOCK  
 OPERATING TEMP: -20° C TO 70° C  
 STORAGE TEMP: -30° C TO 80° C  
 DRIVER IC : ST7920  
 BACKLIGHT: WHITE 3PCS



深圳市兴宇合电子有限公司

LCM工程图

SCALE: 1:1	UNIT: mm	MODEL NUMBER:	客户型号:
页数: 1 OF 1	允许公差: 0.3mm	JBG12864G02-08W-1	
比例: 1:1	单位: mm	审核:	DPO NOT SCALE THESE DRAWINGS. PROJECTION
日期:	日期:	初审:	
设计人: LMO	日期: 2011.5.5		