
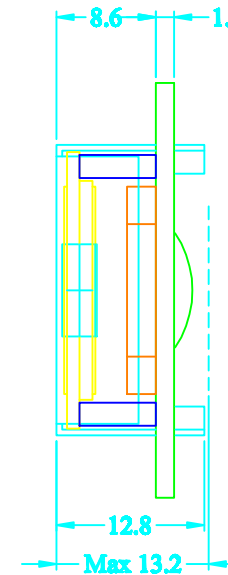


PN NO.	SYMBOL
1	VSS
2	VDD
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A/Vcc
16	K


REV	DESCRIPTION:	DATE
A00	First issue	Dec-20-2006

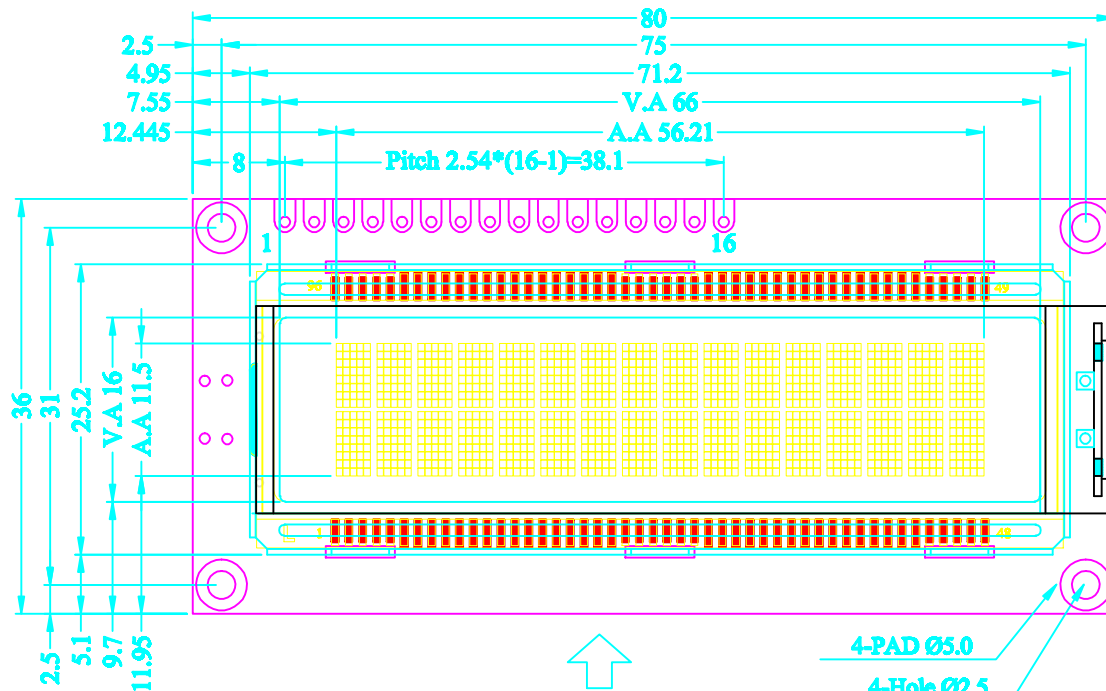

↑  
VIEWING DIRECTION

4-PAD Ø5.0  
4-Hole Ø2.5

LED B/L



SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C  
 OPERATING TEMP : -20°C TO +70°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.0V LCM=5.0V  
 DISPLAY MODE : STN,BLUE,TRANSMISSIVE,NEGATIVE,MODE  
 BACKLIGHT: White color 2PCS

DESCRIPTION:		C/D 结构图	
SCALE:	1:1	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	UNIT:	mm
APPROVALS	DATE	MODEL NUMBER:	PART NO:
APP:		JBC162H02-08W	
CHK:			
DWN: ZY.CHEN	Dec-20	DO NOT SCALE THIS DRAWING.	PROJECTION

A

B

C

D

A

B

C

D

1

2

3

4

5

6