
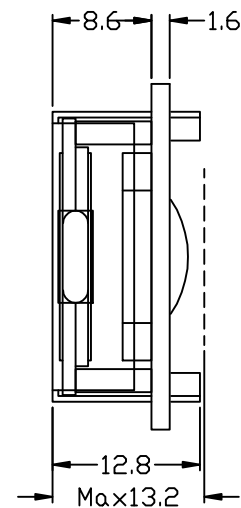



PIN NO	SYMBOL
1	VDD
2	VSS
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7

REV	DESCRIPTION:	DATE
00	First issue	JAN-08-2008

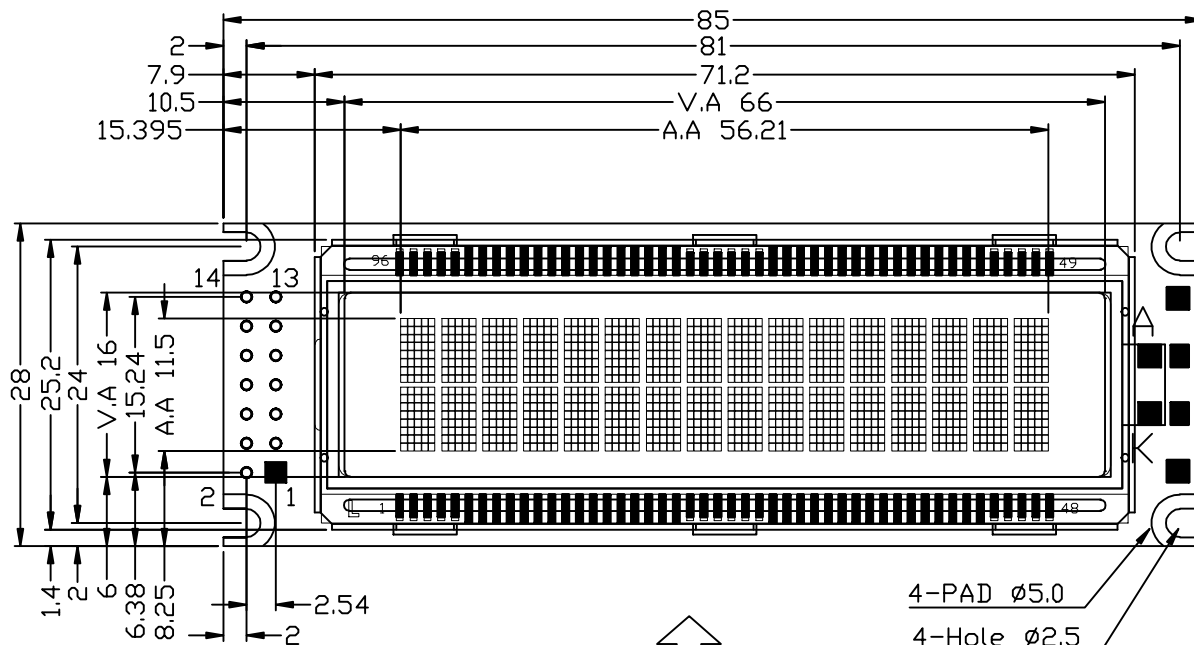

LED B/L

VIEWING DIRECTION



SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°C
 OPERATING TEMP : -20°C TO +70°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.0V VDD=5V
 DISPLAY MODE : STN,Y/G,Transflective,Positive,MODE
 BACKLIGHT: LED, BOTTOM(yellow-green)
 DRIVER IC: ST7066U

DESCRIPTION:		C/D 结构图	
SCALE:	1:1	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	UNIT	mm
APPROVALS	DATE	MODEL NUMBER:	PART NO:
APP:		JBC1602H07-00Y	(VC162V)
CHK:			
DWN: ZY.CHEN	JAN-08-2008	DO NOT SCALE THIS DRAWING.	PROJECTION