PIN NO	SYMBOL
1	VDD
2	VSS
3	Vo
4	RS
5	R/$\overline{W}$
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7

REV	DESCRIPTION:	DATE
00	First issue	20100929

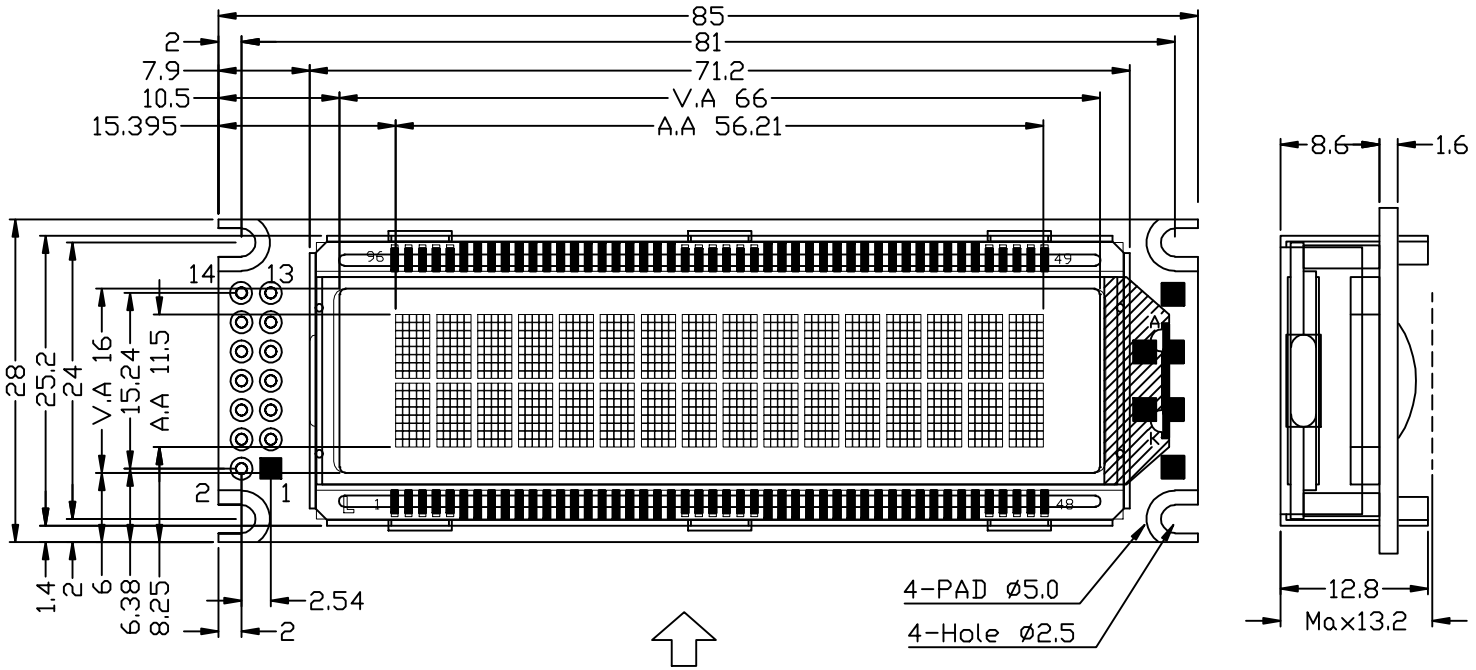

LED B/L

VIEWING DIRECTION



SPECIFICATIONS

STORAGE TEMP : −30°C TO +80°C
OPERATING TEMP : −20°C TO +70°C
VIEWING DIRECTION : 6 O'CLOCK
DRIVE CONDITION : 1/16 DUTY, 1/4 BIAS, VLCD=4.0V
DISPLAY MODE : STN(BLUE),Transmissive Negative,MODE
BACKLIGHT: LED, Edge(WHITE)

DESCRIPTION:	C/D 结构图		
SCALE: FIT	深圳市兴宇合电子有限公司		
SHEET: 1 OF 1			
GENERAL TOL: ± 0.20mm	UNIT mm		
APPROVALS	DATE	MODEL NUMBER : JBC1602H07-06W	PART NO: (VC162V)
APP:			
CHK:			
DWN: PLP	20100929	DO NOT SCALE THIS DRAWING.	PROJECTION