
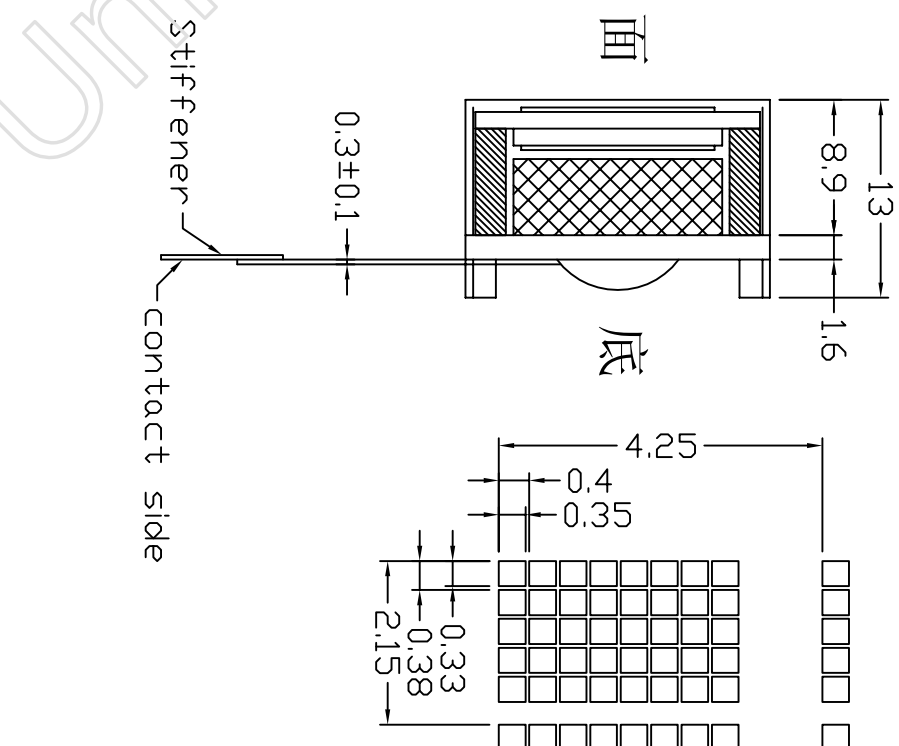


| PIN NO. | NAME |
|---------|------|
| 1       | GND  |
| 2       | VDD  |
| 3       | V0   |
| 4       | RS   |
| 5       | RW   |
| 6       | E    |
| 7       | DB0  |
| 8       | DB1  |
| 9       | DB2  |
| 10      | DB3  |
| 11      | DB4  |
| 12      | DB5  |
| 13      | DB6  |
| 14      | DB7  |
| 15      | A    |
| 16      | K    |

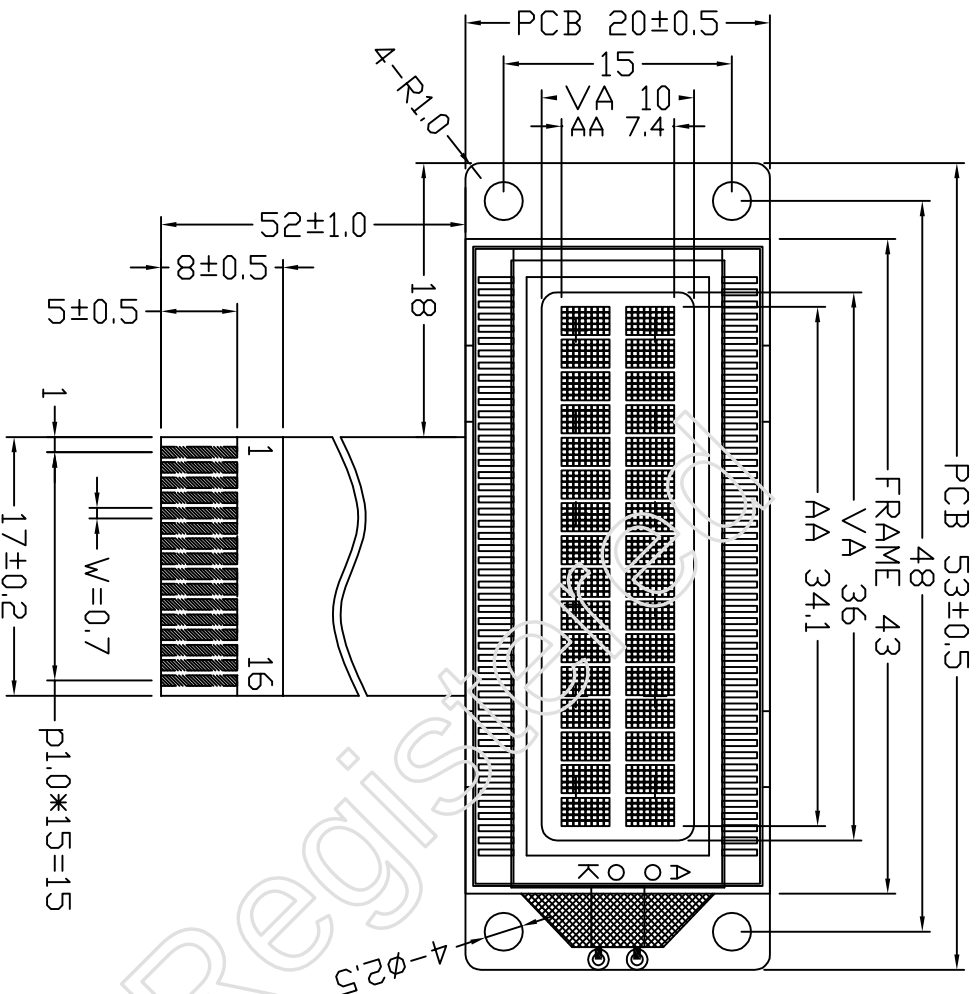

### SPECIFICATIONS

STORAGE TEMP : -30°C TO +80°  
OPERATING TEMP : -20°C TO +70°C  
VIEWING DIRECTION : 6 O'CLOCK  
DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD=4.5V VDD=5.0V  
DISPLAY MODE : STN NEGATIVE TRANSMISSIVE MODE  
DRIVE IC: ST7066U  
BACKLIGHT: LED White Color 1pcs

### DESCRIPTION:

C/D 结构图

### SCALE:

FIT

SHEET: 1 OF 2

GENERAL TOL:  
± 0.30mm

APPROVALS

DATE

CHK:

DWN: ZY.CHEN

深圳市兴宇合电子有限公司

MODEL NUMBER:

JBC1602L00-08W

PART NO:

20071012-1



PROJECTION

DO NOT SCALE THIS DRAWING.