


PIN	NAME
1	GND
2	VDD
3	Vo
4	R8
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED_A
16	LED_K

REV	DESCRIPTION:	DATE
A00	First issue	2009/04/06

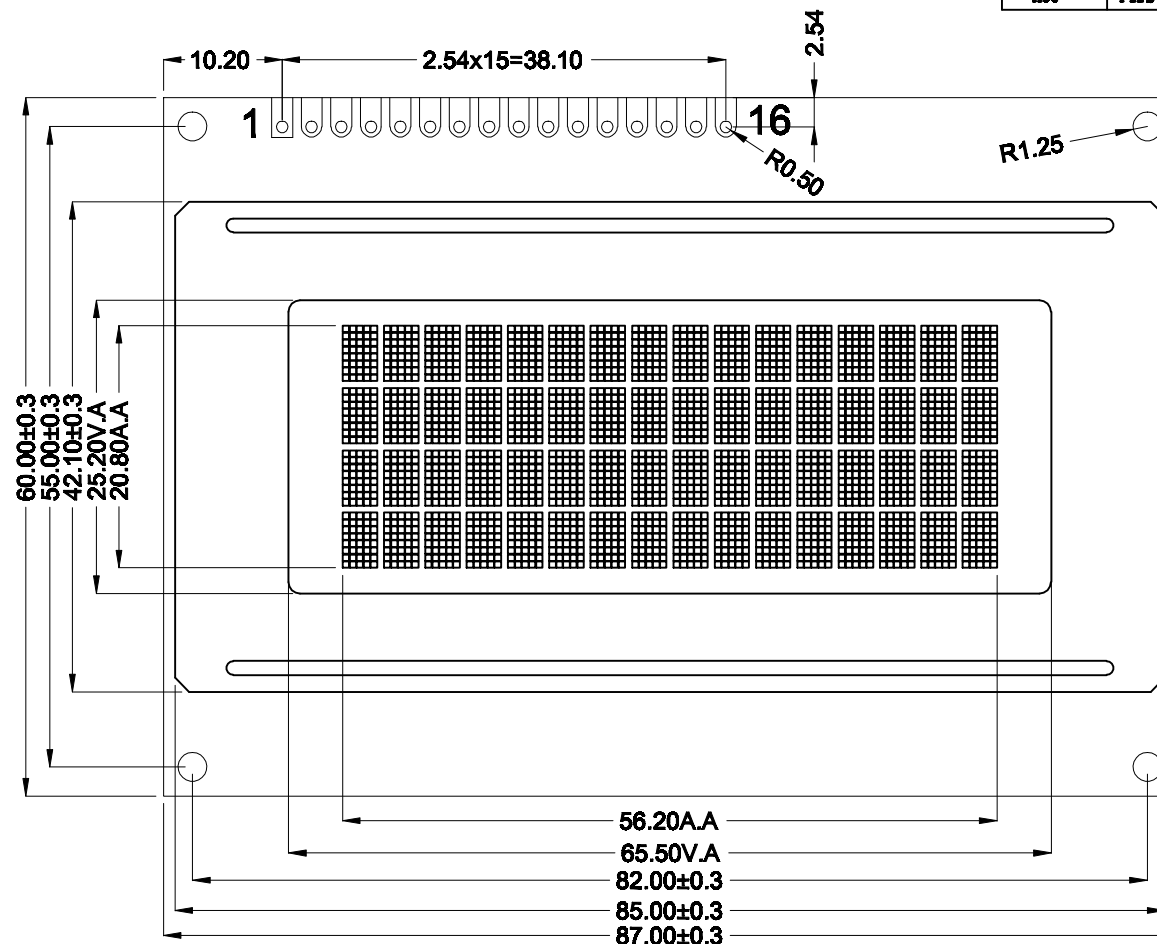

SPECIFICATIONS

STORAGE TEMP : -20°C TO +65°C
 OPERATING TEMP : -10°C TO +55°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD= 4.5V
 DISPLAY MODE : STN(Y/G) TRANSFLECTIVE P MODE
 BACK LIGHT ITEM: Y/G(BOTTOM);5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: *



DESCRIPTION:		C/D 外型图	
SCALE:	1:1	深圳市兴宇合电子有限公司	
SHEET:	1 OF 1		
GENERAL TOL:	± 0.20mm	MODEL NUMBER: JBC1604A00-02Y	
APPROVALS	DATE		
APP:		PART NO:	
CHK:			
DWN: ZQS	2009/04/06	DO NOT SCALE THIS DRAWING.	
		PROJECTION	