

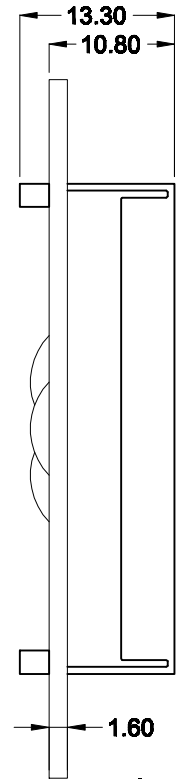


1 2 3 4 5 6

PIN	NAME
1	GND
2	VDD
3	V _o
4	R _B
5	R _W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED_A
16	LED_K

REV	DESCRIPTION:	DATE
A00	1604A00-02Y基础上改为蓝膜白背光	2011.12.21

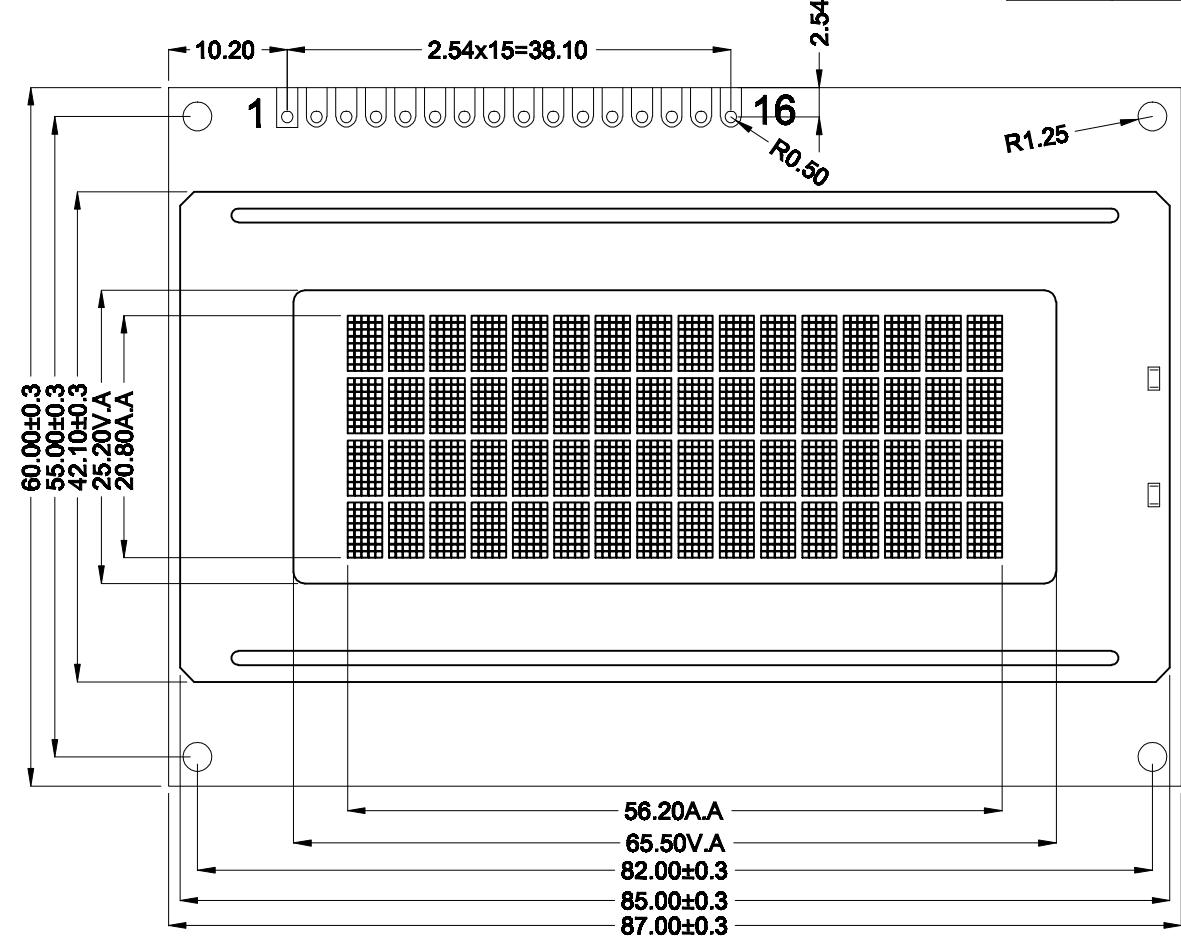

↑
VIEWING DIRECTION

SPECIFICATIONS

STORAGE TEMP : -20°C TO +65°C
 OPERATING TEMP : -10°C TO +55°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/16 DUTY, 1/5 BIAS, VLCD= 4.5V
 DISPLAY MODE : STN(BLUE) TRANSMISSIVE NEGATIVE MODE
 BACK LIGHT ITEM: WHITE/3 DIES;5.0V
 LCM OPERATING VOLTAGE:5.0V
 CONTROLLER/DRIVER IC: *

DESCRIPTION:		C/D 外型图	
SCALE: FIT		深圳市兴宇合电子有限公司	
SHEET: 1 OF 1			
GENERAL TOL:	UNIT	MODEL NUMBER:	PART NO:
± 0.20mm	mm		
APPROVALS	DATE	JBC1604A00-10W	
APP:			
CHK:		DO NOT SCALE THIS DRAWING.	PROJECTION
DWN: LWQ	2011.12.21		

1 2 3 4 5 6